



Dividends Horizon® Beltway Electrical Power Module

1. Remove Beltway Cover
2. Remove screws holding Beltway Skin Bracket (2A), Remove Beltway Skin Bracket (2B).
3. Attach the Beltway Skin Bracket to the Beltway Electrical Channel using (2) #10 x 3/8" screws.
4. A. Rotate the bracket/channel to fit inside the frame and align the screw holes on one side.
B. Reinsert one (1) of the previously removed screws.
C. Rotate channels until screw holes are aligned on the other side of the assembly.
D. Repeat step 4B.


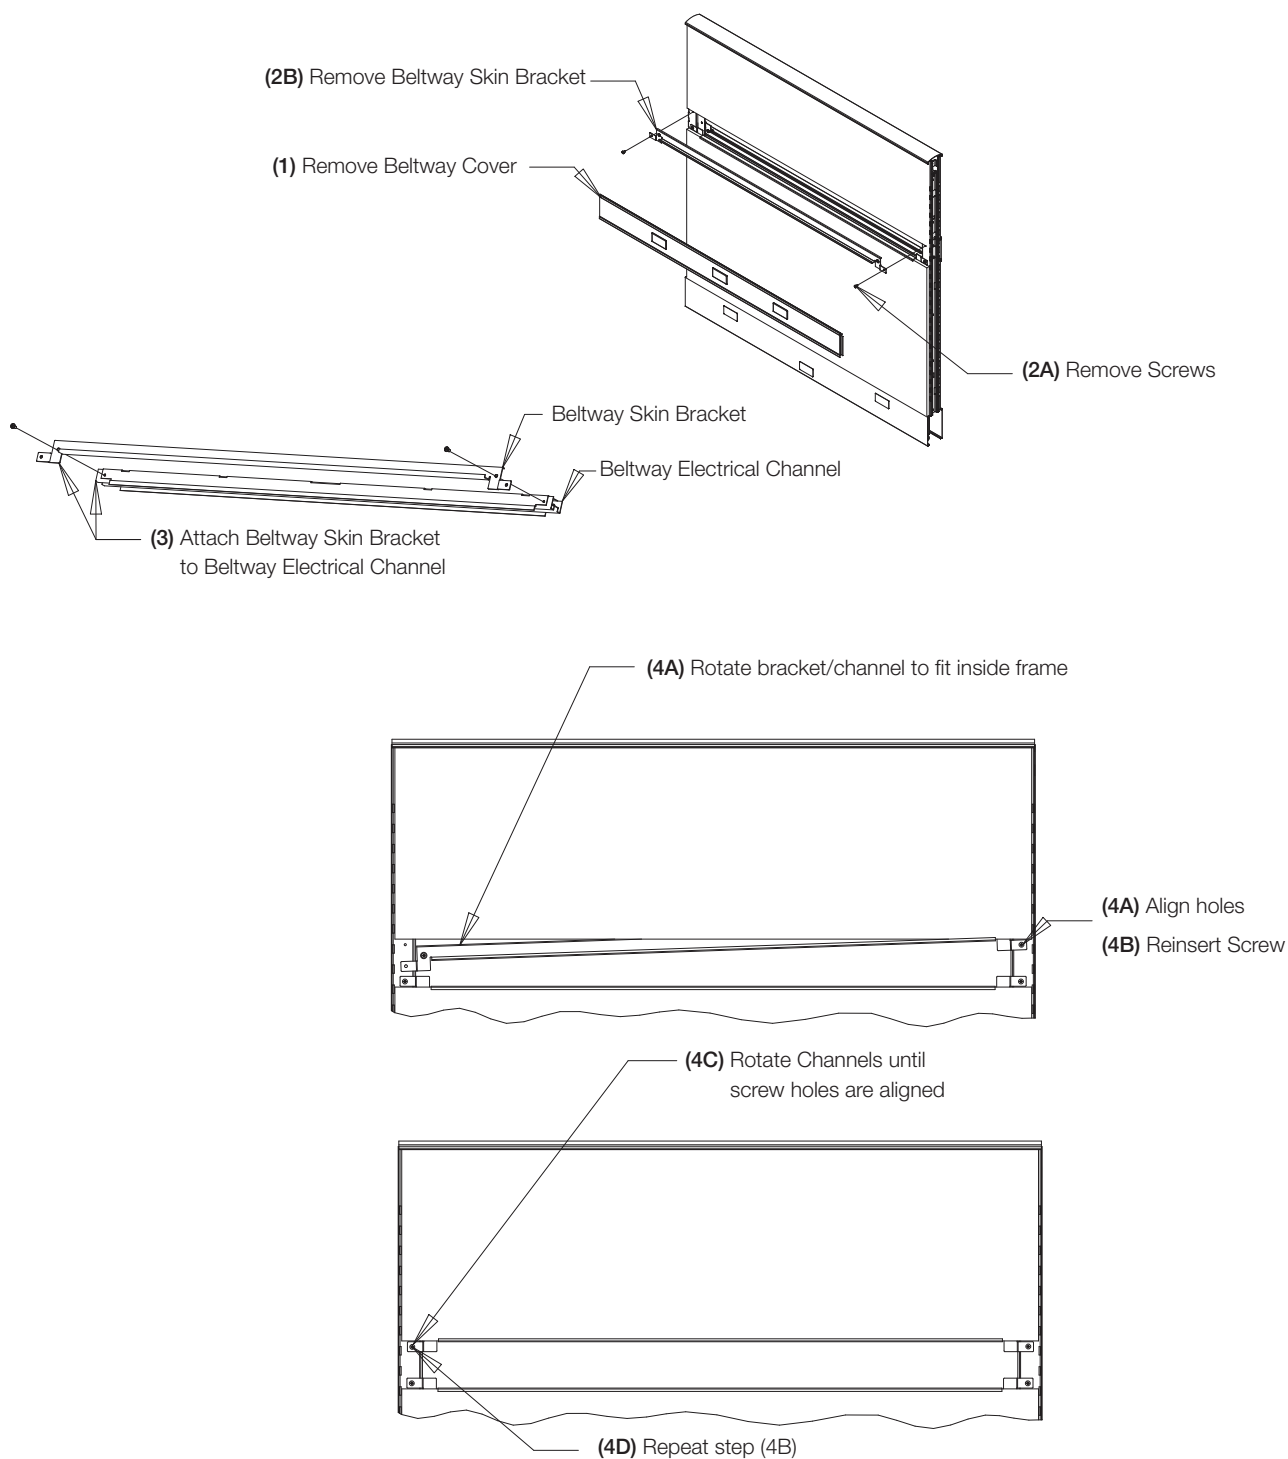


Dividends Horizon® Beltway Electrical Power Module, continued

5. Insert Power Module by
 - A. Hooking plastic end *and*
 - B. swinging into position until tab locks securely.
6. Repeat Steps (5A) and (5B) for opposite side.
7. Engage the Duplexes into the Power Module and secure with the screw provided.
8. Repeat Step (7) for opposite side.
9. Remove outer knock-out covers on the Beltway Cover.
10. Replace the Beltway Cover.

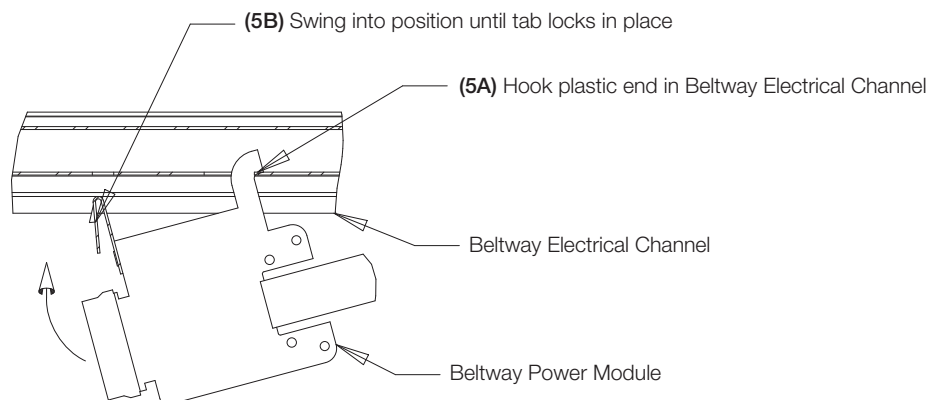

Note: View shown as cross-section for clarity

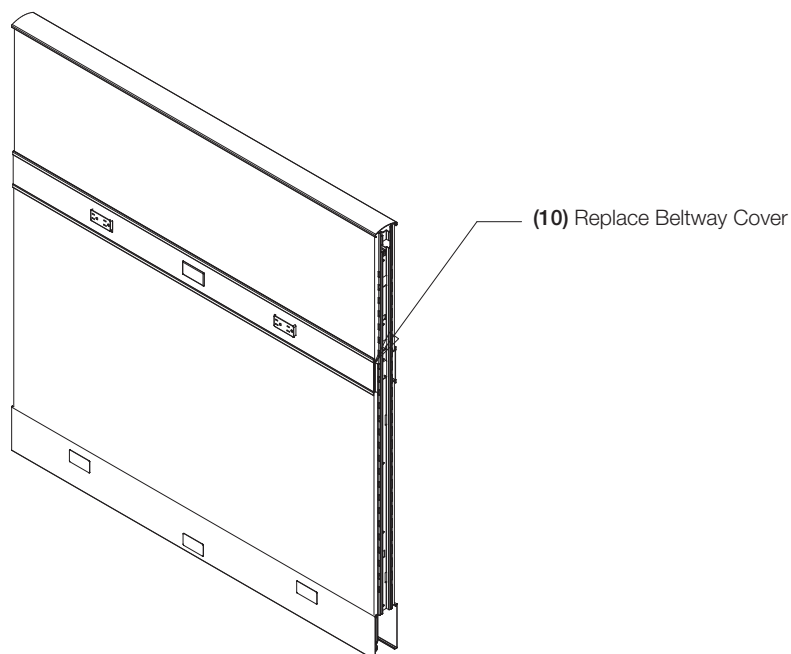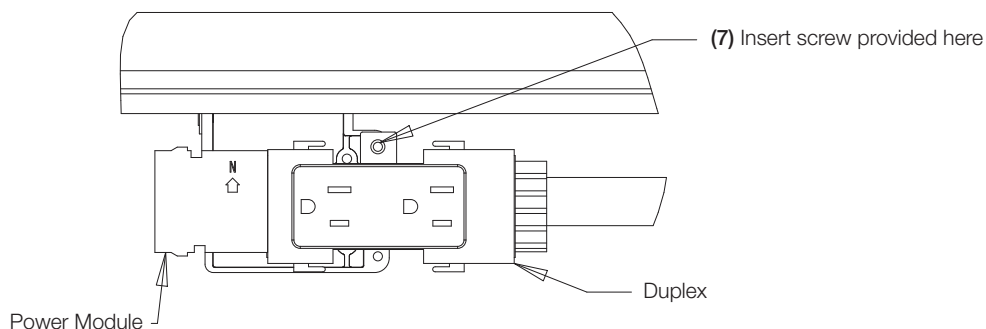

DISASSEMBLY FOR RECYCLING

Materials Identification and Segregation:

Where possible plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non-marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.

To disassemble product, reverse the above installation steps.