Belting Leather




Belting Leather

Spinneybeck Belting Leather can be specified for a wide range of applications including walls and custom furniture. Belting Leather, a 100% vegetable tanned, full grain, aniline dyed leather was originally used as pulley belts in machinery. The thick, firm feel and smooth finish is created from a unique blend of mimosa and chestnut bark. Sourced from a premium selection of European raw material, Spinneybeck Belting Leather is processed in the Santa Croce region of Italy, renowned for its heritage in producing some of the finest quality vegetable tanned leathers.

Available in an exciting range of neutrals and signature brights, Spinneybeck Belting Leather is ideal for precise and refined applications with no reveal, including wall applications or as an inlay for a desk or table. Belting Leather is 3mm thick; the hides are 18 sq. ft., thus allowing for shapes as large as 36" x 48" to be cut and applied to vertical surfaces on a plywood substrate. The pliability of the product allows it to be woven or wrapped around columns for a dramatic and artful installation. Spinneybeck Belting Leather also features a protective water resistant finish making it suitable for residential, corporate, retail, hospitality or educational environments.



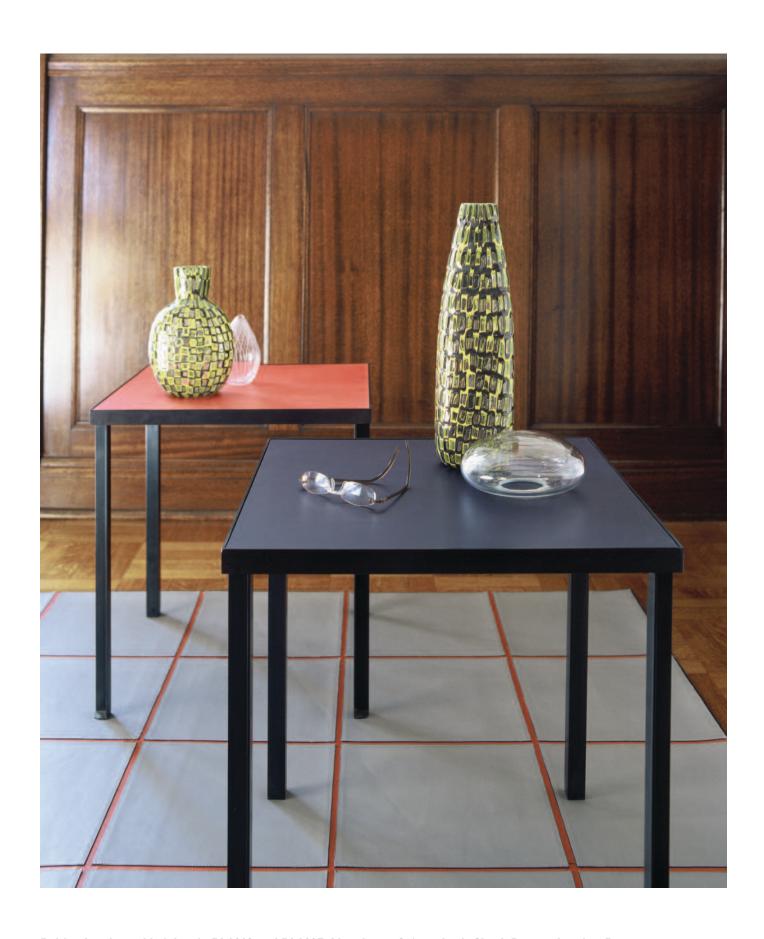

Belting Leather table inlays in BL1913 and BL1907. Also shown, Spinneybeck Check Pattern Leather Rug.







Custom Furniture

The thick, firm feel and smooth texture of Spinneybeck Belting Leather makes it ideal for custom furniture applications. Belting Leather is the only kind of leather used in luxury products that can retain its shape without the need for a separate frame. The heavyweight, full grain, vegetable tanned leather is ideal as a sling on a chair or as an inlay for a desk or table. Spinneybeck also offers leather pulls cut from Belting Leather hides. Custom colors are available upon request.



Belting Leather Product Information



Installation Instructions:

Belting Leather hides are pre-cut to size or shipped uncut to your fabricator or job site. We recommend that the Belting Leather acclimate for a minimum of 7–10 days on-site in order to allow the moisture content to adjust to the environment.

Belting Leather should be installed on 5/8" finish grade plywood for new building installation and a 1/4" multi-ply over existing drywall using premium water-based adhesive. It is important that the surface be clean, dust-free and level, and we recommend that all other construction be completed prior to the application of Belting Leather.

Spinneybeck provides further detailed installation directions with each order.

Maintenance:

It is easy to maintain Spinneybeck Belting Leather with regular dusting and spot cleaning with cool water and a soft cloth. Occasional use of Spinneybeck leather maintenance products is recommended. Other cleaners, such as saddle soaps or household cleaners that contain harsh chemicals, alcohol or ink removers should never be applied to Belting Leather.

All Spinneybeck Leather is tanned, dyed, and finished in Italy, according to the most stringent environmental requirements. Spinneybeck Leathers are GREENGUARD™ Certified.

Contact Spinneybeck for leather samples and additional information.