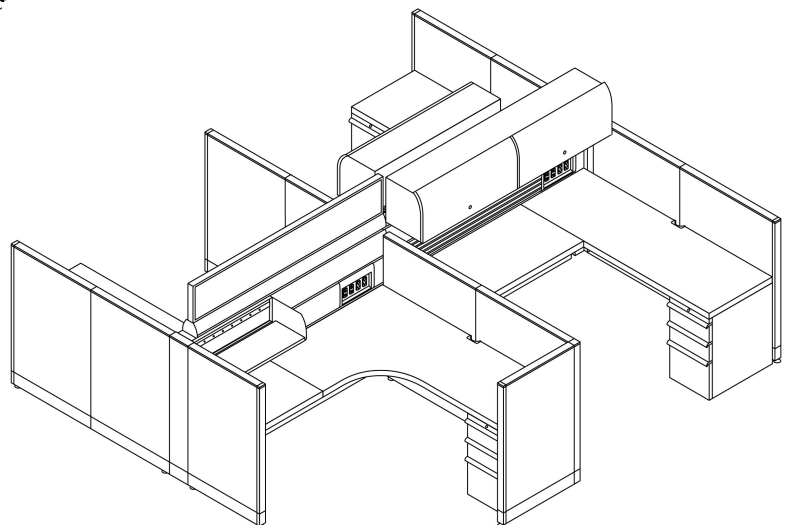
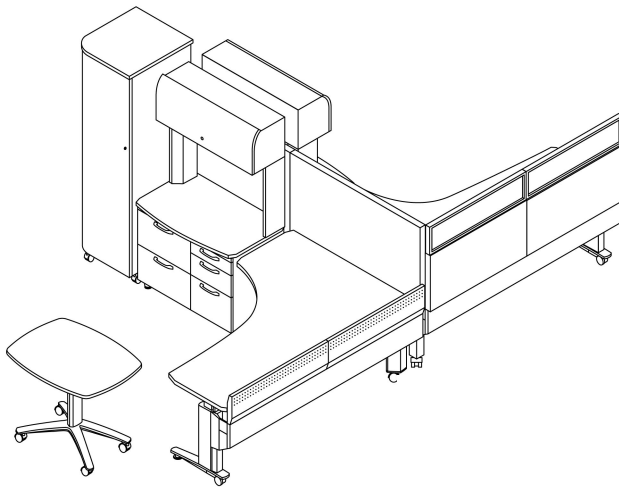
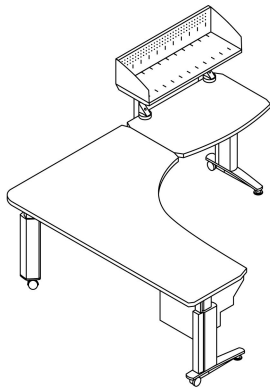
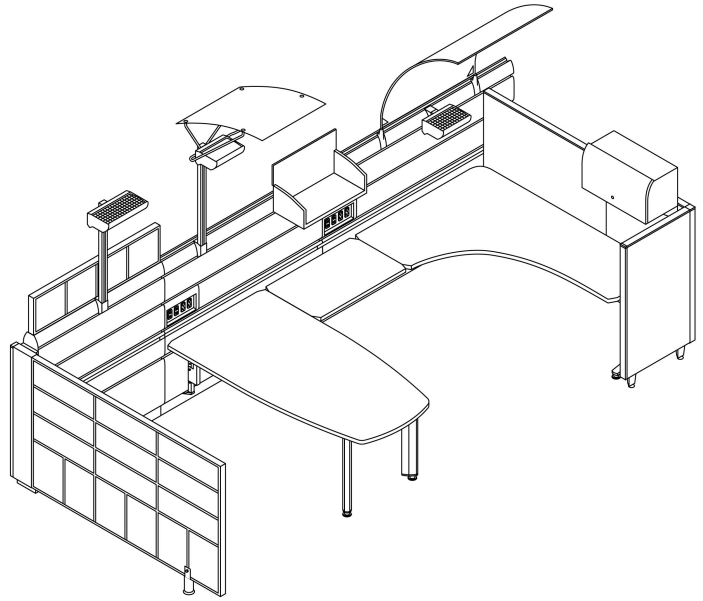


Introduction	Introduction to Currents	3
	Currents Textiles	6
	Currents Color Program	7
	Currents Legacy Finishes	8
	Introduction to Upstart	9
	Original Upstart Planning Examples	10
	Upstart Color Program	12
	Upstart Legacy Finishes	13
Service walls and components	Service wall frames	14
	Fence frames	15
	Crown and raceway covers	16
	Structural base cover kits	17
	Access covers	19
	Wall ends and connectors	26
	Wall frame accessories	32
	Spine ends and connectors	34
	End Starters	36
	Panel system starters and T-ends	37
	Power, data and communications components for service walls	45
Screens and add-up panels	Linkable screens	53
	Wall-connected screens	60
	Mobile screens	61
	Add-up panels	62
	Add up glass panels, for spine	65
	Add-up panel connectors and fillers	66
	Stackable add-up panels	68
	Stackable add-up connectors and fillers	72
Worksurfaces	Worksurfaces, universal	77
	Currents worksurfaces for Morrison panels and linkable screens	83
	Cascade edge worksurfaces	89
	Worksurface supports	96
Floorstanding storage	Pedestals	98
	Pedestal accessories	100
	Vertical storage cabinets	103
Service wall-mounted storage and lighting	Reuter overhead cabinet	105
	Reuter open overhead	106
	Reuter open shelf	107
	Reuter ganging bracket	108
	Overhead brackets	109
	T5 Task Light for Reuter Overhead Storage	110
	Portable shelf and counter surface	111
	Ambient lighting and awning	112
Desk, credenzas and worktables	Desks	113
	Desks with service beam	121
	Basic credenzas	129
	Credenzas	132
	Credenzas with service beam	134
	Service beams for desks or credenzas	136
	Power, data and communications components for desks and credenzas	138
	Above-desk storage and lighting for desks and credenzas	142
	Privacy screens for desks and credenzas	143
	Desk and credenza accessories	146
	Worktables	147
	Power monument and components	150

Upstart table desks and storage	Upstart Tables	151
	Plannable Upstart Tables	155
	Accessories	164
	Upstart Privacy Screens	165
	Plannable Upstart Privacy Screens	166
	Upstart Storage	169
	Bebop Carts and Accessories	171
Alpha-Numeric Index		172
Selling Policy		179
KnollKey Lock Program		181
General Ordering Information		182

Currents creates dynamic, advanced performance work environments from coordinated, independent elements – service walls, plannable desks, mobile storage – and existing Knoll office products.

Currents workspaces may be spine-supported or freestanding, or planned in combination with conventional panel systems.



### Currents service walls

Currents service walls form the structural core and primary path of services distribution for a cluster of workstations. Currents service walls may also create borders for team workspaces, conference areas, or corridors. Service walls are 5" thick, and are available in three heights: 39" for seated visual access; 48" for seated privacy, the most versatile height for open plan areas requiring some overhead storage; and 64" for standing privacy in executive or conference areas.

Service walls are composed of frames and covers. Frames include studs on 12" centers, base raceway with levelling glides, crown and base. Frames may be specified with 1"H compact crown or 4"H standard crown. All studs have brackets to support covers at 5", 21", 30", 39", 48" and 64" above the floor. Crown and raceway covers, structural base covers from 5" to 21" above the floor, and covers above 21" must be specified separately.

Structural base covers enable perpendicular panels, worksurface supports, or outriggers to be attached at any point. Structural base covers may be painted steel, perforated, or upholstered.

Wall covers above 21" snap into wall frame brackets at 12" intervals, and are removable without tools. Covers may be painted, upholstered, acoustical/tackable upholstered, cable tray, slatwall, or marker surface.

Currents walls plan in any combination of 48", 60" or 72" widths corresponding to the total length of wall required. Add stabilizer end cabinet, outriggers, T-end and L-end panels, or 90° or 120° post connections at each end of service wall spine. Straight connectors are included with each frame kit to join frames of the same height in a straight line. High-low straight connectors are available separately. Service wall spines require outriggers or perpendicular systems panels every 8'.

Power components are specified separately. Knoll universal 2+2 or 3+3 power components may be installed in the base of the wall or at worksurface height. Base power rails accept two duplex outlets on each side of a panel at raceway height. Desk-height outlet modules accept two duplex outlets on each face above or below the worksurface. One or two modules (four duplex outlets each side) may be located in any 12" wide stud bay. Locate outlet modules and related 12"W outlet covers before specifying widths of adjacent panel covers.

The interior of the wall between 21" and the crown offers unobstructed, 1" deep, lay-in cabling on each surface. Vertical wire management and excess cord capability is unobstructed 2 1/2" x 10" between studs.

Service walls with standard 4"H crown enable upmounted shelves and overhead storage cabinets, canopy lighting and awnings at any point on one or both sides. Translucent, perforated, upholstered or frameless glass add-up panels fit into a center channel anywhere along the crown for 12", 21" or 28" of additional enclosure.

Stackable add-up panels are also available in translucent, perforated, upholstered, marker or glazed surface. First up panels are 12", 21" or 28" high; next up stacking panels are 16" high.

First up panels can be mounted on any 3" increment along service wall crown, or correspond in width to linkable screens.

### Wall mounted components

Worksurface supports, perpendicular wall-connected linkable screens, and systems panels may be connected to the Currents wall at any point. Mobile screens are also available, in translucent fiberglass or upholstered surface.

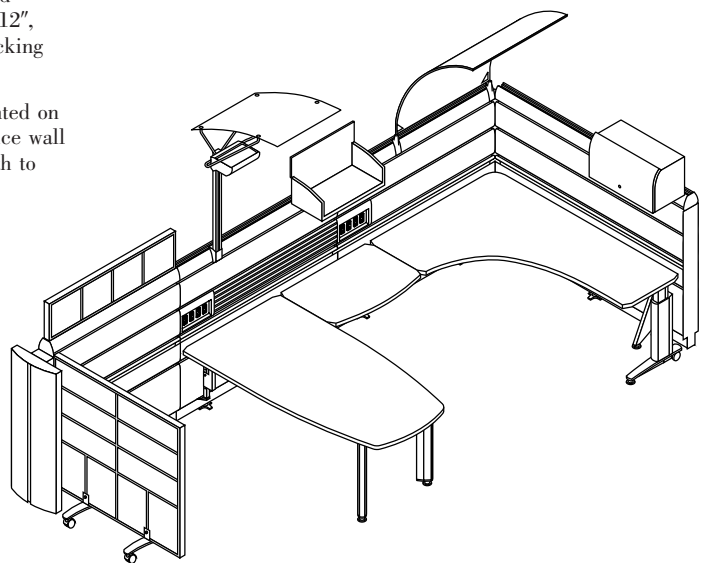
Currents linkable screens, in translucent, perforated, glazed, upholstered or marker surface, define workstations and extend the service wall horizon. Linkable screens connect in L, T, X, Y and V configurations and accept stackable add-up panels. First up panels are 16", 25" or 32"H. Next up panels are 16"H.

Currents worksurfaces are designed for computer use as the primary work activity. Deep corners are shaped for large monitors, and include wide keyboard/mouse areas. Straight worksurfaces feature softly curved or flat fronts. Extended corners incorporate an adjacent work area and a computer corner into a single, uninterrupted surface. Universal worksurfaces include a steel stiffener for high load capacity and cord management.

Service walls cantilever worksurfaces up to 24"D, or provide end support for any size worksurface. Support columns, independent C-legs, and floorstanding pedestals are also available for worksurface support. Cantilevers are adjustable in 1" increments for 24"-34"H worksurface. End support brackets and C-legs are fixed height for 28"H worksurface, or adjust for 24"-34" worksurface height.

Service wall standard height 4"H crowns can upmount portable open shelves, task and ambient lighting, add-up panels, and awnings for light control.

Service wall standard height 4"H crowns can upmount or downmount Reuter overhead storage, open shelves, or Equity overhead at any point. Reuter storage and Equity overheads can only be downmounted from walls with 1"H compact crown. Brackets are available to downmount Morrison Options, Series 2 for Morrison, Dividends, Series for Dividends or Equity overhead cabinets from 64"H service wall with either compact or standard crown.



### Currents desks and credenzas

Currents desks and credenzas are freestanding furniture elements optimized for the high-mobility, computer-based office. Currents corner desks and credenzas can work together to form efficient, two-element workstations.

They are available in basic versions for use with Currents service walls and screens, or equipped with service beams to support privacy screens, modular power distribution, and expanded data cabling. Desk and credenza beams can be linked in powered clusters. Beam-mounted privacy screens may be shared back-to-back; both sides are tackable. Upholstered screen heights reach 39" or 48" horizons. 9"H translucent windows can be added to either height. Perforated metal screens to 30"H conceal desktop cables on open desks.

All desks include horizontal and vertical cable managers. Optional service beam may be powered with Knoll 2+2 or 3+3 modular power components, and carries up to 50 lay-in Category 5 cables. Data cabling can be protected by optional data tray covers. Standard knockouts are provided at each end of the data tray for Knoll PDC Module data connector plates.

All Currents desks are height-adjustable. Pin-set version has range of 24" to 30"H in 1" increments. Handcrank version lets the user adjust continuously from 24" to 34"H. Desks have C-legs for knee clearance, and have interchangeable rear casters or glides for easy mobility.

Desks are available in corner, extended corner, and curved-front straight shapes. Worksurface corners are eased to make alignment of mobile units less critical.

Desks, credenzas, and wall-mounted worksurfaces accept clamp-on workshelves. Workshelves provide convenient binder/book access adjacent to computer displays.

Credenzas are integrated units which provide the equivalent of one or two pedestals, enclosed shelf storage, and a worksurface top that extends the usable desk top area. A cable storage area is provided at the rear of the credenza cabinet, accessed by sliding the worksurface forward. Optional linkable service beam accepts privacy screens and extends the wireway capabilities. Credenzas accept clamp-on workshelves or stanchion-mounted Reuter overhead storage units.

Stanchions can be equipped with outlet modules that link to adjacent desks.

### Currents Worktables

Currents mobile worktables extend the worksurface area and provide flexible guest/conference spaces. Rounded corners enable informal placement near other worksurfaces. All worktables are available with casters or levelling glides.

Adjustable height worktables adjust from 24" to 30" high in 1" increments.

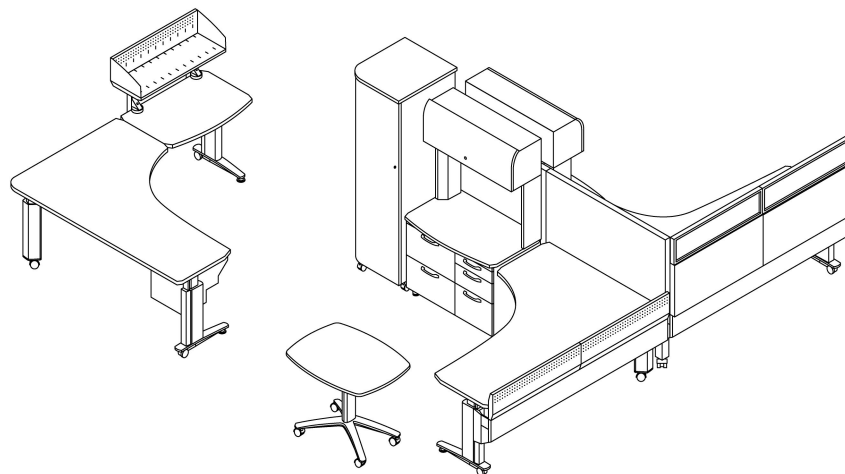
### Currents Storage

Currents freestanding storage components are designed for mobility and space efficiency.

Pedestals are available mobile or fixed, with 2 files or combination 4" personal, 7" data, and 11" file drawer fronts, fitting below standard 28" worksurface height. Data/file mobile pedestals are low enough to roll under desks set lower than 28". Mobile pedestals include top, casters and handle. Fixed pedestals include 2" levelling glides.

Reuter vertical storage has a rotating door, shelves and pull-out file frames, and a wardrobe area. Reuter storage is 21" wide so open door fits within 24" planning footprint.

Reuter vertical storage is available 48"H, with painted or worksurface top, or 64"H with painted top only.



---

**Approved for wall covers, mobile screens and privacy screens.**

*Fabric Group 10*

Bailey II (W359)  
Broadcloth (W288)  
Element (W1077)  
Foundation (W351)  
Growth Spurt (W692)  
Newbury (W812)  
Symbolic Details (W693)  
Tailor Made (W133)  
Versatility (W432)

*Fabric Group 15*

Belgrade (W256)  
Marche (W321)  
Regency/Fairfield (W210/B)

*Fabric Group 20*

Banyan (W443)  
Bauhaus Block (W296)  
Boardwalk (W911)  
Clarity (W281)  
Criss Cross (W305)  
Devon (W809)  
Frequency (W340)  
Labyrinth (W352)  
Litchfield (W808)  
Melbourne (W228)  
Outback (W229)  
Reflect (W884)  
Resolution (W280)  
Walkabout (W230)  
Weave Three (W298)

*Fabric Group 30*

Basket Draft (W249)  
Elan (W444)  
Flow (W565)  
Harmony (W232)  
Micro (W465)  
Progression (W403)  
Progression Striae (W463)  
Promenade (W913)  
Raku Cloth (W566)  
Relay (W1020)  
Walls of Rain (W923)

*Fabric Group 35*

Saxony Plus (S)

*Fabric Group 40*

Analogy (K614)  
Bardo (W284)  
Boxstep (W325)  
Eurythmic (W268)  
Foil Rap (W535)  
Freefall (W922)  
Hard Rock (W1007)  
Metaphor (K612)  
Ornament (W1078)  
Palladium (W1030)  
Sennit (W337)  
Spinoff Nuance (W319)

*Fabric Group 45*

Backdrop (W302)  
Casual Elegance (W920)  
Digital Tape (W304)  
Dristi (K872) with backing only  
Fast Forward (W301)

*Fabric Group 50*

Glo (K757)  
Ingot (K531)  
Presto (K1000)  
Ricochet (K498)

*Fabric Group 55*

Transition (W816)

Additional textiles are available on linkable screens and stackable add-up panels: see Morrison price list for approved fabrics.

Customer's Own Material is subject to an application testing fee of \$750 per fabric and a \$2500 fee for UL testing. Fabric requirements - application test, 10 yards; UL test, 15 yards. COM is also subject to extended leadtimes. COM panels are priced at Group 10 plus cost of fabric.

Please consult your Knoll representative for fabrics available for pedestal seat cushions.

# Currents Color Program

## Currents Finishes

### Core finishes

Specify Core finishes for all new customers

Core	Legacy	Wall covers	Wall ends, trim, brackets and outriggers	Storage fronts	Storage cases	Work-surfaces and shelves	Currents worksurface edges	Currents for Morrison worksurface edges	Pedestals and Reuter Overhead
611	Beige Mist Metallic	•	•	•	•				P2
118	Bright White	•	•	•	•	•		•	P3
112	Brown	•	•	•	•				P1
123	Brushed Grey					•			
122	Brushed Sand					•			
113	Dark Grey	Y3	•	•	•				P1
128	Fog					•		•	
114	Folkstone Grey	LA	•	•	•	•		•	P1
111	Jet Black		•	•	•	•		•	P1
124	Medium Cherry					•			
115	Medium Grey	Y2	•	•	•				P1
612	Medium Metallic Grey	J	•	•	•				P2
121	Micro Grey					•			
129	Micro Sand					•			
126	Natural Cherry					•			
125	Natural Maple					•			
119	Pumice	F				•		•	
116	Sandstone		•	•	•				P1
613	Silver	3	•	•	•				P3
117	Soft Grey	E/M42	•	•	•	•		•	P1
813	Trim Grey	5					•	•	
127	Walnut					•			
	Maple Techgrain®	V2			M	4			M
	Cherry Techgrain®	V2			R	6			R
	Medium brown mahogany Techgrain®	V2			I	7			I
	Medium red mahogany Techgrain®	V2			C	8			C
	American cherry Techgrain®	V2			P	9			P
	Maple	V3			K	K			K
	American cherry	V3			X	X			X
	Medium red mahogany	V3			Z	Z			Z

### Default trim information:

**Trim Grey** is the integral color for worksurface, desk, credenza and worktable top edge, mobile screens, linkable screen and add-up panel trim, privacy screen and window trim, pedestal pulls and awning brackets.

**Black:** wall frames and drawers interior, wall, screen, storage glides and casters.

**Light grey:** perforated add-up panels and ambient lights

**Translucent crystal:** fiberglass surfaces for mobile screens, linkable screens and add-up panels

The new Core finish 113 Dark Grey is not a match to the Currents Legacy finish NV. It is a match to the Dividends Legacy finish Y3.

The new Core finish 115 Medium Grey is not a match to the Currents Legacy finish NJ. It is a match to the Dividends Legacy finish Y2.

		Work-surfaces	Wall and Structural Base covers	Crown Covers	Crown end caps, connectors and connector top caps, raceway covers, worksurface brackets and outriggers	Straight legs, C-legs, corner legs, desk screen clamps, window frames (textured only)	Storage fronts	Storage Cases
Plastic Laminates	Light Grey	L						
	Pumice	F						
	Winter grey	V						
	Slate	S						
	Snow	B						
	Folkstone Grey	U						
	Pearwood	PA						
	Fiber	E						
	Sand	D						
	Medium Grey	G						
	Soft grey	M42						
Wood Grain Laminates	Clear Maple	CM						
Veneer Group 2	Maple Techgrain®	4					M	
	Cherry Techgrain®	6					R	
	Medium brown mahogany Techgrain®	7					I	
	Medium red mahogany Techgrain®	8					C	
	American cherry Techgrain®	9					P	
Veneer Group 3	Maple	K					K	
	American cherry	X					X	
	Medium red mahogany	Z					Z	
Paint Group 2	Metallic Flint *		2	2	2	2	2	2
	Light metallic grey *		U	U	U	U	U	U
	Medium metallic grey *		J	J	J	J	J	J
	Dark metallic grey *		V	V	V	V	V	V
	Light metallic tan *		W	W	W	W	W	W
	Metallic beige *		H	H	H	H	H	H
	Soft Grey *		E	E	E			
	Medium Grey (Slate) *		Y2	Y2	Y2			
	Taupe *		R	R	R			
	Aluminum			A				
Paint Group 3	Silver *		3	3	3	3	3	3
	White *		B	B	B	B	B	B

Specify legacy finishes to match existing product only. Legacy finishes are not available for new customers.

Trim grey is the integral color for worksurface, desk, credenza and worktable top edge, mobile screen and add-up panel trim, privacy screen and window trim, pedestal pulls and awning brackets

Wall, screen and storage glides, glide cones and casters are integral color Black.

Wall frames and pedestal drawer interiors are painted Black.

Perforated add-up panels and ambient lights are painted Light grey

Fiberglass surfaces for mobile screens, linkable screens and add-up panels is Translucent crystal

Linkable screen feet are painted Trim grey



Knoll Upstart is a collection of tables, screens, storage and services distribution components for computer-intensive, active, and open work environments.

Upstart plans as single-surface, L- or U-shape workstations, or freestanding worktables and storage in combination with other systems furniture. Tables are available on casters or glides and are adjustable in height.

Original Upstart tops have a plastic laminate surface with a continuous T-mold edge. The corners of Original Upstart tops are rounded. Original Upstart legs are curved.

New Plannable Upstart tops have a plastic laminate or Veneer surface with a T-mold edge on the front and a thin edgeband on the sides and back. The corners of Plannable Upstart tops are 90 degrees and allow two tables to meet at right angles. Plannable Upstart legs are straight.

Complementary products include Currents workshelves, which clamp on to Upstart tables, mobile screens, linkable screens and service wall, monitor supports and desktop accessories. Consult the Currents and KnollExtra price lists for product details and pricing.

**Screens**

Upstart screens mount to the back edge of Original Upstart tables to provide seated visual privacy at a horizon of 39 or 48 inches. Upstart Screens are available in translucent or marker surface, and may be combined with magnet rail.

Plannable Upstart tables use Morrison Network upholstered screens, which are available in a variety of sizes.

**Storage**

Storage includes the Upstart cart, for suspended filing and personal storage, and the Upstart tower, which houses binders as well as suspended files and personal storage.

**Accessories**

*Flat Bracket*

Bracket joins 2-legged table to another Upstart table at same height.

*Cable Tray*

Cable tray adds on to worksurface stiffener to control cable bundles and power strips (where permitted by code).

*Pencil Drawer*


Pencil drawer attaches to the underside of a worksurface at any location.

**Important Note: Plannable Upstart straight legs may not be used with Original Upstart tops due to stability issues.**


**Primary and Secondary Worksurfaces**

**Original Upstart**


*Rectangular table desk/Return*




*Corner table desk, 120°*



*Extended Corner table desk*




*Y-shape table desk, M-shape table desk*



**Conference Worksurfaces**

**Original Upstart**


*Round, Half round table desk*




*Oval table desk*



*Wiper table desk, Tripod table*




**48 x 24 Original Upstart**




**New Plannable Upstart**


*Rectangular table desk/Return*




*Corner table desk, 90°*



*Extended Corner table desk*




*P-shape table desk*




**New Plannable Upstart**

*Half round table desk*




**48 x 24 Plannable Upstart**




**Basic stand-alone Y desk**

- the core Upstart application
- 30" x 72" nominal shown; conference depth is approximately 36"




**Oval table with Y desk**

- 36" x 66" oval table
- 30" x 72" Y return




**Curved wiper with Y desk**

- wiper 66" W
- 30" x 72" Y return




**Y desk with 42" round table**

- conference table

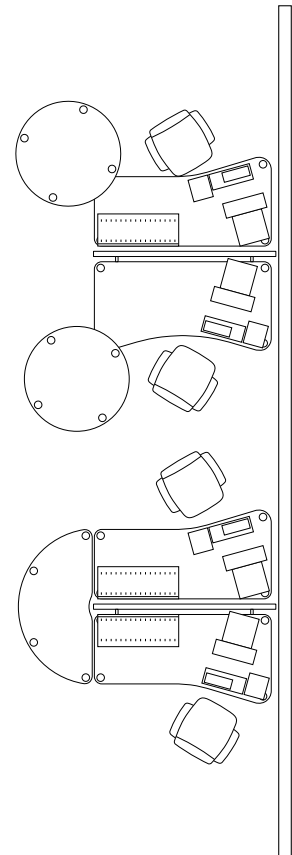


**Rectangular table with bracketed return surface**

- 72" x 76" approximate footprint
- optional work shelf




**Y and M back-to-back, with 42" conference tables**




**Y desk with tripod table**

- 30" x 72" Y desk, work shelf, and mobile pedestal




**Dual-monitor M desk workstation**

- 72" x 100" approximate footprint
- optional work shelf
- flat ends allow placement along wall



**Dual-monitor M desk with tripod table**

- 30" x 72" nominal M desk




**Y desks back-to-back, with half-round shared table**

- please note 1.75" setback from the back edge of each top to module line, same as Currents desks.


**Y desk with Upstart storage**

- 72" x 96" footprint
- 72" table with screen
- cart and tower




**Extended corner desk and tower**

- 72" x 72" footprint
- 48" and 72" screens
- cart and tower




**Extended corner desk and adjacent worktable**

- 72" x 96" footprint
- 72" x 48" corner and 48" straight desks
- cart and privacy screen




**Upstart 120° planning**

- group of three 120° corners
- 48" shared privacy screens
- carts



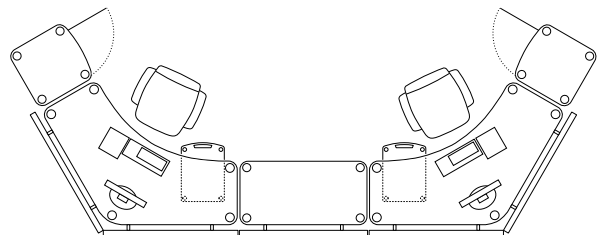
**U-shape plannable desks**

- 96" x 96" footprint
- two 48" x 72" extended corners
- cart and tower
- 72" privacy screen



**Upstart work group**

- 120° corners and shared worktable 48 x 24"
- carts and towers
- 48" privacy screens



**Core finishes**

Specify Core finishes for all new customers

Core	Legacy	Table legs, screen brackets, magnet rail	Upstart Work-surfaces	Plan-nable Upstart Work-surfaces	Upstart Work-surface edges	Plan-nable Upstart Work-surface edges	Cart	Tower top and bottom	Tower door
611	Beige Mist Metallic	•						•	•
118	Bright White	•	•	•	•	•		•	•
112	Brown	•						•	•
123	Brushed Grey		•	•					
122	Brushed Sand		•	•					
113	Dark Grey	Y3	•					•	•
128	Fog		•	•	•	•			
114	Folkstone Grey	LA	•	•	•	•		•	•
111	Jet Black		•	•	•	•		•	•
124	Medium Cherry		•	•					
115	Medium Grey	Y2	•					•	•
612	Medium Metallic Grey	J	•					•	•
121	Micro Grey		•	•					
129	Micro Sand		•	•					
126	Natural Cherry		•	•					
125	Natural Maple		•	•					
119	Pumice	F	•	•	•	•			
116	Sandstone		•					•	•
613	Silver	3	•					•	•
117	Soft Grey	E/M42	•	•	•	•		•	•
813	Trim grey	5			•	•			
127	Walnut		•	•					
	Translucent orange	O			•				
	Translucent blue	P			•				
	Frosty white	W			•				
	Light grey (integral)	U					•		
	Glider grey (integral)	G1					•		
	Maple Techgrain®	V2		•					M
	Cherry Techgrain®	V2		•					R
	Med. brown mahogany Techgrain®	V2		•					I
	Med. red mahogany Techgrain®	V2		•					C
	American cherry Techgrain®	V2		•					P
	Maple	V3							K
	American cherry	V3							X
	Medium red mahogany	V3							Z

**Default trim information:**

**Trim Grey** is the integral color for caster and glide leg levellers and screen corners

**Black:** flat bracket, cable tray and casters

**Light grey:** Cart pencil tray and divider

**Natural anodized aluminum:** Cart legs and Tower posts

Screen available in Ribbed Polycarbonate or Marker surface

For Plannable Upstart Veneer Group 2, only black or trim grey edgebands can be specified.

Translucent orange, Translucent blue, and Frosty white edgebands are not available for Plannable Upstart tables.

Specify Legacy Finishes for existing customers only. Legacy Finishes are not available for new customers.

		Table legs, screen brackets, magnet rail	Work- surfaces and shelves	Work- surface edges	Cart	Tower top and bottom	Tower door
B	Snow		•				
L	Light grey		•	•			
E	Fiber		•				
V	Winter grey		•				
S	Slate		•				
F	Pumice		•	•			
U	Folkstone grey		•	•			
M42	Soft grey		•	•			
D	Sand		•	•			
CM	Clear Maple		•				
PA	Pearwood		•				
WM	Warm Cherry		•				
5	Trim grey			•			
N	Black			•			
O	Translucent orange			•			
P	Translucent blue			•			
W	Frosty white			•			
N2	Flint					•	•
NU	Light grey					•	•
NJ	Medium grey					•	•
NV	Dark grey					•	•
NW	Light Tan					•	•
NH	Beige					•	•
3	Silver	•				•	•
B	White	•				•	•
2	Metallic flint	•					
U	Light metallic grey	•					
J	Medium metallic grey	•					
V	Dark metallic grey	•					
H	Metallic beige	•					
W	Light metallic tan	•					
E	Soft grey	•					
M	Maple Techgrain®						•
R	Cherry Techgrain®						•
C	Med. red mahogany Techgrain®						•
P	American cherry Techgrain®						•
K	Maple						•
X	American cherry						•
Z	Medium red mahogany						•
U	Light grey (integral)				•		
G1	Glider grey (integral)				•		

**Default trim information:**

**Trim Grey** is the integral color for caster and glide leg levellers and screen corners

**Black:** flat bracket, cable tray and casters



**Light grey:** Cart pencil tray and divider

**Natural anodized aluminum:** Cart legs and Tower posts




Screen available in Ribbed Polycarbonate or Marker surface

For Plannable Upstart Veneer Group 2, only black or trim grey edgebands can be specified.

Translucent orange, Translucent blue, and Frosty white edgebands are not available for Plannable Upstart tables.

description	type	w	d	h	pattern no.	black
	39"H	48"	5"	43"	<b>APF1 3948</b>	\$422.
		60"	5"	43"	<b>APF1 3960</b>	486.
		72"	5"	43"	<b>APF1 3972</b>	602.
	48"H	48"	5"	52"	<b>APF1 4848</b>	465.
		60"	5"	52"	<b>APF1 4860</b>	532.
		72"	5"	52"	<b>APF1 4872</b>	664.
	64"H	48"	5"	68"	<b>APF1 6448</b>	554.
		60"	5"	68"	<b>APF1 6460</b>	633.
		72"	5"	68"	<b>APF1 6472</b>	793.
	39"H	48"	5"	40"	<b>APFA1 3948</b>	338.
		60"	5"	40"	<b>APFA1 3960</b>	389.
		72"	5"	40"	<b>APFA1 3972</b>	480.
	48"H	48"	5"	49"	<b>APFA1 4848</b>	371.
		60"	5"	49"	<b>APFA1 4860</b>	425.
		72"	5"	49"	<b>APFA1 4872</b>	531.
	64"H	48"	5"	65"	<b>APFA1 6448</b>	444.
		60"	5"	65"	<b>APFA1 6460</b>	506.
		72"	5"	65"	<b>APFA1 6472</b>	633.

Order Code	Specification Information	Application Notes
Example: <b>APF1 4860</b>	Wall frame pattern numbers begin with APF prefix.	Service wall frames are the structural component of a Currents spine. Specify frames in any combination of widths to create the overall wall length required.
<b>APF1</b> Wall frame		Crown is bored to accept stackable add-up panels at 3" increments.
<b>48</b> Height	<i>Specify:</i> <i>Fifth position: height</i>	Wall frames include two levelling feet with 2" travel, 12" from each side edge.
<b>60</b> Width	39 39"H 48 48"H 64 64"H	The base of the wall accepts Knoll 2 + 2 or 3 + 3 raceway power rails, and allows cables to enter or exit anywhere between glides.
	<i>Seventh position: width</i>	Specify crown covers, raceway covers, structural base covers, and wall covers for each face of frame, and specify power components separately.
	48 48"W 60 60"W 72 72"W	Frames include vertical studs every 12" on center, with cover mounting clips and cable manager inserts on both sides. Frames also include 4"H or 1" top crown with continuous channel for add-up panels. Standard crown frames include shaped crowns for upmounting shelves and overhead storage cabinets, canopy lighting, or awnings at any point. Compact crown frames feature a slim profile crown with downmounting capability only.
	All wall frames include 3" diameter, 2" levelling glides and one set of connectors to adjacent frame or wall connector. Frames are black painted finish.	

description	width	depth	height	pattern number	black
Fence frames (legs not included) 	48"	5"	20 1/2"	<b>APF 1848</b>	\$411.
	60"	5"	20 1/2"	<b>APF 1860</b>	491.
	72"	5"	20 1/2"	<b>APF 1872</b>	590.
Leg with glide 	2 3/4"	4"	18 1/2"	<b>AX1 LEG ( )</b>	63.
Stabilizer feet (set of 2) 	2 1/2"	7 1/2"	4 1/2"	<b>AX1 FF ( )</b>	94.

**Order Code**

Example: <b>APF 1872</b>	
<b>APF</b>	Wall frame
<b>18</b>	Height
<b>72</b>	Width

**Specification Information**

*Specify painted finishes for legs and feet.*

Fence frames include four barrel connectors, crown and bottom rail covers in trim grey. Frames must be enclosed with two rows of 9"H Currents wall covers on each face.

Specify Currents power components separately. Outlet modules mount at any point along the top row only.

**Application Notes**

Currents Fence provides independent services distribution to a cluster of tables, desks or workstations.

Installed Fence frames are 40"H and include vertical studs with cover mounting clips and cable manager inserts every 12".





A continuous top channel accepts Currents crown top caps and supports panes, add up panels or stackable add up panels 12" high. 21"H stackable add up panels may be used on Fence runs supported by perpendicular panels or linkable screens.

Fence legs with glides mount 12" from each frame side edge under the first full vertical stud. Stabilizer feet mount on both faces of Fence legs.

For freestanding Fence runs, specify a leg with feet 12" from each run end plus a leg with feet for each intermediate frame connection. Intermediate legs may be positioned on either side of the frame connection.

Legs with feet 12" from each end of connected Fence frames can be replaced by stabilizer end cabinets or T-ends with panels or linkable screens. Intermediate support may also be provided by legs without feet in combination with perpendicular panels or linkable screens with Fence panel starters.

Fence frames can end support worksurfaces but cannot cantilever worksurfaces or upmounted storage.

description	type	w	d	h	pattern no.	paint	metal finish (A)	list
Crown covers (pair) 		48"	5"	4"	<b>APT 48 ( )</b>	\$28.	\$34.	
		60"	5"	4"	<b>APT 60 ( )</b>	34.	38.	
		72"	5"	4"	<b>APT 72 ( )</b>	38.	46.	
Crown covers, compact (pair) integral color 		48"	5"	1"	<b>APTA 48 ( )</b>			44.
		60"	5"	1"	<b>APTA 60 ( )</b>			52.
		72"	5"	1"	<b>APTA 72 ( )</b>			89.
Raceway covers (pair) 	no outlets	48"	–	2 1/2"	<b>APR 480 ( )</b>	28.		
		60"	–	2 1/2"	<b>APR 600 ( )</b>	34.		
		72"	–	2 1/2"	<b>APR 720 ( )</b>	38.		
	outlets	48"	–	2 1/2"	<b>APR 48 ( )( )</b>	34.		
		60"	–	2 1/2"	<b>APR 60 ( )( )</b>	38.		
		72"	–	2 1/2"	<b>APR 72 ( )( )</b>	46.		
Crown top cap 		24"	2"	–	<b>APT C24 ( )</b>			8.
		24"	2"	–	<b>APT1 C24 ( )</b>			8.
		36"	2"	–	<b>APT C36 ( )</b>			13.
		36"	2"	–	<b>APT1 C36 ( )</b>			13.
		48"	2"	–	<b>APT C48 ( )</b>			21.
		48"	2"	–	<b>APT1 C48 ( )</b>			21.
		60"	2"	–	<b>APT C60 ( )</b>			24.
		60"	2"	–	<b>APT1 C60 ( )</b>			24.
		72"	2"	–	<b>APT C72 ( )</b>			28.
	72"	2"	–	<b>APT1 C72 ( )</b>			28.	


integral color only, plastic

Order Code	Specification Information	Application Notes
Example: <b>APR 480 612</b> <b>APR</b> Raceway <b>48</b> Width <b>0</b> Outlet openings <b>612</b> Finish	Wall crown pattern numbers begin with APT-prefix, then frame width. Specify: Sixth position: paint or metal finish Raceway Covers begin with APR-prefix, then frame width. Specify: Sixth position: outlet openings 0 no outlets 2 two outlets, each side (48", 60" only) 4 four outlets, each side 6 six outlets (72" only), each side Seventh position: Raceway cover finish	Crown, raceway, and structural base covers are required for every wall frame in corresponding widths. Covers are specified in pairs to cover both sides of a frame. Raceway covers may be specified with no openings (desk-height raceway), two openings in the center, or four outlets at all possible locations in 48" or 60"W raceway. 72"W raceway may have four outlet openings in the center or six in all, each side. Raceway cover sets with outlet openings include black filler plates for one cover only.



# Structural base cover kits non-upholstered

description	type	w	d	h	pattern no.	smooth solid	textured solid	perforated	textured perforated
Structural base covers (pair)	non upholstered	48"	1"	16"	<b>APC AZ48 ( ) ( )</b>	\$205.	\$226.	\$290.	\$319.
		60"	1"	16"	<b>APC AZ60 ( ) ( )</b>	236.	262.	333.	368.
		72"	1"	16"	<b>APC AZ72 ( ) ( )</b>	269.	296.	376.	414.



### Order Code

Example:	<b>APC AZ48 H 612</b>
<b>APC</b>	Wall cover
<b>AZ</b>	Attachment zone
<b>48</b>	Width
<b>H</b>	Perforated
<b>612</b>	Finish

### Specification Information

Structural base cover kit pattern numbers begin with APC AZ prefix, then cover width.

*Specify:*

*Eighth position:*

- P painted
- PT textured painted
- H perforated painted
- HT textured perforated painted

*Ninth position:* paint finish or fabric group

*Specify paint finish for all covers.*

*Textured paint finishes for structural base covers only.*


### Application Notes

Crown, raceway, and structural base covers are required for every wall frame in corresponding widths. Covers are specified in pairs to cover both sides of a frame.

Structural base covers bolt to each side of the wall frame up to 21"H for structure and continuous attachment capability.

# Structural base cover kits *upholstered*

description	type	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
Structural base covers (pair)	upholstered	48"	1"	16"	<b>APC AZ48 F ( )</b>	\$294.	\$306.	\$316.	\$339.	\$347.	\$359.	\$370.	\$389.	\$412.
		60"	1"	16"	<b>APC AZ60 F ( )</b>	347.	359.	372.	397.	410.	421.	434.	456.	485.
		72"	1"	16"	<b>APC AZ72 F ( )</b>	n/a	412.	n/a	n/a	n/a	n/a	n/a	n/a	n/a



### Order Code

Example:	<b>APC AZ48 F 10</b>
<b>APC</b>	Wall cover
<b>AZ</b>	Attachment zone
<b>48</b>	Width
<b>F</b>	Upholstered
<b>10</b>	Fabric

### Specification Information

Structural base cover kit pattern numbers begin with APC AZ prefix, then cover width.

*Specify:*  
*Eighth position:*

F fabric

*Ninth position:* paint finish or fabric group

*Fabric groups:*  
Specify two-digit fabric group number

### Application Notes




Crown, raceway, and structural base covers are required for every wall frame in corresponding widths. Covers are specified in pairs to cover both sides of a frame.

Structural base covers bolt to each side of the wall frame up to 21"H for structure and continuous attachment capability.

When ordering 60" wide or greater width upholstered structural base covers, please check the width of the fabric selected.

# Access covers

## outlets cover

description	type	w	d	h	pattern no.	black	no finish	smooth
Outlets cover	9"H cover	12"	1"	9"	<b>APC OC ( )</b>			\$24.
								
Hinged outlet flap (each)					<b>APC OCF</b>			24.
Outlet fillers (Set of 10)					<b>AR OF</b>		29.	
Hardwire outlets cover		12"	9"		<b>APC HOC ( )</b>			37.
								
Hardwire outlet box, desk height	quad	2"			<b>AR1 HOB</b>			168.
	two quad	12"			<b>AR1 HOB2</b>			222.

### Order Code

Example:	<b>APC OC 612</b>
<b>APC</b>	Service wall cover
<b>OC</b>	Outlets cover
<b>612</b>	Finish

### Specification Information

*Specify finish.*

### Application Notes

Locate outlets covers on wall frames before specifying other wall covers.

Outlets cover mounts between 21" and 30" (below standard desk height), 30" - 39" (above desk height) or 39" - 48" on service wall frame.

Outlets cover is 12" wide, and mounts anywhere on wall frame between 21" and 48" above the floor. Outlets cover corresponds to power components (specified separately) mounted on wall frame.

Outlets covers have four openings for power or PDC outlets. Specify outlet fillers for unused outlet openings in cover. Specify hinged outlet flap to conceal power or data outlet plugs. Each flap covers two openings; two flaps conceal all four openings in outlets cover.

For hardwire power applications (required in City of Chicago) specify hardwire outlets cover and hardwire outlets box. Do not specify cable tray covers at same level as hardwire power.




Hardwire outlet box accepts two Decora-style duplex outlets, and includes mounting brackets for one face of wall between 21" and 48"H. Two quad hardwire outlet box accepts four duplex outlets on one face. Also specify hardwire outlets cover, which has four outlet openings. Specify outlet fillers for any unused outlet openings.

Outlet boxes include openings to permit continuous lay-in wiring with Wiremold® raceway. Electrical contractor supplies infeed cable, Wiremold 2400®, and duplex outlets. Outlet boxes can be planned back to back, with distribution on one side of service wall. Wiremold will not fit behind cable tray covers.

# Access covers

## *cable tray and slatwall covers*

Currents

description	w	d	h	pattern no.	smooth
 9"H cable tray covers	12"	1"	9"	<b>APC 0912 C ( )</b>	\$60.
	24"	1"	9"	<b>APC 0924 C ( )</b>	72.
	36"	1"	9"	<b>APC 0936 C ( )</b>	83.
	48"	1"	9"	<b>APC 0948 C ( )</b>	108.
	60"	1"	9"	<b>APC 0960 C ( )</b>	137.
	72"	1"	9"	<b>APC 0972 C ( )</b>	166.
 9"H cable tray exit cover	12"	1"	9"	<b>APC 0912 CX ( )</b>	118.
 9"H slatwall covers	12"	1"	9"	<b>APC 0912 S ( )</b>	53.
	24"	1"	9"	<b>APC 0924 S ( )</b>	61.
	36"	1"	9"	<b>APC 0936 S ( )</b>	73.
	48"	1"	9"	<b>APC 0948 S ( )</b>	94.
	60"	1"	9"	<b>APC 0960 S ( )</b>	118.
	72"	1"	9"	<b>APC 0972 S ( )</b>	144.

### Order Code

Example:	<b>APC 0948 C 612</b>
<b>APC</b>	Service wall cover
<b>09</b>	Height
<b>48</b>	Width
<b>C</b>	Surface type
<b>612</b>	Finish

### Specification Information

*Specify finish.*

### Application Notes

Cable tray and slatwall covers provide integral performance surface on one or both sides of a wall frame. Cable tray and slatwall may be planned in combination with other painted or upholstered covers to enclose frames between 21"H and 48"H.

Cable tray mounts from 21" - 30" only on any panel frame. Adjacent trays form continuous, easily accessible cable management at worksurface or table height. Shorter segments provide local cable management below outlet modules. Covers may span across a straight wall frame connection.

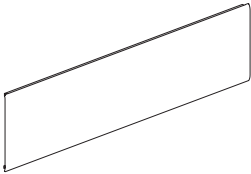
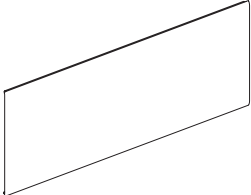
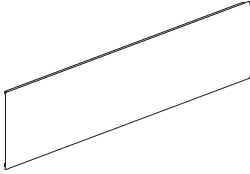
Bottom half of cable tray cover permits cables to be managed on surface of studs with one cable holder (55 CAT5 cables) or two clips (28 cables).

Cable tray exit cover permits power jumpers and data/communication cables to pass from wall to Currents desk service beam. Cable tray exit cover, 12"W only, has two openings with sliding covers.

Slatwall supports KnollExtra task lights, monitor arms, paper trays, file holders and other accessories.

# Access covers

## marker surface and painted steel covers


description	type	w	d	h	pattern no.	M	smooth	textured
9"H Marker surface covers 		24"	1	9"	<b>APC 0924 M</b>	\$35.		
		36"	1	9"	<b>APC 0936 M</b>	42.		
		48"	1	9"	<b>APC 0948 M</b>	48.		
		60"	1	9"	<b>APC 0960 M</b>	54.		
		72"	1	9"	<b>APC 0972 M</b>	59.		
16"H Marker surface covers 		48"	1	16"	<b>APC 1648 M</b>	70.		
		60"	1	16"	<b>APC 1660 M</b>	83.		
		72"	1	16"	<b>APC 1672 M</b>	94.		
9"H Painted steel covers 	smooth	12"	1"	9"	<b>APC 0912 P ( )</b>		27.	
		24"	1"	9"	<b>APC 0924 P ( )</b>		32.	
		36"	1"	9"	<b>APC 0936 P ( )</b>		36.	
		48"	1"	9"	<b>APC 0948 P ( )</b>		44.	
		60"	1"	9"	<b>APC 0960 P ( )</b>		49.	
	textured	12"	1"	9"	<b>APC 0912 PT ( )</b>			29.
		24"	1"	9"	<b>APC 0924 PT ( )</b>			35.
		36"	1"	9"	<b>APC 0936 PT ( )</b>			42.
		48"	1"	9"	<b>APC 0948 PT ( )</b>			48.
		60"	1"	9"	<b>APC 0960 PT ( )</b>			54.

Order Code	Specification Information	Application Notes
Example: <b>APC 0948 P 117</b> <b>APC</b> Service wall cover <b>09</b> Height <b>48</b> Width <b>P</b> Surface type <b>117</b> Finish	9"H covers plan at any 9"H level in 39", 48", or 64" walls.  For active face of 39"H frame, specify two 9"H covers each side.  For active face of 48"H frame, specify three 9"H covers each side.  For active face of 64"H frame, specify three 9"H covers and one 16"H cover each side.  <i>Surface type:</i> P Painted PT Textured painted M Marker  <i>Specify smooth or textured painted finish for steel covers.</i>	Marker surface covers are steel with a bright white dry-erase marker finish.  Painted steel covers provide a durable wall-like surface in smooth or textured finish.  Service wall covers enclose frames between 21"H and the top crown. Covers may be specified in any combination of widths corresponding to the total wall length. Covers may span across a straight wall frame connection.  For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slatwall surfaces.

# Access covers

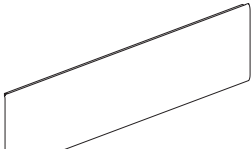
## marker surface and painted steel covers

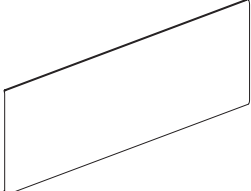
description	type	w	d	h	pattern no.	M	smooth	textured
9"H Painted steel covers	textured	72"	1"	9"	<b>APC 0972 PT ( )</b>			\$59.
16"H Painted steel covers	smooth	48"	1"	16"	<b>APC 1648 P ( )</b>		63.	
		60"	1"	16"	<b>APC 1660 P ( )</b>		77.	
		72"	1"	16"	<b>APC 1672 P ( )</b>		85.	
	textured	48"	1"	16"	<b>APC 1648 PT ( )</b>			70.
		60"	1"	16"	<b>APC 1660 PT ( )</b>			83.
		72"	1"	16"	<b>APC 1672 PT ( )</b>			94.



Order Code	Specification Information	Application Notes
Example: <b>APC 0948 P 117</b>	9"H covers plan at any 9"H level in 39", 48", or 64" walls.	Marker surface covers are steel with a bright white dry-erase marker finish.
<b>APC</b> Service wall cover		
<b>09</b> Height	For active face of 39"H frame, specify two 9"H covers each side.	Painted steel covers provide a durable wall-like surface in smooth or textured finish.
<b>48</b> Width		
<b>P</b> Surface type	For active face of 48"H frame, specify three 9"H covers each side.	Service wall covers enclose frames between 21"H and the top crown. Covers may be specified in any combination of widths corresponding to the total wall length. Covers may span across a straight wall frame connection.
<b>117</b> Finish	For active face of 64"H frame, specify three 9"H covers and one 16"H cover each side.	
	<p><i>Surface type:</i></p> <p>P Painted  PT Textured painted  M Marker</p> <p><i>Specify smooth or textured painted finish for steel covers.</i></p>	For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slatwall surfaces.

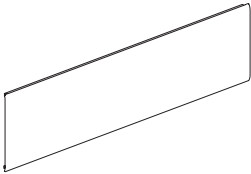
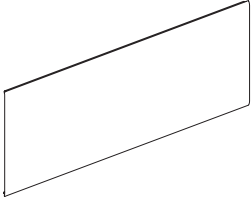
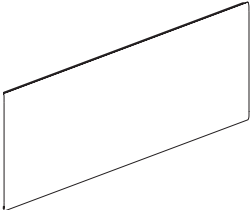
# Access covers upholstered

description	w	d	h	pattern no.	10	15	20	30	40	45	50	55
 9"H Wall covers	12"	1"	9"	<b>APC 0912 F ( )</b>	\$52.	\$52.	\$55.	\$58.	\$59.	\$60.	\$61.	\$65.
	24"	1"	9"	<b>APC 0924 F ( )</b>	64.	65.	68.	72.	75.	78.	82.	86.
	36"	1"	9"	<b>APC 0936 F ( )</b>	78.	81.	82.	87.	93.	95.	100.	109.
	48"	1"	9"	<b>APC 0948 F ( )</b>	85.	87.	92.	100.	107.	110.	114.	121.
	60"	1"	9"	<b>APC 0960 F ( )</b>	101.	107.	111.	119.	129.	134.	141.	148.
	72"	1"	9"	<b>APC 0972 F ( )</b>	n/a	120.	n/a	n/a	n/a	n/a	n/a	n/a

 16"H Wall covers	36"	1"	16"	<b>APC 1636 F ( )</b>	114.	119.	122.	132.	141.	144.	149.	158.
	48"	1"	16"	<b>APC 1648 F ( )</b>	126.	134.	140.	149.	158.	165.	173.	183.
	60"	1"	16"	<b>APC 1660 F ( )</b>	152.	158.	167.	179.	191.	198.	209.	223.
	72"	1"	16"	<b>APC 1672 F ( )</b>	n/a	180.	n/a	n/a	n/a	n/a	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>APC 0948 F15</b> <b>APC</b> Service wall cover <b>09</b> Height <b>48</b> Width <b>F</b> Surface type <b>15</b> Fabric group	For active face of 39"H frame, specify two 9"H covers.  For active face of 48"H frame, specify three 9"H covers.  For active face of 64"H frame, specify three 9"H covers and one 16"H cover.  For full fabric surface between 5" and 21", order upholstered attachment zone cover.  <i>Surface type:</i> F Upholstered  <i>Specify fabric group:</i> 10 Fabric group 10 15 Fabric group 15 20 Fabric group 20 30 Fabric group 30 40 Fabric group 40 45 Fabric group 45 50 Fabric group 50 55 Fabric group 55	Upholstered service wall covers enclose frame between 21" and the top crown.  Specify widths corresponding to wall frame width, or in any 12" increment to accommodate 12"W outlets covers or slatwall covers. Covers may span across a straight wall frame connection.  For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slatwall surfaces.  When ordering 60" or wider covers, please check width of fabric specified.

# Access covers tackable upholstered

description	w	d	h	pattern no.	10	15	20	30	40	45	50	55
9"H Wall covers 	12"	1"	9"	<b>APC 0912 A ( )</b>	\$100.	\$104.	\$107.	\$112.	\$120.	\$123.	\$129.	\$138.
	24"	1"	9"	<b>APC 0924 A ( )</b>	100.	104.	107.	112.	120.	123.	129.	138.
	36"	1"	9"	<b>APC 0936 A ( )</b>	100.	104.	107.	112.	120.	123.	129.	138.
	48"	1"	9"	<b>APC 0948 A ( )</b>	109.	113.	118.	128.	137.	141.	148.	158.
	60"	1"	9"	<b>APC 0960 A ( )</b>	130.	137.	142.	154.	165.	171.	180.	192.
	72"	1"	9"	<b>APC 0972 A ( )</b>	n/a	156.	n/a	n/a	n/a	n/a	n/a	n/a
16"H Wall covers 	36"	1"	16"	<b>APC 1636 A ( )</b>	148.	154.	160.	168.	179.	184.	194.	205.
	48"	1"	16"	<b>APC 1648 A ( )</b>	164.	171.	178.	192.	205.	212.	223.	236.
	60"	1"	16"	<b>APC 1660 A ( )</b>	196.	205.	215.	232.	248.	258.	268.	288.
	72"	1"	16"	<b>APC 1672 A ( )</b>	n/a	233.	n/a	n/a	n/a	n/a	n/a	n/a
18"H Wall cover (replaces (2) 9"H) 	36"	1"	18"	<b>APC 1836 A ( )</b>	177.	182.	188.	199.	210.	216.	228.	238.
	48"	1"	18"	<b>APC 1848 A ( )</b>	222.	228.	235.	248.	262.	268.	279.	296.
	60"	1"	18"	<b>APC 1860 A ( )</b>	265.	274.	281.	298.	314.	320.	331.	347.
	72"	1"	18"	<b>APC 1872 A ( )</b>	n/a	309.	n/a	n/a	n/a	n/a	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>APC 0948 A20</b> <b>APC</b> Service wall cover <b>09</b> Height <b>48</b> Width <b>A</b> Surface type <b>20</b> Fabric group	<p>For active face of 39"H frame, specify two 9"H covers. For passive face (along corridor or wall) specify one 18" cover.</p> <p>For active face of 48"H frame, specify three 9"H covers or one 9"H and one 18"H cover. For passive face, specify 27"H cover.</p> <p>For active face of 64"H frame, specify three 9"H covers and one 16"H cover or one 9"H, one 18"H, and one 16"H cover. For passive face, specify one 27" and one 16"H cover.</p> <p>For full fabric surface between 5" and 21", order upholstered attachment zone cover.</p> <p><i>Surface type:</i> A tackable upholstered</p> <p><i>Specify fabric group:</i>            10 Fabric group 10            15 Fabric group 15            20 Fabric group 20            30 Fabric group 30            40 Fabric group 40            45 Fabric group 45            50 Fabric group 50            55 Fabric group 55</p>	<p>Tackable upholstered service wall covers enclose wall frames between 21" and the top crown. Covers incorporate a tackable, acoustical core in the same outward profile as other upholstered covers.</p> <p>Specify widths corresponding to wall frame width, or in any 12" increment to accommodate 12"W outlets covers or slatwall covers. Covers may span across a straight wall frame connection.</p> <p>For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slatwall surfaces.</p> <p>For passive wall surfaces (corridors or conference areas) specify 18"H or 27"H covers in place of two or three 9"H covers.</p> <p>18"H covers may also be specified above 9"H covers including outlets covers below desk height on 48" or 64"H service walls.</p> <p>Service wall with upholstered tackable covers has been tested to NRC .40 and STC 22.</p> <p>When ordering 60" or wider covers, please check width of fabric specified.</p>



# Access covers

## tackable upholstered






description	w	d	h	pattern no.	10	15	20	30	40	45	50	55
27"H Wall cover (replaces (3) 9"H)	36"	1"	27"	<b>APC 2736 A ( )</b>	\$265.	\$274.	\$281.	\$298.	\$314.	\$320.	\$331.	\$347.
	48"	1"	27"	<b>APC 2748 A ( )</b>	333.	342.	349.	370.	387.	397.	411.	427.
	60"	1"	27"	<b>APC 2760 A ( )</b>	401.	411.	414.	441.	461.	471.	485.	501.
	72"	1"	27"	<b>APC 2772 A ( )</b>	n/a	466.	n/a	n/a	n/a	n/a	n/a	n/a

Order Code	Specification Information	Application Notes
<p>Example: <b>APC 0948 A20</b></p> <p><b>APC</b> Service wall cover</p> <p><b>09</b> Height</p> <p><b>48</b> Width</p> <p><b>A</b> Surface type</p> <p><b>20</b> Fabric group</p>	<p>For active face of 39"H frame, specify two 9"H covers. For passive face (along corridor or wall) specify one 18" cover.</p> <p>For active face of 48"H frame, specify three 9"H covers or one 9"H and one 18"H cover. For passive face, specify 27"H cover.</p> <p>For active face of 64"H frame, specify three 9"H covers and one 16"H cover or one 9"H, one 18"H, and one 16"H cover. For passive face, specify one 27" and one 16"H cover.</p> <p>For full fabric surface between 5" and 21", order upholstered attachment zone cover.</p> <p><i>Surface type:</i> A tackable upholstered</p> <p><i>Specify fabric group:</i> 10 Fabric group 10 15 Fabric group 15 20 Fabric group 20 30 Fabric group 30 40 Fabric group 40 45 Fabric group 45 50 Fabric group 50 55 Fabric group 55</p>	<p>Tackable upholstered service wall covers enclose wall frames between 21" and the top crown. Covers incorporate a tackable, acoustical core in the same outward profile as other upholstered covers.</p> <p>Specify widths corresponding to wall frame width, or in any 12" increment to accommodate 12"W outlets covers or slatwall covers. Covers may span across a straight wall frame connection.</p> <p>For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slatwall surfaces.</p> <p>For passive wall surfaces (corridors or conference areas) specify 18"H or 27"H covers in place of two or three 9"H covers.</p> <p>18"H covers may also be specified above 9"H covers including outlets covers below desk height on 48" or 64"H service walls.</p> <p>Service wall with upholstered tackable covers has been tested to NRC .40 and STC 22.</p> <p>When ordering 60" or wider covers, please check width of fabric specified.</p>

# Wall ends and connectors

## 90° and 120° connectors

Currents

description	w	d	h	pattern no.	paint
 L connector, 90°	6"	6"	39"	<b>AX1 L39 ( )( )</b>	\$279.
	6"	6"	48"	<b>AX1 L48 ( )( )</b>	334.
	6"	6"	64"	<b>AX1 L64 ( )( )</b>	391.
 T connector, 90°	6"	7"	39"	<b>AX1 T39 ( )( )</b>	279.
	6"	7"	48"	<b>AX1 T48 ( )( )</b>	334.
	6"	7"	64"	<b>AX1 T64 ( )( )</b>	391.
 X connector, 90°	7"	7"	39"	<b>AX1 X39 ( )</b>	279.
	7"	7"	48"	<b>AX1 X48 ( )</b>	305.
	7"	7"	64"	<b>AX1 X64 ( )</b>	334.
 V connector, 120°	5 1/2"	5 1/2"	39"	<b>AX1 V39 ( )( )</b>	279.
	5 1/2"	5 1/2"	48"	<b>AX1 V48 ( )( )</b>	334.
	5 1/2"	5 1/2"	64"	<b>AX1 V64 ( )( )</b>	391.
 Y connector, 120°	6 1/2"	5 1/2"	39"	<b>AX1 Y39 ( )( )</b>	279.
	6 1/2"	5 1/2"	48"	<b>AX1 Y48 ( )( )</b>	334.
	6 1/2"	5 1/2"	64"	<b>AX1 Y64 ( )( )</b>	391.

### Order Code

Example:	<b>AX1 L39 612 612</b>
<b>AX1</b>	Currents connector
<b>L</b>	Type
<b>39</b>	Height
<b>612</b>	Trim/raceway cover finish
<b>612</b>	Top/end cap finish

### Specification Information

For L, T, V, Y connectors specify:

*Seventh position:*  
painted finish for vertical trim cover and raceway cover

*Eighth position, and X connectors:*  
painted finish for top cap and crown end caps

*Specify painted finishes for connector trim covers and crown end caps.*



When ordering connectors for the spine frame with compact crown, specify compact crown end caps separately.

### Application Notes

L, T, and X connectors join Currents frames at 90° angles and include vertical trim covers, top cap and standard crown end caps, and one spare set of straight connectors.

V and Y connectors join Currents frames at 120° angles and include vertical trim covers, top cap and standard crown end cap.

# Wall ends and connectors other ends and connectors



description	type	w	d	h	pattern no.	paint	list price
 Outrigger	deep	3"	15"	21"	<b>AA1ORD ( )</b>	\$144.	
	standard	3"	8"	21"	<b>AA1OR ( )</b>	104.	
 Stabilizer end cabinet	no lock	6 - 8"	19"	39"	<b>AX1 STC39 3 ( )( )</b>	1,241.	
		6 - 8"	19"	48"	<b>AX1 STC48 3 ( )( )</b>	1,345.	
		6 - 8"	19"	64"	<b>AX1 STC64 3 ( )( )</b>	1,550.	
	with lock	6 - 8"	19"	39"	<b>AX1 STC39 L3 ( )( )</b>	1,398.	
		6 - 8"	19"	48"	<b>AX1 STC48 L3 ( )( )</b>	1,500.	
		6 - 8"	19"	64"	<b>AX1 STC64 L3 ( )( )</b>	1,707.	
High low straight connector	48 - 39"	–	5"	48"	<b>AX1 HLS4839 ( )( )</b>	150.	
	64 - 39"	–	5"	64"	<b>AX1 HLS6439 ( )( )</b>	258.	
	64 - 48"	–	5"	64"	<b>AX1 HLS6448 ( )( )</b>	173.	
Service wall starter	39"	1"	2"	39"	<b>AX1 SWS39 ( )</b>	86.	
	48"	1"	2"	48"	<b>AX1 SWS48 ( )</b>	96.	
	64"	1"	2"	64"	<b>AX1 SWS64 ( )</b>	109.	
Straight connector kit (replacement)		–	–	–	<b>AX1 S</b>	17.	

Order Code	Specification Information	Application Notes
Example: <b>AX1 HLS4839 612 612</b> <b>AX1</b> Currents connector <b>HLS</b> Type <b>4839</b> Height <b>612</b> Vertical cover finish <b>612</b> Crown end finish	For stabilizer end specify:  <i>Tenth position:</i> cabinet finish  <i>Eleventh position:</i> top cap finish  <i>Specify painted finishes for outrigger, stabilizer end cabinet, top and standard crown end caps.</i>  <i>For flat ends specify:</i>  <i>Seventh position:</i> painted finish for outside trim cover and raceway cover  <i>Eighth position:</i> painted finish for crown end cap  When specifying a flat end for a frame with the 1 inch compact crown, compact crown end caps must be ordered separately.  <i>Specify painted finish for standard crown end cap.</i>  Specify trim grey or easy grey integral color for compact crown end cap. Standard crown end caps are included with all Currents connectors except Equity end trim kits.	Outrigger connects to structural base cover at any point. Outriggers (or perpendicular systems panels) are required every 8' and adjacent to flat end for adequate support. Specify deep outriggers when cantilevering 24"D worksurfaces without adjacent perpendicular systems panels or Currents service wall connectors.  Standard outrigger should be specified when desks or credenzas with service beam are positioned along service wall.  Stabilizer end cabinet supports one end of Currents service wall spine. Hinged cover panels in cabinet open for access to data/telecom consolidation point and cable storage. Stabilizer end cabinet with lock has recessed KnollKey lock in finger pull reveal.  Stabilizer end cabinet expands the end of the Currents spine 3 1/2" to accommodate intermediate panel divisions between workstations. In the 3 1/2" x 5" space above this extension a ceiling infeed panel may be added. Inside back corner covers may be removed for unobstructed access to cabinet and wall frame surface.  High-low straight connectors join service wall of different heights in a straight line.  Service wall starter connects service wall to building wall.  Straight connector is replacement hardware kit to join Currents wall frames of the same height end to end. Kit includes four barrel-shape connectors and hardware.  Flat end finishes end of corresponding height spine when end of wall is supported by outriggers.

# Wall ends and connectors

## *other ends and connectors*

Currents

description	type	w	d	h	pattern no.	paint	list price
 Flat end		–	5"	39"	<b>AX1 F39 ( ) ( )</b>	\$88.	
		–	5"	48"	<b>AX1 F48 ( ) ( )</b>	101.	
		–	5"	64"	<b>AX1 F64 ( ) ( )</b>	112.	
Crown end cap					<b>APT ( )</b>	5.	
 Crown end cap compact	Kit of 1				<b>APTA CC1 ( )</b>		11.
	Kit of 10				<b>APTA CC ( )</b>		93.

Order Code	Specification Information	Application Notes
Example: <b>AX1 HLS4839 612 612</b> <b>AX1</b> Currents connector <b>HLS</b> Type <b>4839</b> Height <b>612</b> Vertical cover finish <b>612</b> Crown end finish	For stabilizer end specify:  <i>Tenth position:</i> cabinet finish  <i>Eleventh position:</i> top cap finish  <i>Specify painted finishes for outrigger, stabilizer end cabinet, top and standard crown end caps.</i>  <i>For flat ends specify:</i>  <i>Seventh position:</i> painted finish for outside trim cover and raceway cover  <i>Eighth position:</i> painted finish for crown end cap  When specifying a flat end for a frame with the 1 inch compact crown, compact crown end caps must be ordered separately.  <i>Specify painted finish for standard crown end cap.</i>  Specify trim grey or easy grey integral color for compact crown end cap. Standard crown end caps are included with all Currents connectors except Equity end trim kits.	Outrigger connects to structural base cover at any point. Outriggers (or perpendicular systems panels) are required every 8' and adjacent to flat end for adequate support. Specify deep outriggers when cantilevering 24"D worksurfaces without adjacent perpendicular systems panels or Currents service wall connectors.  Standard outrigger should be specified when desks or credenzas with service beam are positioned along service wall.  Stabilizer end cabinet supports one end of Currents service wall spine. Hinged cover panels in cabinet open for access to data/telecom consolidation point and cable storage. Stabilizer end cabinet with lock has recessed KnollKey lock in finger pull reveal.

Stabilizer end cabinet expands the end of the Currents spine 3 1/2" to accommodate intermediate panel divisions between workstations. In the 3 1/2" x 5" space above this extension a ceiling infeed panel may be added. Inside back corner covers may be removed for unobstructed access to cabinet and wall frame surface.

High-low straight connectors join service wall of different heights in a straight line.

Service wall starter connects service wall to building wall.

Straight connector is replacement hardware kit to join Currents wall frames of the same height end to end. Kit includes four barrel-shape connectors and hardware.

Flat end finishes end of corresponding height spine when end of wall is supported by outriggers.

# Wall ends and connectors

## *fence ends and connectors*

### *connectors*

Currents

Service walls and components

description	w	d	h	pattern no.	list price
L connector, 90 degrees 	6"	6"	19"	<b>AX1 L18 ( )</b>	\$307.
T connector, 90 degrees 	6"	7"	19"	<b>AX1 T18 ( )</b>	313.
X connector, 90 degrees 	7"	7"	19"	<b>AX1 X18</b>	258.
V connector, 120 degrees 	5 1/2"	5 1/2"	19"	<b>AX1 V18 ( )</b>	280.
Y connector, 120 degrees 	6 1/2"	5 1/2"	19"	<b>AX1 Y18 ( )</b>	130.

#### Order Code

Example:	<b>AX1 L 18 613</b>
<b>AX1</b>	Fence connector
<b>L</b>	Type
<b>18</b>	Height
<b>613</b>	Trim finish

#### Specification Notes

*Specify painted finishes for connector trim covers.*

For L, T, V and Y connectors specify finish for vertical trim.

All top caps and crown covers are trim grey. Specify finish for outside trim of flat end.

#### Application Notes

L, T and X connectors join frames at 90° angles and include vertical trim covers, top cap and crown end caps and one set of straight connectors.

Y and V connectors join frames at 120° angles.

Flat end finishes end of Fence frames and includes crown end detail.

Wall ends and connectors  
*fence ends and connectors*  
*connectors*

Currents

description	w	d	h	pattern no.	list price
Flat end	-	5"	19"	<b>AX1 F18 ( )</b>	\$117.



**Order Code**

Example: <b>AX1 L 18 613</b>
<b>AX1</b> Fence connector
<b>L</b> Type
<b>18</b> Height
<b>613</b> Trim finish

**Specification Notes**

*Specify painted finishes for connector trim covers.*

For L, T, V and Y connectors specify finish for vertical trim.

All top caps and crown covers are trim grey. Specify finish for outside trim of flat end.

**Application Notes**

L, T and X connectors join frames at 90° angles and include vertical trim covers, top cap and crown end caps and one set of straight connectors.







Y and V connectors join frames at 120° angles.

Flat end finishes end of Fence frames and includes crown end detail.

Wall ends and connectors  
*fence ends and connectors*  
*other hardware*

Currents

Service walls and  
 components

description	type	w	d	h	pattern no.	list price
T-end adapter 	0" or 1 1/8" extension	1 3/8"	2 1/8"	2 3/8"	<b>AX1 AK1 ( )</b>	\$17.
						
T-end and stabilizer end cabinet adapter 	3 1/2" extension	4"	5"	16 1/2"	<b>AX1 AK3 ( )</b>	66.
						
Flat wall starter 	48"H service wall		3 1/4"	27"	<b>AX1 FWS 48</b>	56.
	64"H service wall		3 1/4"	43"	<b>AX1 FWS 64</b>	61.
	Fence and 39"H wall		3 1/4"	18"	<b>AX1 FWS 39</b>	50.
High-low straight connector 	48"H wall - Fence				<b>AX1 FHLS4818 ( )</b>	334.

**Order Code**

Example: <b>AX1 FWS 39</b>	
<b>AX1</b>	Fence end
<b>FWS</b>	Type
<b>39</b>	Height

**Specification Information**

*Specify painted finishes for T-end adapter kits.*  
 Flat wall starter is black only.  
 Crown end covers are trim grey.

**Application Notes**

Fence accepts Currents T-ends for 39" service wall and 39"H stabilizer end cabinet.  
 High-low fence connector joins fence and 48"H Currents service wall.  
 Specify AX1 AK1 adapter kit to complete bottom trim and crown end of T-ends with 0" or 1 1/8" extension.  
 Specify AX1 AK3 adapter kit to complete bottom trim and crown end of T-ends with 3" extension and 39"H stabilizer end cabinet.  
 Flat wall starter connects Fence frames and Currents service wall to building wall.

# Wall frame accessories

## *wall frame*

Currents

description	type	w	d	h	pattern no.	list price
Acoustical inserts	39"H	12"	2"	34"	<b>APA 39</b>	\$23.
	48"H	12"	2"	43"	<b>APA 48</b>	27.
	64"H	12"	2"	59"	<b>APA 64</b>	37.

### Order Code

### Specification Information

### Application Notes

Example: **APT 612**

**APT** Service wall trim

**612** Painted finish

Acoustical inserts fit between studs in service wall frame to increase control of sound transmission. Inserts are bagged in heights corresponding to wall frame. Specify four inserts for 48"W frame, five for 60"W frame, and six for 72"W frame. Service walls with acoustical inserts have been tested to STC 33.




# Wall frame accessories

## *fence frame*

Currents

Service walls and  
components

description	type	w	d	h	pattern no.	list price
Wire manager cover (set of 2)		3 1/2"	3"	18 3/8"	<b>AR1 VCM</b>	\$51.
						
Carpet grips (set of 10)					<b>AA1CG</b>	12.
Non-skid pads (set of 10)					<b>AA1NSK</b>	29.
Hardwire fence infeed (NYC)	2 + 2				<b>AR1 EPHF</b>	396.
	3 + 3				<b>AR1 TPHF</b>	421.

### Order Code

Example	<b>AR1 VCM</b>
<b>AR1</b>	Raceway
<b>VCM</b>	Type

### Specification Information

Wire manager covers are integral color trim grey.


### Application Notes


Wire manager covers snap into the sides of the fence legs to guide cables from the floor to the underside of the frame.

Carpet grips and/or non-skid pads snap onto bottom of stabilizer feet to prevent legs from sliding.

Hardwire fence infeed is approved for City of New York installation. Infeed includes wire manager cover, junction box and connector to desk height outlet module.

*Spine end connectors for linkable screens and Morrison panels*


description	application	h	w	d	pattern no.	list
	39" h spine	39"	5"	1/2"	<b>AX1SEC3939 ( ) ( ) ( )</b>	\$204.
	48" h spine	48"	5"	1/2"	<b>AX1SEC4848 ( ) ( ) ( )</b>	214.
	64" h spine	64"	5"	1/2"	<b>AX1SEC6464 ( ) ( ) ( )</b>	255.

	39" h spine	43"	5"	1/2"	<b>AX1SEC4339 C ( ) ( )</b>	204.
	48" h spine	52"	5"	1/2"	<b>AX1SEC5248 C ( ) ( )</b>	214.
	64" h spine	68"	5"	1/2"	<b>AX1SEC6864 C ( ) ( )</b>	255.

Inside base trim cover for Currents raceway		4"	5"		<b>AX1SECBT ( )</b>	41.
---	--	----	----	--	---------------------	-----

Order Code	Specification Information	Application Notes																
<p>Example: <b>AX1 SEC 3939 L 613 613 812</b></p> <table border="1"> <tr> <td><b>AX1</b></td> <td>Spine connector</td> </tr> <tr> <td><b>SEC</b></td> <td>Type</td> </tr> <tr> <td><b>39</b></td> <td>Connector height</td> </tr> <tr> <td><b>39</b></td> <td>Spine height</td> </tr> <tr> <td><b>L</b></td> <td>Crown type</td> </tr> <tr> <td><b>613</b></td> <td>Crown end cap finish</td> </tr> <tr> <td><b>613</b></td> <td>Vertical cover finish</td> </tr> <tr> <td><b>812</b></td> <td>Top cap finish</td> </tr> </table>	<b>AX1</b>	Spine connector	<b>SEC</b>	Type	<b>39</b>	Connector height	<b>39</b>	Spine height	<b>L</b>	Crown type	<b>613</b>	Crown end cap finish	<b>613</b>	Vertical cover finish	<b>812</b>	Top cap finish	<p>For spine end connectors specify:</p> <p>1.Crown type                      C=Currents standard 4" h                      L=low profile flat 1"                      H=high profile flat 1 1/4"                      F=compact crown 1"</p> <p>2.Crown end cap finish</p> <p>Standard, low and high profile flat and compact crown end caps are available in all standard paint finishes and 813 Trim Grey. Compact crown end caps are also available in 812 Easy Grey. Standard and compact crown end caps are also available in 812 Easy Grey or 813 Trim Grey.</p> <p>3.Vertical cover finish:                      All standard paint finishes</p> <p>4.Top cap for vertical cover:                      812=Easy Grey                      813=Trim Grey                      And all standard paint finishes</p>	<p>Spine end connectors are complete vertical cover and top trim for the end of an AutoStrada or Currents spine. Side edges of end connectors accept end starters for linkable screens and Morrison or other panels of the same height or lower.</p> <p>Spine end connectors include painted aluminum cover with beveled top cap and crown end cap.</p> <p>Spine end connectors to top of Currents crown are recommended when attaching any end starter panel that is between the nominal height of the spine and the actual height with crown, such as a 42" h panel to 39" h spine with 4" h crown.</p> <p>Spine end connectors to top of Currents crown enclose the end of spine and standard crown and include flat top cap and inside top trim cover ( but do not include crown end cap).</p> <p>Inside base trim for Currents raceway is recommended to finish inside of any spine end connector when combined with standard Currents recessed base raceway covers. Base trim is not required with AutoStrada spine base covers.</p>
<b>AX1</b>	Spine connector																	
<b>SEC</b>	Type																	
<b>39</b>	Connector height																	
<b>39</b>	Spine height																	
<b>L</b>	Crown type																	
<b>613</b>	Crown end cap finish																	
<b>613</b>	Vertical cover finish																	
<b>812</b>	Top cap finish																	

Spine ends and connectors  
*High-low spine end connectors  
 for linkable screens and Morrison panels*

description	application	h	w	d	pattern no.	list
 Spine end connector	42" h panel/39" h spine	39"	5"	1/2"	<b>AX1SEC4239</b> ( ) ( )	\$204.
	48" h panel/39" h spine	48"	5"	1/2"	<b>AX1SEC4839</b> ( ) ( )	214.
	56" h panel/39" h spine	56"	5"	1/2"	<b>AX1SEC5639</b> ( ) ( )	245.
	64" h panel/39" h spine	64"	5"	1/2"	<b>AX1SEC6439</b> ( ) ( )	255.
	56" h panel/48" h spine	56"	5"	1/2"	<b>AX1SEC5648</b> ( ) ( )	245.
	64" h panel/48" h spine	64"	5"	1/2"	<b>AX1SEC6448</b> ( ) ( )	255.
	80" h panel/48" h spine	80"	5"	1/2"	<b>AX1SEC8048</b> ( ) ( )	388.
	80" h panel/64" h spine	80"	5"	1/2"	<b>AX1SEC8064</b> ( ) ( )	372.
	Inside base trim cover for Currents raceway		4"	5"		<b>AX1SECBT</b> ( )

**Order Code**

Example:	<b>AX1 SEC 6448 613 812</b>
<b>AX1</b>	Spine connector
<b>SEC</b>	Type
<b>64</b>	Panel ht.
<b>48</b>	Spline ht.
<b>613</b>	Painted finish
<b>613</b>	Trim finish

**Specification Information**

For spine end connectors specify:

- Vertical cover finish:  
All standard paint finishes
- Top cap for vertical cover  
812=Easy Grey  
813=Trim Grey  
And all standard painted finishes

**Application Notes**

High low spine end connectors are complete end cover and trim for an AutoStrada or Currents spine, when attached panels are taller than spine. High low spine end connectors match the height of the attached linkable screen or Morrison panel. Side edges of spine end connectors accept end starters for linkable screens and Morrison panels of the same height or lower.

High low spine end connectors include painted aluminum outside cover with flat top cap and inside cover over the end of the spine.

Inside base trim for Currents raceway is recommended to finish inside of any spine end connector when combined with standard Currents recessed base raceway covers. Base trim is not required with AutoStrada spine base covers.

**Note:** 42" h panel/39" h spine combination (AX1SEC4239) can only be specified with compact or flat crown versions of the spine. For combination of 39" h spine with standard crown and 42" h panels specify AX1SEC4339C ( ) ( ).

# End Starters


## For linkable screens or Morrison panels


description	application	h	w	d	pattern no.	00	02	04
End starters for linkable screens	30" h screen	25"	1"	1/2" - 4 1/2"	<b>AX1LES30</b> ( ) ( ) ( )	\$122.	\$133.	\$143.
	39" h screen	34"	1"	1/2" - 4 1/2"	<b>AX1LES39</b> ( ) ( ) ( )	133.	143.	158.
	48" h screen	43"	1"	1/2" - 4 1/2"	<b>AX1LES48</b> ( ) ( ) ( )	153.	173.	194.
	64" h screen	59"	1"	1/2" - 4 1/2"	<b>AX1LES64</b> ( ) ( ) ( )	179.	209.	240.
End starters for Morrison panels	30" h screen	30"	1"	1/2" - 4 1/2"	<b>AX1MES30</b> ( ) ( ) ( )	128.	133.	143.
	39" h screen	39"	1"	1/2" - 4 1/2"	<b>AX1MES39</b> ( ) ( ) ( )	153.	158.	173.
	42" h screen	42"	1"	1/2" - 4 1/2"	<b>AX1MES42</b> ( ) ( ) ( )	153.	158.	179.
	48" h screen	48"	1"	1/2" - 4 1/2"	<b>AX1MES48</b> ( ) ( ) ( )	158.	163.	184.
	56" h screen	56"	1"	1/2" - 4 1/2"	<b>AX1MES56</b> ( ) ( ) ( )	184.	204.	230.
	64" h screen	64"	1"	1/2" - 4 1/2"	<b>AX1MES64</b> ( ) ( ) ( )	184.	204.	230.
	80" h screen	80"	1"	1/2" - 4 1/2"	<b>AX1MES80</b> ( ) ( ) ( )	265.	306.	367.
End starter top cap for Morrison panel with linkable screen trim	00 flush		1"	2 1/4"	<b>AX1LES E00</b> ( )	10.		
	02 or 04 offset		1"	2 1/4"	<b>AX1LES E02</b> ( )		10.	10.

Order Code	Specification Information	Application Notes
Example: <b>AX1 LES 48 02 613 812</b>		
<b>AX1</b> Spine connector	For spine end starters specify:	End starters connect a linkable screen or panel to either side of a spine end connector of the same height or taller.
<b>L</b> for linkable screens	1. Configuration	End starters for linkable screens and Morrison panels include connector track and top cap.
<b>ES</b> End starter	00=Flush	For Morrison panels that have linkable screen trim also specify end starter linkable screen end cap. For flush (00) end starters specify AX1LES E00 ( ). For offset (02 or 04) end starters specify AX1LES E02 ( ).
<b>48</b> Panel height	02=Offset one panel	End starters are available in three configurations: flush with end of spine or offset one or two screen/panel thickness beyond end of spine.
<b>02</b> Offset	04=Offset two panels	
<b>613</b> Painted finish	2. Finish:	
<b>812</b> Trim finish	All standard paint finishes	
	3. Top cap	
	812=Easy Grey	
	813=Trim Grey	
		For full access to entire width of spine surface specify end starters offset one panel thickness (02 suffix).
		For a cluster of two workstations with one screen or panel between specify one end starter offset two panel thicknesses (04 suffix) and one offset one thickness (02).
		For a cluster of three workstations (two intermediate panels) specify two end starters offset two panel thicknesses (04).
		For a cluster of four workstations (three intermediate panels) extend the spine 12" and specify two flush end starters (00 suffix).

# Panel system starters and T-ends

## *Morrison or linkable screen panel starters*


description	type	w	d	h	pattern no.	paint	
	Morrison and linkable screen panel starters	30"H panel	4"	1"	26"	<b>AA1MPS30( )</b>	\$94.
	39"H panel/screen	4"	1"	35"	<b>AA1MPS39( )</b>	94.	
	42"H panel	4"	1"	38"	<b>AA1MPS42( )</b>	94.	
	48"H panel/screen	4"	1"	44"	<b>AA1MPS48( )</b>	99.	
	56"H panel	4"	1"	52"	<b>AA1MPS56( )</b>	104.	
	64"H panel/screen	4"	1"	60"	<b>AA1MPS64( )</b>	108.	
	74"H panel	4"	1"	70"	<b>AA1MPS74( )</b>	113.	
	80"H panel	4"	1"	76"	<b>AA1MPS80( )</b>	113.	
	Morrison raceway shroud	2 1/4"	3"	4"	<b>AA1MRS( )</b>	41.	
	panel/screen top clip				<b>AA2 MTC ( )</b>	48.	


	Morrison end trim	30"H panel	1"	2 1/4"	9"	<b>AA1MET30( )</b>	30.
	39"H panel	1"	2 1/4"	18"	<b>AA1MET39( )</b>	30.	
	42"H panel	1"	2 1/4"	21"	<b>AA1MET42( )</b>	33.	
	48"H panel	1"	2 1/4"	27"	<b>AA1MET48( )</b>	35.	
	56"H panel	1"	2 1/4"	35"	<b>AA1MET56( )</b>	37.	
	64"H panel	1"	2 1/4"	43"	<b>AA1MET64( )</b>	43.	
	74"H panel	1"	2 1/4"	53"	<b>AA1MET74( )</b>	48.	
	80"H panel	1"	2 1/4"	59"	<b>AA1MET80( )</b>	50.	

Currents end trim	39" linkable screen	1"	2"	18"	<b>AA1CET39( )</b>	30.
	48" linkable screen	1"	2"	27"	<b>AA1CET48( )</b>	35.
	64" linkable screen	1"	2"	43"	<b>AA1CET64( )</b>	43.

Order Code	Specification Information	Application Notes
Example: <b>AA1 MPS48 612</b>		
<b>AA1</b> Accessory	<i>Specify paint finishes for panel starters, Morrison raceway shroud and end trim.</i>	Panel starters attach perpendicular panels or linkable screens to Currents service wall structural base covers (5" - 21"H).
<b>M</b> Morrison		Optional Morrison end trim fills 5/8" reveal between panel end and Currents wall surface. End trim also includes end top cap (high/low corner top cap is not required in this application).
<b>PS</b> Panel starter	Specify trim grey or easy grey integral color for Currents end trim.	Panel starters include clamp bracket to any height Currents wall and full height connector track with modified top wedge block. For Morrison also specify high/low corner top cap <b>MT5 HLC ( )</b> in width of first panel.
<b>48</b> Panel height		Currents end trims are optional fillers for linkable screen starters. End trims may interfere with easy access to wall covers.
<b>612</b> Finish		Top clip connects panel connector track to Currents crown. Specify top clip for added stiffness of panels higher than 48" or whenever cantilevering components from panel. Top clip is not compatible with end trim.
		Specify raceway shroud if connecting power from Currents service wall to Morrison panel.

*Morrison, Currents screens and linkable screen T-ends non-upholstered*

description	type	w	d	h	pattern no.	0" or 1 1/8" extension	3 1/2" extension
 T ends for Currents screens and linkable screens	39" screen/39" spine	2 1/4"-5 3/4"	7"	39"	<b>AX2 C3939</b> ( ) ( ) ( )	\$647.	\$724.
	48" screen/39" spine	2 1/4"-5 3/4"	7"	48"	<b>AX2 C4839</b> ( ) ( ) ( )	750.	828.
	48" screen/48" spine	2 1/4"-5 3/4"	7"	48"	<b>AX2 C4848</b> ( ) ( ) ( )	698.	776.
	64" screen/39" spine	2 1/4"-5 3/4"	7"	64"	<b>AX2 C6439</b> ( ) ( ) ( )	855.	931.
	64" screen/48" spine	2 1/4"-5 3/4"	7"	64"	<b>AX2 C6448</b> ( ) ( ) ( )	802.	880.
	64" screen/64" spine	2 1/4"-5 3/4"	7"	64"	<b>AX2 C6464</b> ( ) ( ) ( )	802.	880.

description	type	w	d	h	pattern no.	0" or 1 1/8" extension	3 1/2" extension
 T ends for Morrison panels	39" panel/39" spine	6"	7"	39"	<b>AX1 M3939</b> ( ) ( ) ( )	647.	724.
	42" panel/39" spine	6"	7"	42"	<b>AX1 M4239</b> ( ) ( ) ( )	698.	776.
	48" panel/39" spine	6"	7"	48"	<b>AX1 M4839</b> ( ) ( ) ( )	750.	828.
	48" panel/48" spine	6"	7"	48"	<b>AX1 M4848</b> ( ) ( ) ( )	698.	776.
	56" panel/39" spine	6"	7"	56"	<b>AX1 M5639</b> ( ) ( ) ( )	802.	880.
	56" panel/48" spine	6"	7"	56"	<b>AX1 M5648</b> ( ) ( ) ( )	750.	828.
	64" panel/39" spine	6"	7"	64"	<b>AX1 M6439</b> ( ) ( ) ( )	855.	931.
	64" panel/48" spine	6"	7"	64"	<b>AX1 M6448</b> ( ) ( ) ( )	802.	880.
	64" panel/64" spine	6"	7"	64"	<b>AX1 M6464</b> ( ) ( ) ( )	802.	880.
	80" panel/39" spine	6"	7"	80"	<b>AX1 M8039</b> ( ) ( ) ( )	1,035.	1,138.
	80" panel/48" spine	6"	7"	80"	<b>AX1 M8048</b> ( ) ( ) ( )	1,035.	1,138.
	80" panel/64" spine	6"	7"	80"	<b>AX1 M8064</b> ( ) ( ) ( )	1,035.	1,138.

**Order Code**

Example:	<b>AX1 M6448 3 612, 612</b>
<b>AX1</b>	Currents connector
<b>M</b>	Morrison
<b>64</b>	Morrison height
<b>48</b>	Currents height
<b>3</b>	Extension
<b>612</b>	Top cap finish
<b>612</b>	Vertical trim cover

**Specification Information**

*T ends begin with AX1-prefix. Fourth position indicates attached panel system:*

C Currents screen/linkable screen  
 M Morrison panel

*Fifth/sixth position: height of panel.*

*Seventh/eighth position: height of service wall.*

*Ninth position: extension at end of spine.*

0 0" extension  
 1 1 1/8" extension  
 3 3 1/2" extension

*Tenth position: painted finish for Morrison top caps and crown end.*

*Eleventh position: painted finish for vertical trim cover.*

When ordering T-ends for spine with compact crown, specify compact crown end caps separately.

**Application Notes**

T-end encloses the end of a Currents service wall and connects to perpendicular Currents wall-attached screens, linkable screens or panels on one or both sides. T-ends include Morrison-style top trim for the 7" wide connection to panels or screens.

Currents T-end includes 5" and 6" wide trim and two end caps.

Morrison T-end includes 7" wide trim.

Use 5" wide trim and two end caps when connecting to Currents screens on both sides.

Use 6" wide trim and one end cap when connecting to Currents screens on one side only. Specify Morrison end connector separately to finish side edge without a connected screen.

Use 7" wide trim when connecting to Morrison panels.

Specify Morrison end connector, top cap and raceway cover kits separately to finish side edge of Morrison T-ends without a connected panel.

Specify Morrison straight connector separately to attach linkable screen or panel.

Specify T-ends for Morrison or Currents to capture the end of the wall (no extension) or to extend the wall 1 1/8" or 3 1/2". This extension enables precise planning of multiple workstations and intermediate panels between workstations.

Specify two 0" T-ends for a single workstation on each side (no intermediate panels).

Specify two 1 1/8" T-ends for one intermediate panel, one 1 1/8" and one 3 1/2" for two panels, and two 3 1/2" for three intermediate panels.





T-ends with 3 1/2" extension have removable inside covers and accept ceiling infeed panel.

# Panel system starters and T-ends

## Equity panel starters, end starters and trim kits

Currents

Service walls and components

description	type	pattern no.	list price	
	Equity panel starters	40"	<b>AA1EPS40</b>	\$228.
		41"	<b>AA3EPS41</b>	268.
		48"	<b>AA1EPS48</b>	238.
		49"	<b>AA3EPS49</b>	281.
		53"	<b>AA1EPS53</b>	248.
		60"	<b>AA1EPS60</b>	259.
		61"	<b>AA3EPS61</b>	306.
		64"	<b>AA3EPS64</b>	316.
		65"	<b>AA1EPS65</b>	269.
	Equity end starters	40"	<b>AX1 E40</b>	228.
		41"	<b>AX3E41</b>	268.
		48"	<b>AX1 E48</b>	238.
		49"	<b>AX3E49</b>	281.
		53"	<b>AX1 E53</b>	248.
		60"	<b>AX1 E60</b>	259.
		61"	<b>AX3E61</b>	306.
		64"	<b>AX3E64</b>	316.
		65"	<b>AX1 E65</b>	269.
	Equity end trim kits	39"H wall	<b>AX1 EET39(T,R,L)</b>	94.
		48"H wall	<b>AX1 EET48(T,R,L)</b>	125.
		64"H wall	<b>AX1 EET64(T,R,L)</b>	156.
		Crown end cap	<b>APT ( )</b>	5.
	Gap filler	40"/64"	<b>AX1 EGF24</b>	19.
		48"/64"	<b>AX1 EGF16</b>	10.
		53"/64"	<b>AX1 EGF11</b>	8.
		60"/64"	<b>AX1 EGF4</b>	6.

### Order Code

Example:	<b>AX1EET64T 612</b>
<b>AX1</b>	Accessory
<b>EET</b>	Equity end trim
<b>64</b>	Panel height
<b>T</b>	"T" both sides
<b>612</b>	Trim finish

### Specification Information

Specify paint finish for Equity end and panel starters, trim kits and crown end cap.

#### Note:

For more specific application information, please refer to the 1999 Equity Planning Guide. Additional finishes are available for crown end cap.

### Application Notes

Equity panel starters attach perpendicular panels to Currents wall structural base covers. Equity panel starter includes clamp bracket and adapter. Both end and panel starters include top clip for added stiffness. No connector post is required for either starter.

Equity end starter supports perpendicular panel run on the centerline of the end of the wall. Perpendicular panels should be at the same height or higher than the service wall.


The Equity end trim kit encloses and flushes out the end of the Currents service wall with attached, end started Equity panels.


Specify trim kit suffix "T" for panels on both sides, "L" or "R" for attached panels only on left or right side of end of the Currents wall (as seen from outside of "T" end). Also specify crown end cap for all end conditions.

Gap fillers fill the gap when attaching a lower height Equity panel at the end of a 64"H Currents service wall.


# Panel system starters and T-ends

## Reff panel starters and T-ends

description	type	pattern no.	price	0" or 1 1/8" extension	3 1/2" extension
 Reff panel starter	34"H (includes AA1RTC bracket)	<b>AA1RPS34</b> ( ) ( ) ( )	\$104.		
	42"H (includes AA1RTC bracket)	<b>AA1RPS42</b> ( ) ( ) ( )	181.		
	49"H (includes AA1RTC bracket)	<b>AA1RPS49</b> ( ) ( ) ( )	186.		
	64"H (includes AA1RTC bracket)	<b>AA1RPS64</b> ( ) ( ) ( )	197.		
	79"H (includes AA1RTC bracket)	<b>AA1RPS79</b> ( ) ( ) ( )	206.		

 T-end frame for Reff panels	42" Reff panel to 39" Currents	<b>AX1 R34239</b> ( ) ( )	776.	855.
	49" Reff panel to 39" Currents	<b>AX1 R34939</b> ( ) ( )	785.	864.
	49" Reff panel to 48" Currents	<b>AX1 R34948</b> ( ) ( )	735.	812.
	64" Reff panel to 39" Currents	<b>AX1 R36439</b> ( ) ( )	868.	946.
	64" Reff panel to 48" Currents	<b>AX1 R36448</b> ( ) ( )	817.	895.
	64" Reff panel to 64" Currents	<b>AX1 R36464</b> ( ) ( )	817.	895.
	79" Reff panel to 39" Currents	<b>AX1 R37939</b> ( ) ( )	874.	953.
	79" Reff panel to 48" Currents	<b>AX1 R37948</b> ( ) ( )	823.	901.
	79" Reff panel to 64" Currents	<b>AX1 R37964</b> ( ) ( )	797.	874.

Top clip (replacement part)	<b>AA1RTC</b> ( )	78.
-----------------------------	-------------------	-----



Order Code	Specification Information	Application Notes														
Example: <b>AA1-RPS64 48 A 613</b> <b>AA1</b> Accessory <b>R</b> Reff <b>PS</b> Panel starter <b>64</b> Panel height <b>48</b> Adjoining panel width <b>A</b> Panel top trim profile <b>613</b> Finish, panel starter <b>613</b> Panel top trim finish	<p><i>For T-end specify extension at end of spine, then paint finish. Extension at end of spine:</i></p> <table border="0"> <tr><td>0</td><td>0" extension</td></tr> <tr><td>1</td><td>1 1/8" extension</td></tr> <tr><td>3</td><td>3 1/2" extensions</td></tr> </table> <p><i>Specify following for panel starter:</i></p> <table border="0"> <tr><td>1</td><td>Adjoining panel width</td></tr> <tr><td>2</td><td>Top trim profile of adjoining panel</td></tr> <tr><td>3</td><td>Painted finish for panel starter</td></tr> <tr><td>4</td><td>Top trim finish</td></tr> </table> <p>In addition to Currents finishes, all standard Reff system painted finishes are available.</p> <p>When ordering T-ends for the spine with compact crown, specify compact crown end caps separately.</p>	0	0" extension	1	1 1/8" extension	3	3 1/2" extensions	1	Adjoining panel width	2	Top trim profile of adjoining panel	3	Painted finish for panel starter	4	Top trim finish	<p>Panel starters attach perpendicular Reff panels to Currents service wall. Panel starter includes clamp bracket to structural base cover, top clip, vertical extrusion corresponding to Reff panel height and top trim for adjoining panel.</p> <p>T-end encloses the end of a Currents service wall and connects to perpendicular Reff panels on one or both sides.</p> <p>Specify Reff straight connector separately to attach panel.</p> <p>Specify Reff end connector to finish side edge without a connected wall.</p> <p>Specify T-end with 0", 1 1/8", or 3 1/2" of extension to accommodate the "creep" of panels between workstations on each side of service wall.</p> <p>Specify two 0" T-ends for a single workstation on each side (no intermediate panels).</p> <p>Specify two 1 1/8" T-ends for one intermediate panel, one 1 1/8" and one 3 1/2" for two panels, and two 3 1/2" for three intermediate panels.</p> <p>T-ends with 3 1/2" extension have removable inside covers and accept ceiling infeed panel.</p> <p>Only Reff finishes are available for AA1RTC( ) top clip.</p>
0	0" extension															
1	1 1/8" extension															
3	3 1/2" extensions															
1	Adjoining panel width															
2	Top trim profile of adjoining panel															
3	Painted finish for panel starter															
4	Top trim finish															





# Panel system starters and T-ends

## Reff T-end fabric and wood cover sets

Currents

Service walls and components

description	type	height	pattern no.	list price
 Monolithic cover set	Fabric	42"	<b>R3B0P0F4207</b>	\$110.
		49"	<b>R3B0P0F4907</b>	124.
		64"	<b>R3B0P0F6407</b>	147.
		79"	<b>R3B0P0F7907</b>	168.
	Wood	42"	<b>R3B0P0H4207</b>	113.
		49"	<b>R3B0P0H4907</b>	127.
		64"	<b>R3B0P0H6407</b>	150.
		79"	<b>R3B0P0H7907</b>	172.
 Tiled cover set	Fabric	42"	<b>R3B0T0F4207</b>	110.
		49"	<b>R3B0T0F4907</b>	124.
		64"	<b>R3B0T0F6407</b>	147.
		79"	<b>R3B0T0F7907</b>	168.
	Wood	42"	<b>R3B0T0H4207</b>	113.
		49"	<b>R3B0T0H4907</b>	127.
		64"	<b>R3B0T0H6407</b>	150.
		79"	<b>R3B0T0H7907</b>	172.

### Order Code

Example:	<b>R3B0P0F4207</b>
<b>R3B</b>	Reff
<b>0P0F</b>	Monolithic
<b>42</b>	Panel height
<b>07</b>	Width

### Specification Information

See Reff System for full selection of painted finishes, fabrics and wood veneers for T-end cover sets.

#### Specify:

1. Top trim profile
2. Panel finishes
3. Top trim finish
4. Base finish

#### Top trim profile:

- A Flat
- B Square
- C Bullnose

#### Base height:

- 4 4" base height

6" base height is currently not available.

### Application Notes

Specify covers in monolithic or tiled sets to complete T-end frames for Reff.

Monolithic cover sets include a raceway cover and a single snap-in panel above.

Tiled sets include raceway cover and segmented tiles corresponding to adjacent Reff tiled panels.




Reff tiled module horizontal reveals are at nominal 19", 34", 49" and 64" above the floor and do not align with service wall cover reveals.

When ordering T-ends for the spine with compact crown, specify compact crown end caps separately.

# Panel system starters and T-ends

## *Universal panel starters and T-ends*

Currents

description	w	d	h	pattern no.	paint
 Universal T-end adapter	2-6"	7"	39"	<b>AA1UA39( )</b>	\$61.
	2-6"	7"	48"	<b>AA1UA48( )</b>	73.
	2-6"	7"	64"	<b>AA1UA64( )</b>	82.
 Universal panel starters	3"	1"	39"	<b>AA1UPS39( )</b>	144.
	3"	1"	48"	<b>AA1UPS48( )</b>	156.
	3"	1"	64"	<b>AA1UPS64( )</b>	165.
 Universal top clip				<b>AA2 UTC ( )</b>	62.

### Order Code

Example:	<b>AA1 UPS48 612</b>
<b>AA1</b>	Accessory
<b>UPS</b>	Panel starter
<b>48</b>	Panel height
<b>612</b>	Finish

### Specification Information

*Specify paint finishes for Universal end and panel starter.*

### Application Notes

Universal adapters and starters integrate other panel systems with the service wall. Vertical surface accepts architectural wall starter of most other systems.

T-end adapters include connector to corresponding height T-end for Currents screen (specified separately).

Panel starter includes clamp bracket to structural base cover on service wall.





Top clip gives added stability to attached panels of the same height or higher than the service wall.

# Panel system starters and T-ends

## *fence panel starters*

Currents

Service walls and components



description	type	w	d	h	pattern no.	list price
 Panel starter for Morrison panels/ Currents linkable screens	30"H panel	4"	1"	26"	<b>AA1FMPS30()</b>	\$61.
	39"H panel/screen	4"	1"	35"	<b>AA1FMPS39()</b>	62.
	42"H panel	4"	1"	38"	<b>AA1FMPS42()</b>	62.
	48" H panel/screen	4"	1"	44"	<b>AA1FMPS48()</b>	68.
	56"H panel	4"	1"	52"	<b>AA1FMPS56()</b>	68.
	64" H panel/screen	4"	1"	60"	<b>AA1FMPS64()</b>	73.
Universal panel starter		3"	1"	35"	<b>AA1FUPS39()</b>	96.
 Universal panel starter						
 Universal top clip					<b>AA2 UTC ()</b>	62.
 Morrison and linkable screen panel starters	panel/screen top clip				<b>AA2 MTC ()</b>	48.

Order Code	Specification Information	Application Notes
Example: <b>AA1 FMPS48 613</b>	<i>Specify paint finish for panel starters and top clip.</i>	Panel starters attach perpendicular panels to the Fence bottom rail.  Panel starters include clamp bracket and full height connector track with modified top wedge block. For Morrison also specify high/low corner topcap in width of first panel.  Top clip connects panel connector track with the Fence crown. Specify top clip for added stiffness of panels higher than 48" or whenever cantilevering components from panel.  Top clip is not compatible with end trim.
<b>AA1</b> Accessory		
<b>F</b> Fence		
<b>MPS</b> Morrison panel starter		
<b>48</b> Panel height		
<b>613</b> Finish	Universal panel starters integrate other panel systems with the Currents Fence. Vertical surface accepts architectural wall starters of most other systems.	

# Panel system starters and T-ends

## *end trim for fence panel starters*

Currents

description	type	w	d	h	pattern no.	list price
 End trim for Morrison panels	30"H panel	1"	2 1/4"	30"	<b>AA1FMET30( )</b>	\$79.
	39"H panel	1"	2 1/4"	39"	<b>AA1FMET39( )</b>	79.
	42"H panel	1"	2 1/4"	42"	<b>AA1FMET42( )</b>	82.
	48" H panel	1"	2 1/4"	48"	<b>AA1FMET48( )</b>	84.
	56" H panel	1"	2 1/4"	56"	<b>AA1FMET56( )</b>	86.
	64" H panel	1"	2 1/4"	64"	<b>AA1FMET64( )</b>	92.
 End trim for linkable screens	39" H screen	1"	2"	35"	<b>AA1FCET39</b>	65.
	48" H screen	1"	2"	44"	<b>AA1FCET48</b>	73.
	64" H screen	1"	2"	60"	<b>AA1FCET64</b>	82.

### Order Code

Example: **AA1 FMET39 612**

<b>AA1</b>	Accessory
<b>F</b>	Fence
<b>MET</b>	Morrison end trim
<b>39</b>	Panel height
<b>612</b>	Finish

### Specification Notes

*Specify paint finish for end trim for Morrison panels.*

Morrison end trim includes end raceway cover in matching color.


Linkable screen end trim is trim grey integral color.

### Application Notes

Optional end trim is available for the panel starter connector track. End trim covers the connector track above and below the panel starter clamp bracket.

Power, data and communications components for service walls  
 2+2 raceway  
 outlet module, central switch and outlets

description	type	w	d	h	pattern no.	black	orange (-O) or orange triangle (-T)	no finish
Desk height outlet module	21-48"H	5"	-	6"	<b>AR1 EOM</b>			\$138.



Central switch	21-48"H				<b>AR1-ELS-B</b>			385.
Duplex outlet	Circuit A				<b>AR1 DA</b>	33.		
	Circuit B				<b>AR1 DB</b>	33.		
	Circuit X				<b>AR1 DX</b>	33.	38.	
	Circuit Y				<b>AR1 DY</b>	33.	38.	

Order Code	Specification Information	Application Notes
Example: <b>AR1 EOM</b>		
<b>AR1</b> Raceway	Raceway components distribute four 20-amp circuits at desk height or service wall base: two convenience circuits and two protected circuits, with separate grounds and heavy duty #10 neutrals.	Service wall power may be distributed point-to-point between outlet modules at desk height or in the base raceway.  Outlet housings and power rails accept two duplex outlets on each face and four connector/jumper cables.  Modular desk-height outlet module mounts between frame studs at any height from 21" - 48", above or below adjacent worksurfaces. Each 12"W frame bay can accept two outlet housings (up to four duplex outlets on each side.)  Central switch controls three outlets inside wall frame for task or ambient lights. Switch occupies right-hand outlet opening in outlets cover on one side of wall.  Switches cannot be positioned back-to-back in combination with an outlet module.
<b>E</b> 2+2		
<b>OM</b> Outlet module		
		Central switch includes white rocker switch, connector to adjacent outlet module, and three simplex outlets on circuit B (2+2 or 3+3).  Outlet modules and power rails accept two duplex outlets on each face. Specify outlets with black face for convenience circuits. Specify orange face or black with orange triangle for protected circuits with separate ground and neutral in building power supply.

Power, data and communications components for service walls  
 2+2 raceway  
 other hardware

Currents

description	type	w	d	h	pattern no.	no finish
Power infeeds, modular	Base power	49"			AR1 EPI2	\$132.
	Desk height power	85"			AR1 EPI5	159.
	Ceiling infeed	145"			AR1 EPIC	199.
Hardwire base infeeds (NYC)	One connector				AR1 EPH1	265.
	Two connectors				AR1 EPH2	397.
Transitional connectors for Morrison or Reff	12"	61"			AR1 ET1	146.
	36"	85"			AR1 ET3	184.
	60"	109"			AR1 ET5	212.
	96"	133"			AR1 ET8	237.
Jumper cable	12" wall/36" desk	37"			AR1 EJ1	80.
	24" wall/48" desk	49"			AR1 EJ2	105.
	36" wall/60" desk	61"			AR1 EJ3	119.
	48" wall/84" desk	73"			AR1 EJ4	131.
	60" wall/84" desk	85"			AR1 EJ5	146.
	72" wall/96" desk	97"			AR1 EJ6	159.
	96" wall/120" desk	121"			AR1 EJ8	184.
	120" wall/144" desk	145"			AR1 EJ10	211.
144" wall	169"			AR1 EJ12	237.	

Order Code	Specification Information	Application Notes
Example: <b>AR1 ET1</b> <b>AR1</b> Raceway <b>E</b> 2+2 <b>T</b> Transitional <b>1</b> Length	<p>Raceway components distribute four 20-amp circuits at desk height or panel base: two convenience circuits and two protected circuits, with separate grounds and heavy duty #10 neutrals.</p> <p><b>NOTE: The City of New York does not approve use of liquid-tight PVC conduit.</b> For installations anywhere in the City of New York, specify NYC infeed kits (AR1 EPH1 or 2, AR1 TPH1 or 2), which do not contain PVC. To connect power from the Currents service wall to wall-started panels: specify standard (not transitional) jumper cables. Also specify Raceway Cable Managers (AR1 RCM) to support power jumpers within the Currents wall base between the base or desk-height power module and the attached panel.</p>	<p>Desk height power infeed connects from floor box to desk height outlets module inside service wall.</p> <p>Ceiling infeed connects from ceiling junction box to desk height outlet module or to base power rail. Specify Currents ceiling infeed panel separately.</p> <p>Base power infeed connects building power to either end of base raceway power rail.</p> <p>Hardwire base infeed is approved for City of New York installations. Infeed includes junction box for base raceway and connector to desk height outlet module, or two connectors to adjacent base raceway power rails.</p> <p>Transitional connectors connect Currents service wall power components to powered Morrison or Reff panels or Morrison Network desks. Application dimension indicates distance</p>

from service wall desk-height outlet module to perpendicular panel with powered base.


Specify jumper cables between outlet modules. Application dimension indicates maximum wall cover width between outlets covers at the same height. Excess cable may be stored in interior of wall frame.

Base raceway power rail is suspended between panel supports 3" above floor. 48" wall accepts one 12" rail, 60" wall accepts one 24" rail, 72" accepts two 12" rails. 12" rails may also be inserted at any straight connection.

Specify 12" base power connector between 12" rails in a 72"W wall base, or straddling a wall connection. Specify 36" base power connector to pass through a connection between adjacent powered bases.

2+2 raceway  
other hardware

description	type	w	d	h	pattern no.	no finish
Base raceway power rail	48" or 72" frame	12"	–	2"	<b>AR1 E2</b>	\$146.
	60" frame	24"	–	2"	<b>AR1 E3</b>	172.
Base power connector	Within a frame	12"			<b>AR1 EPC1</b>	66.
	Frame to frame	36"			<b>AR1 EPC2</b>	80.



**Order Code**

Example:	<b>AR1 ET1</b>
<b>AR1</b>	Raceway
<b>E</b>	2+2
<b>T</b>	Transitional
<b>1</b>	Length

**Specification Information**

Raceway components distribute four 20-amp circuits at desk height or panel base: two convenience circuits and two protected circuits, with separate grounds and heavy duty #10 neutrals.

**NOTE: The City of New York does not approve use of liquid-tight PVC conduit.** For installations anywhere in the City of New York, specify NYC infeed kits (AR1 EPH1 or 2, AR1 TPH1 or 2), which do not contain PVC. To connect power from the Currents service wall to wall-started panels: specify standard (not transitional) jumper cables. Also specify Raceway Cable Managers (AR1 RCM) to support power jumpers within the Currents wall base between the base or desk-height power module and the attached panel.

**Application Notes**

Desk height power infeed connects from floor box to desk height outlets module inside service wall.

Ceiling infeed connects from ceiling junction box to desk height outlet module or to base power rail. Specify Currents ceiling infeed panel separately.

Base power infeed connects building power to either end of base raceway power rail.

Hardwire base infeed is approved for City of New York installations. Infeed includes junction box for base raceway and connector to desk height outlet module, or two connectors to adjacent base raceway power rails.

Transitional connectors connect Currents service wall power components to powered Morrison or Reff panels or Morrison Network desks. Application dimension indicates distance

from service wall desk-height outlet module to perpendicular panel with powered base.

Specify jumper cables between outlet modules. Application dimension indicates maximum wall cover width between outlets covers at the same height. Excess cable may be stored in interior of wall frame.


Base raceway power rail is suspended between panel supports 3" above floor. 48" wall accepts one 12" rail, 60" wall accepts one 24" rail, 72" accepts two 12" rails. 12" rails may also be inserted at any straight connection.

Specify 12" base power connector between 12" rails in a 72"W wall base, or straddling a wall connection. Specify 36" base power connector to pass through a connection between adjacent powered bases.

3+3 raceway

outlet module, central switch and outlets

description	type	w	d	h	pattern no.	black	orange (-O) or orange triangle (-T)	no finish
Desk-height outlet module	21"-48"H	6"	1"	9"	<b>AR1 TOM</b>			\$159.



Central switch	21-48"H				<b>AR1-ELS-B</b>			385.
----------------	---------	--	--	--	------------------	--	--	------

Duplex outlet	Circuit A				<b>AR1 DA</b>	33.		
	Circuit B				<b>AR1 DB</b>	33.		
	Circuit C				<b>AR1 DC</b>	33.		
	Circuit X				<b>AR1 DX</b>	33.	38.	
	Circuit Y				<b>AR1 DY</b>	33.	38.	38.
	Circuit Z				<b>AR1 DZ</b>	33.	38.	38.

Order Code	Specification Information	Application Notes
Example: <b>AR1 TOM</b>		
<b>AR1</b> Raceway		
<b>T</b> 3+3		
<b>OM</b> Outlet Module		
	Raceway components distribute six 20-amp circuits at desk height or wall base: three convenience circuits and three protected circuits, with separate grounds and heavy-duty #10 neutrals.	<p>Service wall power may be distributed point-to-point between outlet modules at desk height or in the base raceway. Outlet modules and power rails accept two duplex outlets on each face and four connector/jumper cables.</p> <p>Modular desk-height outlet module mounts between frame studs at any height from 21" - 48", above or below adjacent worksurfaces. Each 12"W frame bay can accept two outlet housings (up to four duplex outlets on each side.)</p> <p>Central switch controls three outlets inside wall frame for task or ambient lights. Switch occupies right-hand outlet opening in outlets cover on one side of wall.</p> <p>Central switch includes white rocker switch, connector to adjacent outlet module, and three simplex outlets on circuit B (2+2 or 3+3).</p>
		Outlet modules and power rails accept two duplex outlets on each face. Specify outlets with black face for convenience circuits. Specify orange face or black with orange triangle for protected circuits with separate ground and neutral in building power supply.



Power, data and communications components for service walls  
 3+3 raceway  
 other hardware

description	type	w	d	h	pattern no.	no finish
Power infeeds	Base power	49"			AR1 TPI2	\$159.
	Desk height power	85"			AR1 TPI5	184.
	Ceiling infeed	145"			AR1 TPIC	225.
Hardwire base infeeds (NYC)	One connector				AR1 TPH1	291.
	Two connectors				AR1 TPH2	451.
Jumper cable	12" wall/36" desk	37"			AR1 TJ1	92.
	24" wall/48" desk	49"			AR1 TJ2	119.
	36" wall/60" desk	61"			AR1 TJ3	146.
	48" wall/72" desk	73"			AR1 TJ4	159.
	60" wall/84" desk	85"			AR1 TJ5	172.
	72" wall/96" desk	97"			AR1 TJ6	184.
	96" wall/120" desk	121"			AR1 TJ8	211.
	120" wall/144" desk	145"			AR1 TJ10	237.
Transitional connectors for Morrison or Reff	12" wall	169"			AR1 TJ12	264.
	12"	61"			AR1 TT1	172.
	36"	85"			AR1 TT3	212.
	60"	109"			AR1 TT5	237.
Base raceway power rail	96"	133"			AR1 TT8	265.
	48" or 72" frame	12"			AR1 T2	172.
Base power connectors	60" frame	24"			AR1 T3	199.
	Within a frame	13"			AR1 TPC1	80.
	Frame to frame	37"			AR1 TPC2	92.

Order Code	Specification Information	Application Notes
Example: <b>AR1 TT5</b>	Raceway components distribute six 20-amp circuits at desk height or wall base: three convenience circuits and three protected circuits, with separate grounds and heavy-duty #10 neutrals.  <b>NOTE: The City of New York does not approve use of liquid-tight PVC conduit.</b> For installations anywhere in the City of New York, specify NYC infeed kits (AR1 EPH1 or 2, AR1 TPH1 or 2), which do not contain PVC. To connect power from the Currents service wall to wall-started panels: specify standard (not transitional) jumper cables. Also specify Raceway Cable Managers (AR1 RCM) to support power jumpers within the Currents wall base between the base or desk-height power module and the attached panel.	Desk height power infeed connects from floor box to desk height outlets module inside service wall.
<b>AR1</b> Raceway		Ceiling infeed connects from ceiling junction box to desk height outlet module or to base power rail. Specify Currents ceiling infeed panel separately.
<b>T</b> 3+3		Base power infeed connects building power to either end of base raceway power rail.
<b>T</b> Transitional		Hardwire base infeed is approved for City of New York installations. Infeed includes junction box for base raceway and connector to desk height outlet module, or two connectors to adjacent base raceway power rails.
<b>5</b> Length		Transitional connectors connect Currents service wall power components to powered Morrison or Reff panels or Morrison Network desks.
		Specify jumper cables between outlet modules. Application dimension indicates maximum wall cover width between outlets covers at the same height. Excess cable may be stored in interior of wall frame.  Base raceway power rail is suspended between panel supports 3" above floor. 48" wall accepts one 12" rail, 60" wall accepts one 24" rail, 72" accepts two 12" rails. 12" rails may also be inserted at any straight connection.  Specify 12" base power connector between 12" rails in a 72"W wall base, or straddling a wall connection. Specify 36" base power connector to pass through a connection between adjacent powered bases.
		Application dimension indicates distance from service wall outlet module to perpendicular panel.

Power, data and communications components for service walls  
*replacement components for Equity*

Currents





description	type	w	d	h	pattern no.	no finish	black	orange (-O) or orange triangle (-T)
Replacement duplexes for Equity	Circuit A				<b>ARE1 DA</b>		\$33.	
	Circuit B				<b>ARE1 DB</b>		33.	
	Circuit C				<b>ARE1 DC</b>		33.	
	Circuit X				<b>ARE1 DX</b>		33.	
	Circuit X, orange face or orange triangle				<b>ARE1 DX (O or T)</b>			38.
	Circuit Y				<b>ARE1 DY</b>		33.	
	Circuit Y, orange face or orange triangle				<b>ARE1 DY (O or T)</b>			38.
	Circuit Z				<b>ARE1 DZ</b>		33.	
	Circuit Z, orange face or orange triangle				<b>ARE1 DZ (O or T)</b>			38.
Transitional power connector Equity 2+2	12"		61"		<b>ARE1 ET1</b>		146.	
	36"		85"		<b>ARE1 ET3</b>		184.	
	60"		109"		<b>ARE1 ET5</b>		212.	
Transitional power connector Equity 3+3	12"		61"		<b>ARE1 TT1</b>		172.	
	36"		85"		<b>ARE1 TT3</b>		212.	
	60"		109"		<b>ARE1 TT5</b>		237.	
Replacement power infeed, Equity panel	2+2				<b>ARE1 EP1</b>		218.	
	3+3				<b>ARE1 TP1</b>		251.	

Order Code	Specification Information	Application Notes
Example: <b>ARE1 ET3</b>		
<b>ARE1</b>	Currents/Equity raceway	Replacement duplexes for Equity convert existing 3+1 terminal blocks in Equity panels to 2+2 when connected to and supplied by Currents service wall 2+2 or 3+3 power.  Transitional power connector connects service wall power components to Equity panel base power.  Application dimension indicates distance between service wall outlet module (at 30"-39"H) and perpendicular panel.  Specify replacement power infeed when supplying power to Currents service wall from Equity panel base infeed.
<b>E</b>	Eight wire 2+2	
<b>T</b>	Transitional connector	
<b>3</b>	Width	

# Power, data and communications components for service walls accessories, ceiling infeed panel

Currents

Service walls and  
components

description	w	d	h	pattern no.	no finish	paint
Cable clips for wall studs (100) 	1/4"	1/2"	1 1/2"	<b>AR1 PCC 100</b>	\$66.	
High capacity cable holders (10) 	1"	3/4"	2 1/2"	<b>AR1 HCC H10</b>	27.	
Raceway cable managers (10) 				<b>AR1 RCM 10</b>	52.	
Ceiling infeed panel for stabilizer end cabinet, T-end or power monument 	3 1/2"	5"	48"	<b>APX CIP4 ( )</b>		365.
	3 1/2"	5"	72"	<b>APX CIP6 ( )</b>		426.
	3 1/2"	5"	96"	<b>APX CIP8 ( )</b>		487.

Order Code	Specification Information	Application Notes
Example: <b>AR1 PCC 100</b>	Cable clips and cable managers are black plastic.	Specify cable clips, approximately 50 per wall frame to support and manage cables on the face of studs in the Currents wall frame. Each clip manages up to 14 Category 5 or fiber optic cables; four clips attach between 21"-30", 30"-39", 39"-48"; six between 48"-64"H. Only two clips fit behind a cable tray cover at the 21"-30" height.
<b>AR1</b> Raceway	Cable holders are light grey plastic.	
<b>PCC</b> Cable clip	<i>Specify painted finish for hardwire outlets cover or ceiling infeed panel.</i>	
<b>100</b> Size/Quantity		Specify high capacity cable holders approximately 20 per wall frame to support and manage larger bundles of cables. Each holds up to 55 Cat 5 cables; two holders attach to studs at each 9" level; three holders at the 16" level of a 64"H wall. Only one holder fits behind a cable tray cover at the 21"-30" height (upside down).
		Raceway cable managers are U-shape cable supports that snap into the underside of the panel frame. Plan one per foot to contain data cables or power jumpers in the base raceway.
		Ceiling infeed panel attaches to end of spine adjacent to stabilizer end cabinet or Currents, Morrison, or Ref T-end panel with 3 1/2" extension, or to power monument. Center channel, 2" x 2 1/2", accommodates one or two power infeed cables. Each side channel is 1 1/2" x 3 1/2" lay-in cable raceway, for continuous lay-in cabling from ceiling to wall surface.
		Specify ceiling infeed separately.

# Power, data and communications components for service walls

## PDC modules, modular communications

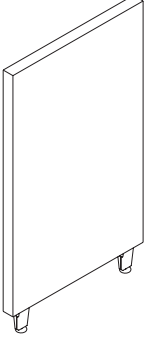
Currents

description	type	application	pattern no.	black
PDC Module accessories	PDC Module extender (set of 10)		<b>MR3 PDCX</b>	\$119.
AMP PDC Modules	Faceplate and 4 Enhanced Category 5 outlets		<b>AMC PDC 5E4N</b>	178.
AMP Modular components	Blank insert (10)		<b>AMC B10</b>	19.
	Category 3 outlet (RJ11 six position)	Punch-down back	<b>AMC O3</b>	19.
	Category 6 quantum (RJ45, 110)	Punch-down back	<b>AMC O6</b>	43.
	Communications faceplates	AMP outlet faceplate, 2-port	<b>AMC FP2 (L or N)</b>	19.
	Communications faceplates	AMP outlet faceplate, 3-port	<b>AMC FP3 (L or N)</b>	19.
	Enhanced Category 5 outlet (RJ45, 110)	Punch-down back	<b>AMC O5E</b>	28.
	Fiber optics outlet 50/125 micron fiber jack		<b>AMC OF500</b>	143.
	Fiber optics outlet 62.5/125 micron fiber jack		<b>AMC OF625</b>	143.
AMP modular communications/ zone distribution	AMP NetConnect consolidation point, 12-port		<b>AMC5 CP12</b>	562.
	AMP NetConnect mounting bracket		<b>AMB CP12-AMP</b>	38.
	AMP pre-terminated outlet cable, 20'		<b>AMC5 OC20(A or B)</b>	72.
	AMP pre-terminated outlet cable, 30'		<b>AMC5 OC30(A or B)</b>	80.
	AMP pre-terminated outlet cable, 40'		<b>AMC5 OC40(A or B)</b>	85.
	AMP pre-terminated outlet cable, 50'		<b>AMC5 OC50(A or B)</b>	91.
Lucent PDC Modules	Communications faceplate and 2 Category 5 110 outlets (10)		<b>MR3 ATT2</b>	723.
	Communications faceplate and 3 Category 5 110 outlets (10)		<b>MR3 ATT3</b>	1,022.
Lucent zone distribution	Hinged mounting brackets for 24-port consolidation point (pair)		<b>AMB CP24 LUC</b>	103.
Outlet fillers (Set of 10)			<b>AR OF</b>	29.

Order Code	Specification Information	Application Notes
Example: <b>MR3 AMP3B</b>	<i>For AMP pre-terminated outlet cables specify:</i>	PDC Modules are preconfigured or created from modular components and faceplate that snaps into service wall outlets cover, raceway cover, desk service beam, credenza stanchion outlets cover, or power monument.
<b>MR3</b> Raceway/PDC	T568A or T568B wiring.	
<b>AMP</b> Type	<i>For AMP outlet faceplates specify:</i>	See Morrison price list for additional PDC module configurations.
<b>3B</b> Configuration	L Light grey N Black	
	Amp outlets are black. Lucent faceplates are light grey.	Specify PDC Module extenders for adequate clearance between modules in back-to-back applications, or for fiber optics ST connectors.
		Specify blank filler plates for any unused outlet openings in outlets covers or raceway covers.
		AMP NetConnect mounting bracket supports one 12-port consolidation point on stud or two in stabilizer end cabinet.
		AMP pre-terminated outlet cables include outlet and plug into consolidation point. AMP outlet faceplate snaps into outlets cover and supports cable outlet.
		Each Lucent mounting bracket supports one 24-port consolidation point and is hinged for easy access. Bracket mounts on service wall frame or stabilizer end cabinet.

# Linkable screens glazed, translucent, and perforated

Currents

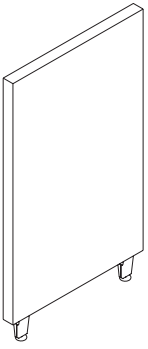
description	type	w	d	h	pattern no.	glazed G(C/S/T)	fiberglass TC	perforated H
	39"H	24"	2"	39"	AP1 3924( ) ( )	\$752.	\$1,106.	\$1,513.
		36"	2"	39"	AP1 3936( ) ( )	902.	1,387.	1,974.
		48"	2"	39"	AP1 3948( ) ( )	1,084.	1,761.	2,529.
		60"	2"	39"	AP1 3960( ) ( )	n/a	2,009.	2,954.
	48"H	18"	2"	48"	AP1 4818( ) ( )	751.	n/a	n/a
		24"	2"	48"	AP1 4824( ) ( )	828.	1,253.	1,748.
		30"	2"	48"	AP1 4830( ) ( )	919.	n/a	n/a
		36"	2"	48"	AP1 4836( ) ( )	993.	1,479.	2,215.
		42"	2"	48"	AP1 4842( ) ( )	1,107.	n/a	n/a
		48"	2"	48"	AP1 4848( ) ( )	1,193.	1,915.	2,876.
		60"	2"	48"	AP1 4860( ) ( )	n/a	2,257.	3,439.
	64"H	18"	2"	64"	AP1 6418( ) ( )	873.	n/a	n/a
		24"	2"	64"	AP1 6424( ) ( )	980.	1,553.	2,239.
		30"	2"	64"	AP1 6430( ) ( )	1,071.	n/a	n/a
		36"	2"	64"	AP1 6436( ) ( )	1,177.	1,938.	2,919.
		42"	2"	64"	AP1 6442( ) ( )	1,269.	n/a	n/a
		48"	2"	64"	AP1 6448( ) ( )	1,408.	2,499.	3,782.
		60"	2"	64"	AP1 6460( ) ( )	n/a	2,901.	n/a

Screens and add-up panels

Order Code	Specification Information	Application Notes
Example: <b>AP1 3924 GT 612 813</b>	<i>Surface types:</i>	Linkable screens divide workstations perpendicular to service wall where base raceway is not required. Linkable screens connect with standard Morrison/Currents wall starters and Currents linkable screen connectors.
<b>AP1</b> Currents screen	G Glazed	
<b>39</b> Height	TC Translucent fiberglass	
<b>24</b> Width	H Perforated	Screens are supported by two legs with leveling glides and include Currents top cap. Specify connectors separately.
<b>G</b> Surface type	<i>For glazed panels specify:</i>	
<b>T</b> Surface finish	C Clear tempered glass	Glazed linkable screens use Morrison glazed panel construction. Fiberglass and perforated screen surfaces are bonded to D-frame panel construction.
<b>612</b> Frame finish	S Smoked acrylic	
<b>813</b> Trim color	T Translucent acrylic	
	Perforated surface is light grey.	
	<i>Specify painted finish for glazed panel frame.</i>	
	<i>Specify trim grey or easy grey integral color for top cap.</i>	
	Linkable screen legs are trim grey.	

# Linkable screens upholstered

Currents

description	type	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
	39"H	18"	2 1/4"	39"	<b>AP1 3918 N()</b> ( )	\$259.	\$287.	\$302.	\$346.	\$360.	\$381.	\$421.	\$441.	\$463.
		24"	2 1/4"	39"	<b>AP1 3924 N()</b> ( )	293.	324.	342.	391.	406.	432.	475.	499.	524.
		30"	2 1/4"	39"	<b>AP1 3930 N()</b> ( )	316.	352.	369.	423.	441.	468.	515.	542.	568.
		36"	2 1/4"	39"	<b>AP1 3936 N()</b> ( )	354.	394.	414.	472.	492.	523.	576.	605.	634.
		42"	2 1/4"	39"	<b>AP1 3942 N()</b> ( )	399.	444.	467.	533.	555.	591.	652.	683.	716.
		48"	2 1/4"	39"	<b>AP1 3948 N()</b> ( )	435.	483.	507.	580.	604.	642.	708.	743.	779.
		60"	2 1/4"	39"	<b>AP1 3960 N()</b> ( )	506.	561.	590.	672.	701.	747.	822.	n/a	n/a
	48"H	18"	2 1/4"	48"	<b>AP1 4818 N()</b> ( )	304.	338.	353.	404.	421.	448.	494.	518.	545.
		24"	2 1/4"	48"	<b>AP1 4824 N()</b> ( )	344.	381.	401.	459.	477.	508.	558.	585.	615.
		30"	2 1/4"	48"	<b>AP1 4830 N()</b> ( )	373.	415.	436.	498.	519.	552.	607.	636.	668.
		36"	2 1/4"	48"	<b>AP1 4836 N()</b> ( )	419.	465.	488.	557.	580.	618.	680.	714.	749.
		42"	2 1/4"	48"	<b>AP1 4842 N()</b> ( )	470.	522.	549.	627.	655.	695.	765.	802.	843.
		48"	2 1/4"	48"	<b>AP1 4848 N()</b> ( )	512.	568.	598.	682.	711.	755.	831.	873.	917.
		60"	2 1/4"	48"	<b>AP1 4860 N()</b> ( )	596.	662.	695.	795.	827.	880.	969.	n/a	n/a
	64"H	18"	2 1/4"	64"	<b>AP1 6418 A()</b> ( )	395.	439.	461.	525.	549.	582.	641.	672.	708.
		24"	2 1/4"	64"	<b>AP1 6424 A()</b> ( )	435.	483.	507.	580.	604.	642.	708.	743.	779.
		30"	2 1/4"	64"	<b>AP1 6430 A()</b> ( )	488.	543.	569.	653.	679.	720.	795.	832.	874.
		36"	2 1/4"	64"	<b>AP1 6436 A()</b> ( )	527.	587.	617.	706.	735.	780.	859.	902.	948.
		42"	2 1/4"	64"	<b>AP1 6442 A()</b> ( )	582.	647.	680.	777.	810.	861.	948.	996.	1,044.
		48"	2 1/4"	64"	<b>AP1 6448 A()</b> ( )	624.	693.	725.	830.	866.	920.	1,013.	1,064.	1,116.
		60"	2 1/4"	64"	<b>AP1 6460 A()</b> ( )	708.	784.	824.	942.	981.	1,042.	1,148.	n/a	n/a

## Order Code

Example:	<b>AP1 3924 N15 813</b>
<b>AP1</b>	Currents screen
<b>39</b>	Height
<b>24</b>	Width
<b>N</b>	Surface type
<b>15</b>	Fabric group
<b>813</b>	Trim color

## Specification Information

*Surface types:*

N	Upholstered
A	High performance acoustical upholstered

*Specify fabric group:*

10	Fabric group 10
15	Fabric group 15
20	Fabric group 20
30	Fabric group 30
35	Fabric group 35
40	Fabric group 40
45	Fabric group 45
50	Fabric group 50
55	Fabric group 55

Specify trim grey or easy grey integral color for top cap.

Linkable screen legs are trim grey.

## Application Notes

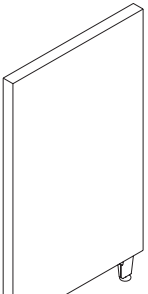
Linkable screens divide workstations perpendicular to service wall where base raceway is not required. Linkable screens connect with standard Morrison/Currents wall starters and Currents linkable screen connectors.

Screens are supported by two legs with leveling glides and include Currents top cap. Specify connectors separately.

Upholstered 39" and 48" screens use Morrison Options panel construction. Upholstered 64" screens use high performance acoustical Morrison panel construction.

# Linkable screens

*marker surface both sides*

description	type	w	d	h	pattern no.	list price
Linkable screens 	48"H	24"	2 1/8"	48"	<b>AP1 4824M( )</b>	\$589.
		30"	2 1/8"	48"	<b>AP1 4830M( )</b>	634.
		36"	2 1/8"	48"	<b>AP1 4836M( )</b>	700.
		42"	2 1/8"	48"	<b>AP1 4842M( )</b>	785.
		48"	2 1/8"	48"	<b>AP1 4848M( )</b>	879.
	64"H	24"	2 1/8"	64"	<b>AP1 6424M( )</b>	667.
		30"	2 1/8"	64"	<b>AP1 6430M( )</b>	757.
		36"	2 1/8"	64"	<b>AP1 6436M( )</b>	860.
		42"	2 1/8"	64"	<b>AP1 6442M( )</b>	956.
		48"	2 1/8"	64"	<b>AP1 6448M( )</b>	1,067.

Screens and add-up panels

**Order Code**

Example: <b>AP1 4824M 813</b>
<b>AP1</b> Currents screen
<b>48</b> Height
<b>24</b> Width
<b>M</b> Surface type
<b>813</b> Trim color

**Specification Information**

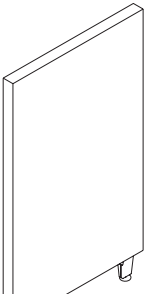
*Surface types:*  
**M** Marker surface  
 Specify trim grey or easy grey integral color for top cap.  
 Linkable screen legs are trim grey.

**Application Notes**

Linkable screens divide workstations perpendicular to service wall where base raceway is not required. Linkable screens connect with standard Morrison/Currents wall starters and Currents linkable screen connectors.  
 Screens are supported by two legs with leveling glides and include Currents top cap. Specify connectors separately.  
 Marker surface linkable screens use Morrison veneer panel construction.

# Linkable screens marker/upholstered combination

Currents

description	type	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
Linkable screens 	48"H	24"	2 1/8"	48"	<b>AP1 4824M()</b> ( )	\$500.	\$523.	\$532.	\$565.	\$575.	\$592.	\$620.	\$633.	\$654.
		30"	2 1/8"	48"	<b>AP1 4830M()</b> ( )	543.	563.	573.	609.	619.	637.	672.	687.	711.
		36"	2 1/8"	48"	<b>AP1 4836M()</b> ( )	597.	623.	630.	672.	683.	708.	742.	761.	787.
		42"	2 1/8"	48"	<b>AP1 4842M()</b> ( )	675.	701.	710.	757.	767.	793.	833.	854.	884.
		48"	2 1/8"	48"	<b>AP1 4848M()</b> ( )	746.	773.	784.	834.	855.	890.	922.	945.	977.
	64"H	24"	2 1/8"	64"	<b>AP1 6424M()</b> ( )	586.	622.	629.	673.	690.	724.	760.	776.	805.
		30"	2 1/8"	64"	<b>AP1 6430M()</b> ( )	659.	700.	707.	757.	773.	806.	841.	862.	892.
		36"	2 1/8"	64"	<b>AP1 6436M()</b> ( )	733.	773.	787.	835.	858.	898.	931.	955.	987.
		42"	2 1/8"	64"	<b>AP1 6442M()</b> ( )	804.	857.	869.	926.	945.	979.	1,021.	1,047.	1,083.
		48"	2 1/8"	64"	<b>AP1 6448M()</b> ( )	917.	973.	986.	1,046.	1,069.	1,108.	1,159.	1,188.	1,227.

## Order Code

Example: **AP1 4824M20 813**

<b>AP1</b>	Currents screen
<b>48</b>	Height
<b>24</b>	Width
<b>M</b>	Surface type
<b>20</b>	Fabric group
<b>813</b>	Trim color

## Specification Information

*Specify fabric group:*

10	Fabric group 10
15	Fabric group 15
20	Fabric group 20
30	Fabric group 30
35	Fabric group 35
40	Fabric group 40
45	Fabric group 45
50	Fabric group 50
55	Fabric group 55

Specify trim grey or easy grey integral color for top cap.

Linkable screen legs are trim grey.

## Application Notes

Linkable screens divide workstations perpendicular to service wall where base raceway is not required. Linkable screens connect with standard Morrison/Currents wall starters and Currents linkable screen connectors.

Screens are supported by two legs with leveling glides and include Currents top cap. Specify connectors separately.

Combination upholstered screens use Morrison veneer/combination panel construction.



# Linkable screens trim

description	type	w	d	h	pattern no.	price
End trim, linkable screens (no connector) 	39" screen	–	2"	39"	<b>AA139E( )</b>	\$37.
	48" screen	–	2"	48"	<b>AA148E( )</b>	38.
	64" screen	–	2"	64"	<b>AA164E( )</b>	39.
Raceway cover for Currents end connector or end trim on Morrison panel					<b>AA1RE( )</b>	24.
Top trim, linkable screens (replacement part) 		6"	2"	–	<b>AA1T06( )</b>	8.
		18"	2"	–	<b>AA1T18( )</b>	11.
		24"	2"	–	<b>AA1T24( )</b>	13.
		30"	2"	–	<b>AA1T30( )</b>	18.
		36"	2"	–	<b>AA1T36( )</b>	20.
		42"	2"	–	<b>AA1T42( )</b>	21.
		48"	2"	–	<b>AA1T48( )</b>	23.
	60"	2"	–	<b>AA1T60( )</b>	26.	
Linkable screen feet, pair (replacement part)					<b>AP1 LF</b>	51.
Carpet grips (set of 10)					<b>MM2-CG</b>	17.
Non-skid pads (set of 10)					<b>AA1NSK</b>	29.

Screens and add-up panels

### Order Code

Example:	<b>AA1 T06 813</b>
<b>AA1 T</b>	Top trim, panel
<b>06</b>	Width
<b>813</b>	Trim color

### Specification Information

*Specify painted finish for raceway cover for Currents end connector.*

Specify trim grey or easy grey integral color for end trim and top trim.

Linkable screen legs are trim grey.

### Application Notes

End trim is economical vertical trim cover for linkable screen where no end connector (or cantilever track) is required. End trim includes top cap.

Raceway cover encloses end of Morrison panel raceway under Currents end trim or end connector.

Top trim corresponds in width to linkable screens or Morrison panels. No Currents top trim is available for Morrison connectors (specify linkable screen connectors).






Top caps are included with Currents screen connectors.

Linkable screen feet may be ordered to convert Morrison panels with raceway to Currents linkable screens.

# Linkable screens

## 90° and end connectors

Currents

description	type	w	d	h	pattern no.	no finish	trim grey
Connector track 	No trim	–	–	39"	<b>MC1-39S1</b>	\$39.	
	No trim	–	–	48"	<b>MC1-48S1</b>	44.	
	No trim	–	–	64"	<b>MC1-64S1</b>	48.	
90° 2-way L 		2"	2"	39"	<b>AC1 39L2( )</b>		126.
		2"	2"	48"	<b>AC1 48L2( )</b>		133.
		2"	2"	64"	<b>AC1 64L2( )</b>		143.
90° 3-way T 		2 1/4"	2"	39"	<b>AC1 39T3( )</b>		160.
		2 1/4"	2"	48"	<b>AC1 48T3( )</b>		169.
		2 1/4"	2"	64"	<b>AC1 64T3( )</b>		182.
90° 4-way X 		2 1/4"	2 1/4"	39"	<b>AC1 39X4( )</b>		188.
		2 1/4"	2 1/4"	48"	<b>AC1 48X4( )</b>		209.
		2 1/4"	2 1/4"	64"	<b>AC1 64X4( )</b>		233.
End connector (with connector track) 		1"	2"	39"	<b>AC1 39E1( )</b>		56.
		1"	2"	48"	<b>AC1 48E1( )</b>		60.
		1"	2"	64"	<b>AC1 64E1( )</b>		67.

### Order Code

Example: <b>AC1 39L2 813</b>
<b>AC1</b> Linkable screen connector
<b>39</b> Height
<b>L2</b> 90° 2-way L
<b>813</b> Trim color

### Specification Information

Specify trim grey or easy grey integral color for top and vertical trim.

Connector post is painted black extrusion.

Carpet grips are black integral color surface.

### Application Notes

Connectors join linkable screens or Morrison panels in straight, 90° or 120° post configurations.

Linkable screen connectors include connector tracks, universal posts and top and vertical trim (where required).

Connector tracks have cantilever slots for worksurface and storage support.

L, T and X connectors include a universal post and 2, 3 or 4 connector tracks and top cap.

End trim may be specified instead of an end connector if cantilever capability is not required.



Carpet grips snap into linkable screen glides to prevent components from sliding. Glide rotates in carpet grip to permit levelling.

Non-skid grips snap into glides to prevent sliding on hard surface floors.

# Linkable screens

## 120° connectors

Currents

description	h	pattern no.	list price
120°, 2-way 	39"	<b>AC1 39V2( )</b>	\$140.
	48"	<b>AC1 48V2( )</b>	146.
	64"	<b>AC1 64V2( )</b>	159.
120°, 3-way 	39"	<b>AC1 39Y3( )</b>	172.
	48"	<b>AC1 48Y3( )</b>	178.
	64"	<b>AC1 64Y3( )</b>	191.

Screens and add-up panels

### Order Code

Example: <b>AC1 39V2 813</b>
<b>AC1</b> Linkable screen connector
<b>39</b> Height
<b>V2</b> 120° 2-way
<b>813</b> Trim color

### Specification Information

Specify trim grey or easy grey integral color for top and vertical trim.

Connector post is painted black extrusion.

Carpet grips are black integral color surface.






### Application Information

Connectors join linkable screens or Morrison panels in straight, 90° or 120° post configurations.

The connectors include connector tracks, a triangular post and top and vertical trim (where required).

# Wall-connected screens *translucent surfaces*

Currents

description	w	d	h	pattern no.	translucent
 39" H wall-connected screen	24"	2"	39"	<b>AF 3924 TCP ( )</b>	\$930.
	36"	2"	39"	<b>AF 3936 TCP ( )</b>	1,009.
	48"	2"	39"	<b>AF 3948 TCP ( )</b>	1,085.
	60"	2"	39"	<b>AF 3960 TCP ( )</b>	1,319.
	72"	2"	39"	<b>AF 3972 TCP ( )</b>	1,550.
 48" H wall-connected screen	24"	2"	48"	<b>AF 4824 TCP ( )</b>	1,085.
	36"	2"	48"	<b>AF 4836 TCP ( )</b>	1,164.
	48"	2"	48"	<b>AF 4848 TCP ( )</b>	1,241.
	60"	2"	48"	<b>AF 4860 TCP ( )</b>	1,474.
	72"	2"	48"	<b>AF 4872 TCP ( )</b>	1,707.
 64" H wall-connected screen	24"	2"	64"	<b>AF 6424 TCP ( )</b>	1,241.
	36"	2"	64"	<b>AF 6436 TCP ( )</b>	1,474.
	48"	2"	64"	<b>AF 6448 TCP ( )</b>	1,707.
	60"	2"	64"	<b>AF 6460 TCP ( )</b>	2,017.
 Screen starter	4"	1"	16"	<b>AA1B( )</b>	130.
 Screen-to-worksurface bracket				<b>AFWB</b>	66.

## Order Code

Example: <b>AF 4872 TCP 612</b>
<b>AF</b> Screen
<b>48</b> Height
<b>72</b> Width
<b>T</b> Surface type
<b>C</b> Surface finish
<b>P</b> Base type
<b>612</b> Base finish

## Specification Information

*Surface types:*  
T Translucent

*Surface finishes:*  
C Crystal

*Specify base and screen starter paint finish.*

*Base type:*  
P Wall-connected

## Application Notes

Translucent screens have full surfaces of luminous fiberglass enclosing a lightweight, rigid frame. Continuous edge trim is trim grey.

Wall connected screens have one support post with levelling glide.

Wall connected screens attach to service wall or Currents T-end only, and cannot be linked.

Specify screen starter to connect screen perpendicular to service wall face. Clamp bracket attaches wall-connected screen anywhere along structural base. Outside surface of screen at end of wall will be approximately 1" from end.



No screen starter is needed to attach service wall-connected screen to corresponding height Currents T-end at end of spine.

Screen-to-worksurface bracket stabilizes wall-connected screen by attaching to underside of worksurface at any height.

Specify left or right end of worksurface.

# Mobile screens

## *translucent and upholstered surfaces*






description	type	w	d	h	pattern no.	non-upholstered									
						10	15	20	30	35	40	45	50	55	
 Mobile screen, translucent	48"H	48"	2"	48"	<b>AF 4848 TCM ( )</b>	\$1,397.									
		60"	2"	48"	<b>AF 4860 TCM ( )</b>	1,629.									
		72"	2"	48"	<b>AF 4872 TCM ( )</b>	1,863.									
	64"H	48"	2"	64"	<b>AF 6448 TCM ( )</b>	1,863.									
		60"	2"	64"	<b>AF 6460 TCM ( )</b>	2,174.									
	 Mobile screen, upholstered	48"H	48"	2"	48"	<b>AF 4848 AM ( )( )</b>	1,341.	1,378.	1,415.	1,491.	1,528.	1,567.	1,602.	1,679.	1,754.
60"			2"	48"	<b>AF 4860 AM ( )( )</b>	1,465.	1,502.	1,541.	1,617.	1,654.	1,691.	1,728.	1,803.	1,880.	
64"H		48"	2"	64"	<b>AF 6448 AM ( )( )</b>	1,455.	1,502.	1,553.	1,654.	1,703.	1,754.	1,803.	1,904.	2,005.	
		60"	2"	64"	<b>AF 6460 AM ( )( )</b>	1,703.	1,754.	1,803.	1,904.	1,954.	2,005.	2,053.	2,154.	2,255.	

Screens and add-up panels

Order Code	Specification Information	Application Notes
Example: <b>AF 4872 TCM 612</b>	<i>Surface types:</i>	Translucent screens have full surfaces of luminous fiberglass enclosing a lightweight, rigid frame. Continuous edge trim is trim grey.
<b>AF</b> Screen	T Translucent	
<b>48</b> Height	A Tackable upholstered	Upholstered screens are tackable, acoustical surface both sides. Continuous edge trim is trim grey.
<b>72</b> Width	<i>Surface finishes:</i>	
<b>T</b> Surface type	C Crystal	The bottom 15" of upholstered mobile screens consists of supporting ballast board and is not tackable area.
<b>C</b> Surface finish	<i>Specify base finish.</i>	
<b>M</b> Base type	<i>Base type:</i>	Mobile screens are supported by stabilizer feet.
<b>612</b> Base finish	M Mobile	
	<i>Specify fabric group:</i>	Non-locking casters to meet BIFMA stability standards.
	10 Fabric group 10	When ordering 60" wide upholstered screens, please check width of fabric selected.
	15 Fabric group 15	
	20 Fabric group 20	
	30 Fabric group 30	
	35 Fabric group 35	
	40 Fabric group 40	
	45 Fabric group 45	
	50 Fabric group 50	
	55 Fabric group 55	

# Add-up panels

*translucent or perforated surface  
service wall crown applications*


description	w	d	h	pattern no.	list price
 12"H add-up panels, translucent fiberglass	24"	2"	12"	<b>AU 1224 TC</b>	\$401.
	36"	2"	12"	<b>AU 1236 TC</b>	459.
	48"	2"	12"	<b>AU 1248 TC</b>	515.
	60"	2"	12"	<b>AU 1260 TC</b>	602.
	72"	2"	12"	<b>AU 1272 TC</b>	687.
 21"H add-up panels, translucent fiberglass	24"	2"	21"	<b>AU 2124 TC</b>	602.
	36"	2"	21"	<b>AU 2136 TC</b>	687.
	48"	2"	21"	<b>AU 2148 TC</b>	773.
	60"	2"	21"	<b>AU 2160 TC</b>	903.
	72"	2"	21"	<b>AU 2172 TC</b>	1,031.
 28"H add-up panels, translucent fiberglass	24"	2"	28"	<b>AU 2824 TC</b>	602.
	36"	2"	28"	<b>AU 2836 TC</b>	687.
	48"	2"	28"	<b>AU 2848 TC</b>	773.
	60"	2"	28"	<b>AU 2860 TC</b>	903.
	72"	2"	28"	<b>AU 2872 TC</b>	1,031.
 12"H add-up panels, perforated	24"	2"	12"	<b>AU 1224 H</b>	613.
	36"	2"	12"	<b>AU 1236 H</b>	701.
	48"	2"	12"	<b>AU 1248 H</b>	791.
	60"	2"	12"	<b>AU 1260 H</b>	920.
	72"	2"	12"	<b>AU 1272 H</b>	1,053.
 21"H add-up panels, perforated	24"	2"	21"	<b>AU 2124 H</b>	920.
	36"	2"	21"	<b>AU 2136 H</b>	1,053.
	48"	2"	21"	<b>AU 2148 H</b>	1,183.
	60"	2"	21"	<b>AU 2160 H</b>	1,381.
	72"	2"	21"	<b>AU 2172 H</b>	1,577.

Order Code	Specification Information	Application Notes																														
Example: <b>AU 2848 TC</b>																																
<b>AU</b> Add up panel	<i>Surface type:</i> TC Translucent fiberglass	Add-up panels add privacy and light control above any height Currents service wall. Bottom edge, with wedge-shape plugs, inserts in center of crown at any point, regardless of upmounted storage. Add-up panels include continuous edge trim.																														
<b>28</b> Height	H Perforated																															
<b>48</b> Width	Perforated panel finish is light grey. Edge trim for add-up panels is integral color trim grey.	Panels add privacy above Fence and any height Currents service wall. Bottom edge inserts in center of crown at any point.																														
<b>T</b> Surface type	Panes are molded translucent finish and are ordered in sets of 4.																															
<b>C</b> Finish																																
		<i>Overall height of service wall with 4" standard crown and Add-up panels:</i> <table border="1"> <thead> <tr> <th>Nominal wall height</th> <th>Add-up height</th> <th>Overall height</th> </tr> </thead> <tbody> <tr><td>39"</td><td>12"</td><td>55"</td></tr> <tr><td>39"</td><td>21"</td><td>64"</td></tr> <tr><td>39"</td><td>28"</td><td>71"</td></tr> <tr><td>48"</td><td>12"</td><td>64"</td></tr> <tr><td>48"</td><td>21"</td><td>73"</td></tr> <tr><td>48"</td><td>28"</td><td>80"</td></tr> <tr><td>64"</td><td>12"</td><td>80"</td></tr> <tr><td>64"</td><td>21"</td><td>89"</td></tr> <tr><td>64"</td><td>28"</td><td>96"</td></tr> </tbody> </table>	Nominal wall height	Add-up height	Overall height	39"	12"	55"	39"	21"	64"	39"	28"	71"	48"	12"	64"	48"	21"	73"	48"	28"	80"	64"	12"	80"	64"	21"	89"	64"	28"	96"
Nominal wall height	Add-up height	Overall height																														
39"	12"	55"																														
39"	21"	64"																														
39"	28"	71"																														
48"	12"	64"																														
48"	21"	73"																														
48"	28"	80"																														
64"	12"	80"																														
64"	21"	89"																														
64"	28"	96"																														

# Add-up panels

*translucent or perforated surface*  
*service wall crown applications*

description	w	d	h	pattern no.	list price
panes (set of 4)	12"	1 3/4"	12"	<b>AU 1212 T 4</b>	\$298.






Order Code	Specification Information	Application Notes
Example: <b>AU 2848 TC</b>	<i>Surface type:</i>	Add-up panels add privacy and light control above any height Currents service wall. Bottom edge, with wedge-shape plugs, inserts in center of crown at any point, regardless of upmounted storage. Add-up panels include continuous edge trim.
<b>AU</b> Add up panel	TC Translucent fiberglass	
<b>28</b> Height	H Perforated	Panels add privacy above Fence and any height Currents service wall.
<b>48</b> Width	Perforated panel finish is light grey. Edge trim for add-up panels is integral color trim grey.	
<b>T</b> Surface type	Panes are molded translucent finish and are ordered in sets of 4.	Bottom edge inserts in center of crown at any point.
<b>C</b> Finish		

<i>Overall height of service wall with 4" standard crown and Add-up panels:</i>		
Nominal wall height	Add-up height	Overall height
39"	12"	55"
39"	21"	64"
39"	28"	71"
48"	12"	64"
48"	21"	73"
48"	28"	80"
64"	12"	80"
64"	21"	89"
64"	28"	96"

Add-up panels  
*upholstered surface*  
*service wall crown applications*

description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
 12"H add-up panels	24"	2"	12"	<b>AU 1224 A ( )</b>	\$351.	\$366.	\$379.	\$405.	\$419.	\$431.	\$445.	\$471.	\$496.
	36"	2"	12"	<b>AU 1236 A ( )</b>	405.	419.	431.	458.	471.	483.	496.	522.	550.
	48"	2"	12"	<b>AU 1248 A ( )</b>	458.	471.	483.	510.	522.	535.	550.	575.	601.
	60"	2"	12"	<b>AU 1260 A ( )</b>	535.	550.	562.	589.	601.	615.	626.	653.	680.
 21"H add-up panels	24"	2"	21"	<b>AU 2124 A ( )</b>	437.	458.	476.	516.	535.	556.	575.	615.	653.
	36"	2"	21"	<b>AU 2136 A ( )</b>	504.	522.	542.	581.	601.	621.	642.	680.	718.
	48"	2"	21"	<b>AU 2148 A ( )</b>	567.	589.	608.	647.	667.	685.	706.	745.	784.
	60"	2"	21"	<b>AU 2160 A ( )</b>	667.	685.	706.	745.	765.	784.	803.	842.	883.
 28"H add-up panels	24"	2"	28"	<b>AU 2824 A ( )</b>	522.	550.	575.	626.	653.	680.	706.	759.	809.
	36"	2"	28"	<b>AU 2836 A ( )</b>	601.	626.	653.	706.	733.	759.	784.	835.	888.
	48"	2"	28"	<b>AU 2848 A ( )</b>	680.	706.	733.	784.	809.	835.	862.	915.	967.
	60"	2"	28"	<b>AU 2860 A ( )</b>	797.	823.	851.	901.	927.	955.	980.	1,033.	1,085.

**Order Code**

Example:	<b>AU 2848 A20</b>
<b>AU</b>	Add up panel
<b>28</b>	Height
<b>48</b>	Width
<b>A</b>	Surface type
<b>20</b>	Fabric group

**Specification Information**

*Surface types:*  
 A Tackable upholstered  
*Specify fabric group for upholstered add-up panels:*  
 10 Fabric group 10  
 15 Fabric group 15  
 20 Fabric group 20  
 30 Fabric group 30  
 35 Fabric group 35  
 40 Fabric group 40  
 45 Fabric group 45  
 50 Fabric group 50  
 55 Fabric group 55  
 Edge trim is integral color trim grey finish.




**Application Notes**

Add-up panels add visual and acoustical privacy above any height Currents service wall. Bottom edge, with wedge-shape plugs, inserts in center of crown at any point, regardless of upmounted storage. Add-up panels include continuous edge trim.  
 Upholstered add-up panels have been tested to NRC .60 and STC 21.  
 When ordering 60" wide panels, please check width of fabric selected.

*Overall height of service wall with 4" standard crown and Add-up panels:*

Nominal wall height	Add-up height	Overall height
39"	12"	55"
39"	21"	64"
39"	28"	71"
48"	12"	64"
48"	21"	73"
48"	28"	80"
64"	12"	80"
64"	21"	89"
64"	28"	96"



description	type	width	depth	height	pattern number	clear tempered	powder
Add up panels	frameless glass, 8"h 	24"	1/2"	8"	<b>AUA1 0824 G ( )</b>	\$220.	\$270.
		36"	1/2"	8"	<b>AUA1 0836 G ( )</b>	250.	360.
		48"	1/2"	8"	<b>AUA1 0848 G ( )</b>	325.	450.
		60"	1/2"	8"	<b>AUA1 0860 G ( )</b>	400.	580.
		72"	1/2"	8"	<b>AUA1 0872 G ( )</b>	450.	700.
	frameless glass, 12"h 	24"	1/2"	12"	<b>AUA1 1224 G ( )</b>	265.	275.
		36"	1/2"	12"	<b>AUA1 1236 G ( )</b>	371.	387.
		48"	1/2"	12"	<b>AUA1 1248 G ( )</b>	477.	497.
		60"	1/2"	12"	<b>AUA1 1260 G ( )</b>	583.	607.
		72"	1/2"	12"	<b>AUA1 1272 G ( )</b>	690.	717.
	frameless glass, 15"h 	24"	1/2"	15"	<b>AUA1 1524 G ( )</b>	270.	473.
		36"	1/2"	15"	<b>AUA1 1536 G ( )</b>	375.	525.
		48"	1/2"	15"	<b>AUA1 1548 G ( )</b>	480.	755.
		60"	1/2"	15"	<b>AUA1 1560 G ( )</b>	590.	850.
		72"	1/2"	15"	<b>AUA1 1572 G ( )</b>	695.	995.

Screens and add-up panels

Order Code	Specification Information	Application Notes
Example: <b>AUA1 1248 G TEMP</b> <b>AUA1</b> Autostrada add up panel <b>12</b> Height <b>48</b> Width <b>G</b> Type <b>TEMP</b> Finish	Add up type: G Glass  Glass add-ups are available with the following glass options: TEMP Clear tempered GL13 Powder	Add-up panels add acoustical privacy and light control above any height spine wall.  Anodized aluminum base frame inserts in center of any spine crown and is secured by bolts within crown.  Frameless glass add-ups can be positioned at any 3" increment in standard or compact crown with any cover type.
		Any height add up can be used on any height AutoStrada spine or Currents service wall or fence. <ul style="list-style-type: none"> <li>• 8"h Add ups are designed primarily for use on 39"h spine with 1"h crown to create a 48"h horizon.</li> <li>• 12"h Add ups are designed for use on 48"h spine for a 61" horizon with 1"h crown or a 64" horizon with 4"h crown.</li> <li>• 15"h Add ups are designed primarily for use on 48"h spine with 1"h crown for a 64" horizon.</li> </ul>

# Add-up panel connectors and fillers

## *field retrofit kits*

Currents

description	type	pattern no.	list price
Field Retrofit Trim Kit for non-stackable add-up panels	12 x 24	<b>AUA1224</b>	n/c
	12 x 36	<b>AUA1236</b>	n/c
	12 x 48	<b>AUA1248</b>	n/c
	12 x 60	<b>AUA1260</b>	n/c
	12 x 72	<b>AUA1272</b>	n/c
	21 x 24	<b>AUA2124</b>	n/c
	21 x 36	<b>AUA2136</b>	n/c
	21 x 48	<b>AUA2148</b>	n/c
	21 x 60	<b>AUA2160</b>	n/c
	21 x 72	<b>AUA2172</b>	n/c
	28 x 24	<b>AUA2824</b>	n/c
	28 x 36	<b>AUA2836</b>	n/c
	28 x 48	<b>AUA2848</b>	n/c
	28 x 60	<b>AUA2860</b>	n/c
	28 x 72	<b>AUA2872</b>	n/c

### Order Code

Example: **AUA1224**

**AU** Add-up

**A** Type

**12** Height

**24** Width

### Specification Information

Finish is trim grey.






Fillers require retrofitting add-up panels with new trim.

Retrofit trim kits are no-charge (n/c) items specified separately.

# Add-up panel connectors and fillers

## *service wall applications*

Currents

description	w	d	h	pattern no.	list price
Straight alignment clip 	3"	2"	–	<b>AU1 CS</b>	\$10.
L connector add-up fillers 	6"	6"	16"	<b>AU1 CL12</b>	302.
	6"	6"	25"	<b>AU1 CL21</b>	361.
	6"	6"	32"	<b>AU1 CL28</b>	422.
T connector add-up fillers 	6"	6"	16"	<b>AU1 CT12</b>	302.
	6"	6"	25"	<b>AU1 CT21</b>	361.
	6"	6"	32"	<b>AU1 CT28</b>	422.
T-end 1 1/8" extension fillers 	2"	1 1/8"	16"	<b>AU1 X112</b>	181.
	2"	1 1/8"	25"	<b>AU1 X121</b>	210.
	2"	1 1/8"	32"	<b>AU1 X128</b>	241.
T-end 3 1/2" extension fillers 	2"	3 1/2"	16"	<b>AU1 X312</b>	241.
	2"	3 1/2"	25"	<b>AU1 X321</b>	271.
	2"	3 1/2"	32"	<b>AU1 X328</b>	302.

Screens and add-up panels

### Order Code

Example:	<b>AU1 CL12</b>
<b>AU1</b>	Add-up
<b>CL</b>	Connector type
<b>12</b>	Application

### Specification Information

Add-up fillers and alignment clip are painted trim grey finish.

Pattern numbers correspond to add-up panel height.



### Application Notes

Straight connector clips over adjacent non-stackable add-up panels.

Add-up fillers join between add-up panels over a service wall connection or a T-end to extend enclosure from bottom of crown to top of add-up. Fillers require retrofitting add-up panels with new trim.

Retrofit kits are no-charge items that are specified separately.

Stackable add-up panels  
glazed, translucent fiberglass, perforated, and marker surface  
first up panels

description	w	d	h	pattern no.	acrylic W (C,S)	acrylic W (T)	fiberglass (TC)	perforated (H)	marker (M)	
First up panel on service wall crown 	24"	2"	12"	<b>AY1 1224C( )</b>	\$501.	\$546.	\$584.	\$767.	\$523.	
	36"	2"	12"	<b>AY1 1236C( )</b>	582.	635.	689.	944.	608.	
	48"	2"	12"	<b>AY1 1248C( )</b>	664.	726.	813.	1,138.	721.	
	60"	2"	12"	<b>AY1 1260C( )</b>	710.	779.	930.	1,352.	n/a	
	24"	2"	21"	<b>AY1 2124C( )</b>	545.	592.	625.	853.	589.	
	36"	2"	21"	<b>AY1 2136C( )</b>	634.	695.	748.	1,060.	687.	
	48"	2"	21"	<b>AY1 2148C( )</b>	724.	797.	883.	1,294.	821.	
	60"	2"	21"	<b>AY1 2160C( )</b>	827.	910.	1,014.	1,541.	n/a	
	24"	2"	28"	<b>AY1 2824C( )</b>	755.	830.	742.	1,022.	630.	
	36"	2"	28"	<b>AY1 2836C( )</b>	895.	985.	883.	1,281.	740.	
	48"	2"	28"	<b>AY1 2848C( )</b>	1,035.	1,142.	1,060.	1,573.	882.	
	60"	2"	28"	<b>AY1 2860C( )</b>	1,123.	1,235.	1,222.	1,880.	n/a	
	First up panel on linkable screen or Morrison panel 	18"	2"	16"	<b>AY1 1618M( )</b>	472.	513.	n/a	n/a	n/a
		24"	2"	16"	<b>AY1 1624M( )</b>	513.	557.	779.	1,099.	549.
30"		2"	16"	<b>AY1 1630M( )</b>	555.	606.	n/a	n/a	590.	
36"		2"	16"	<b>AY1 1636M( )</b>	599.	655.	944.	1,398.	639.	
42"		2"	16"	<b>AY1 1642M( )</b>	638.	698.	n/a	n/a	692.	
48"		2"	16"	<b>AY1 1648M( )</b>	681.	746.	1,131.	1,748.	760.	
60"		2"	16"	<b>AY1 1660M( )</b>	740.	806.	1,307.	2,067.	n/a	
18"		2"	25"	<b>AY1 2518M( )</b>	601.	657.	n/a	n/a	n/a	
24"		2"	25"	<b>AY1 2524M( )</b>	657.	718.	813.	1,165.	611.	
30"		2"	25"	<b>AY1 2530M( )</b>	714.	783.	n/a	n/a	663.	
36"		2"	25"	<b>AY1 2536M( )</b>	772.	850.	982.	1,489.	716.	
42"		2"	25"	<b>AY1 2542M( )</b>	829.	912.	n/a	n/a	785.	
48"		2"	25"	<b>AY1 2548M( )</b>	889.	978.	1,183.	1,866.	855.	
60"		2"	25"	<b>AY1 2560M( )</b>	946.	1,039.	1,373.	2,209.	n/a	

**Order Code**

Example:	<b>AY1 1636M WC 117</b>
<b>AY1</b>	Stackable add-up
<b>16</b>	Height
<b>36</b>	Width
<b>M</b>	Mounting kit
<b>W</b>	Surface type
<b>C</b>	Acrylic finish
<b>117</b>	Frame finish

**Specification Information**

Top and edge trim are trim grey.

*Specify surface type.*

W	Glazed
TC	Translucent fiberglass
H	perforated (light metallic grey only)
M	Marker surface (both sides)

*For glazed panels specify acrylic:*

C	Clear tempered glass
S	Smoked acrylic
T	Translucent acrylic

*For glazed panels also specify frame finish.*


**Application Notes**

Stackable add-up panels provide adaptable privacy on service walls, linkable screens or Morrison panels. First up panels include top and edge trims and bayonet supports that bolt on to Currents service wall frame or top of screen or panel. All stackable add-up panels may be removed without tools.

Specify trim caps and connectors separately.

Stackable add-up panels  
*glazed, translucent fiberglass, perforated, and marker surface*  
*next up panels*

description	w	d	h	pattern no.	acrylic W (C,S)	acrylic W (T)	fiberglass (TC)	perforated (H)	marker (M)
Next up panel on stackable add-up panels	18"	2"	16"	<b>AY1 1618S( )</b>	\$472.	\$513.	n/a	n/a	n/a
	24"	2"	16"	<b>AY1 1624S( )</b>	513.	557.	779.	1,099.	549.
	30"	2"	16"	<b>AY1 1630S( )</b>	555.	606.	n/a	n/a	590.
	36"	2"	16"	<b>AY1 1636S( )</b>	599.	655.	944.	1,398.	639.
	42"	2"	16"	<b>AY1 1642S( )</b>	638.	698.	n/a	n/a	692.
	48"	2"	16"	<b>AY1 1648S( )</b>	681.	746.	1,131.	1,748.	760.
	60"	2"	16"	<b>AY1 1660S( )</b>	740.	806.	1,307.	2,067.	n/a



Screens and add-up panels

**Order Code**

Example: <b>AY1 1636S WC 117</b>
<b>AY1</b> Stackable add-up
<b>16</b> Height
<b>36</b> Width
<b>S</b> Mounting kit
<b>W</b> Surface type
<b>C</b> Acrylic finish
<b>117</b> Frame finish

**Specification Information**

Top and edge trim are trim grey.  
*Specify surface type.*  
 W Glazed  
 TC Translucent fiberglass  
 H perforated (light grey only)  
 M Marker surface (both sides)

*For glazed panels specify acrylic:*  
 C Clear tempered glass  
 S Smoked acrylic  
 T Translucent acrylic


*For glazed panels also specify frame finish.*


**Application Notes**

Stackable add-up panels provide adaptable privacy on service walls, linkable screens or Morrison panels. Next up panels include intermediate masts that engage into sides of corresponding width first up or next-up panels. All stackable add-up panels may be removed without tools.

Specify trim caps and connectors separately.

Stackable add-up panels  
upholstered  
first up panels

description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
 First up panel on service wall crown	24"	2 1/4"	12"	<b>AY1 1224C A()</b>	\$392.	\$423.	\$431.	\$474.	\$496.	\$527.	\$557.	\$579.	\$608.
	36"	2 1/4"	12"	<b>AY1 1236C A()</b>	456.	497.	507.	560.	587.	628.	666.	694.	730.
	48"	2 1/4"	12"	<b>AY1 1248C A()</b>	529.	582.	598.	662.	693.	743.	793.	825.	870.
	60"	2 1/4"	12"	<b>AY1 1260C A()</b>	595.	654.	668.	745.	780.	838.	896.	934.	986.
	24"	2 1/4"	21"	<b>AY1 2124C A()</b>	428.	466.	475.	523.	549.	583.	621.	643.	679.
	36"	2 1/4"	21"	<b>AY1 2136C A()</b>	503.	550.	561.	624.	654.	698.	745.	774.	817.
	48"	2 1/4"	21"	<b>AY1 2148C A()</b>	589.	647.	663.	741.	774.	831.	886.	925.	977.
	60"	2 1/4"	21"	<b>AY1 2160C A()</b>	661.	726.	746.	833.	876.	942.	1,006.	1,051.	1,110.

description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
 First up panel on linkable screen or Morrison Panel	18"	2 1/4"	16"	<b>AY1 1618M A()</b>	383.	417.	424.	468.	487.	519.	550.	571.	600.
	24"	2 1/4"	16"	<b>AY1 1624M A()</b>	404.	439.	444.	492.	514.	549.	580.	603.	633.
	30"	2 1/4"	16"	<b>AY1 1630M A()</b>	439.	478.	488.	540.	563.	603.	638.	663.	698.
	36"	2 1/4"	16"	<b>AY1 1636M A()</b>	471.	515.	525.	582.	611.	655.	695.	722.	763.
	42"	2 1/4"	16"	<b>AY1 1642M A()</b>	518.	567.	580.	646.	677.	723.	773.	804.	851.
	48"	2 1/4"	16"	<b>AY1 1648M A()</b>	552.	606.	621.	689.	721.	775.	826.	860.	909.
	60"	2 1/4"	16"	<b>AY1 1660M A()</b>	618.	680.	697.	776.	816.	877.	936.	976.	1,031.
	18"	2 1/4"	25"	<b>AY1 2518M A()</b>	420.	457.	467.	515.	539.	575.	608.	632.	665.
	24"	2 1/4"	25"	<b>AY1 2524M A()</b>	443.	483.	494.	545.	569.	607.	644.	669.	707.
	30"	2 1/4"	25"	<b>AY1 2530M A()</b>	483.	527.	540.	598.	626.	668.	712.	742.	780.
	36"	2 1/4"	25"	<b>AY1 2536M A()</b>	520.	571.	582.	647.	679.	726.	775.	806.	853.
	42"	2 1/4"	25"	<b>AY1 2542M A()</b>	574.	630.	644.	719.	753.	812.	865.	902.	953.
	48"	2 1/4"	25"	<b>AY1 2548M A()</b>	612.	672.	691.	771.	806.	867.	925.	966.	1,022.
	60"	2 1/4"	25"	<b>AY1 2560M A()</b>	687.	757.	777.	870.	913.	983.	1,052.	1,095.	1,159.

Order Code

Example:	<b>AY1 1660M A20</b>
<b>AY1</b>	Stackable panel
<b>16</b>	Height
<b>60</b>	Width
<b>M</b>	Mounting kit
<b>A</b>	Surface type
<b>20</b>	Fabric group

Specification Information

Top and trim edge are trim grey.

Surface type:  
A Tackable upholstered

Specify fabric group:

10	Fabric group 10
15	Fabric group 15
20	Fabric group 20
30	Fabric group 30
35	Fabric group 35
40	Fabric group 40
45	Fabric group 45
50	Fabric group 50
55	Fabric group 55

Application Notes

Stackable add-up panels provide adaptable privacy on service walls, linkable screens or Morrison panels. First up panels include top and edge trims and bayonet supports that bolt on to Currents service wall frame or top of screen or panel. All stackable add-up panels may be removed without tools.


Stackable add-up panels  
*upholstered*  
*next up panels*


description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
Next up panel on stackable add-up panels	18"	2 1/4"	16"	<b>AY1 1618S A()</b>	\$383.	\$417.	\$424.	\$468.	\$487.	\$519.	\$550.	\$571.	\$600.
	24"	2 1/4"	16"	<b>AY1 1624S A()</b>	404.	439.	447.	492.	514.	549.	580.	603.	633.
	30"	2 1/4"	16"	<b>AY1 1630S A()</b>	439.	478.	488.	540.	563.	603.	638.	663.	698.
	36"	2 1/4"	16"	<b>AY1 1636S A()</b>	471.	515.	525.	582.	611.	655.	695.	722.	763.
	42"	2 1/4"	16"	<b>AY1 1642S A()</b>	518.	567.	580.	646.	677.	723.	773.	804.	851.
	48"	2 1/4"	16"	<b>AY1 1648S A()</b>	552.	606.	621.	689.	721.	775.	826.	860.	909.
	60"	2 1/4"	16"	<b>AY1 1660S A()</b>	618.	680.	697.	776.	816.	877.	936.	976.	1,031.



Order Code	Specification Information	Application Notes
Example: <b>AY1 1660S A20</b>	Top and trim edge are trim grey.	Stackable add-up panels provide adaptable privacy on service walls, linkable screens or Morrison panels. Next up panels include intermediate masts that engage into sides of corresponding width first up or next-up panels. All stackable add-up panels may be removed without tools.
<b>AY1</b> Stackable panel	<i>Surface type:</i>	
<b>16</b> Height	A Tackable upholstered	
<b>60</b> Width	<i>Specify fabric group:</i>	
<b>S</b> Mounting kit	10 Fabric group 10	
<b>A</b> Surface type	15 Fabric group 15	
<b>20</b> Fabric group	20 Fabric group 20	
	30 Fabric group 30	
	35 Fabric group 35	
	40 Fabric group 40	
	45 Fabric group 45	
	50 Fabric group 50	
	55 Fabric group 55	

Stackable add-up connectors and fillers  
*stackable add-up panels or  
 Morrison panels perpendicular to service wall*

description	type	w	d	h	pattern no.	list price
Crown fillers for stackable add-up panels perpendicular to service wall 	First up	2"	2"	16"	<b>AY1 PC16</b>	\$193.
	First up	2"	2"	25"	<b>AY1 PC25</b>	205.
	First up	2"	2"	32"	<b>AY1 PC32</b>	216.
	Next up	2"	2"	16"	<b>AY1 SPC16</b>	181.

Crown fillers for Morrison perpendicular to service wall 		2 1/4"	2 1/4"	16"	<b>AU1 PC12( )</b>	120.
		2 1/4"	2 1/4"	25"	<b>AU1 PC21( )</b>	151.
		2 1/4"	2 1/4"	32"	<b>AU1 PC28( )</b>	181.

Order Code	
Example: <b>AU1 PC12 613</b>	
<b>AU1</b>	Add-up panel
<b>PC</b>	Crown filler
<b>12</b>	Height
<b>613</b>	Finish

**Specification Information**  
*Specify finish for vertical cover and top cap.*






**Application Notes**  
 Crown fillers extend from stackable add-up panel or Morrison panel or add-on panel connector to surface of crown-mounted add-up panels.  
 Specify connector separately.  
 Crown filler includes top cap.



# Stackable add-up connectors and fillers

## *crown and linkable screen applications*

Currents

description	type	w	d	h	pattern no.	price
Trim caps 	End cap				<b>AY1 CE</b>	\$5.
	Straight cap	2"	2"	–	<b>AY1 CS</b>	5.
Corner first up stackable connectors over linkable screens 		2"	2"	16"	<b>AY1 LL16</b>	181.
		2"	2"	25"	<b>AY1 LL25</b>	205.
		2"	2"	32"	<b>AY1 LL32</b>	229.
Corner next up stackable connectors over linkable screens 		2"	2"	16"	<b>AY1 SL16</b>	216.
T first up stackable connectors over linkable screens 		2"	2"	16"	<b>AY1 LT16</b>	229.
		2"	2"	25"	<b>AY1 LT25</b>	253.
		2"	2"	32"	<b>AY1 LT32</b>	277.
T next up stackable connectors over linkable screens 		2"	2"	16"	<b>AY1 ST16</b>	265.





Screens and add-up panels

Order Code	Specification Information	Application Notes
Example: <b>AY1 LL16</b>	Connector caps and connector trims are integral color trim grey.	Trim caps are specified by application to fill top corners of stackable add-up panels. Straight cap aligns adjacent add-up panels. End cap finishes the end of a run of add-up panels.
<b>AY1</b> Stackable add-up		
<b>L</b> Screen application		
<b>L</b> Configuration		
<b>16</b> Height		
		Stackable connectors join stackable add-up panels over a linkable screen connector. Next up connectors correspond to next up panels.

# Stackable add-up connectors and fillers

## *crown and linkable screen applications*

Currents

description	type	w	d	h	pattern no.	price
 X first up stackable connectors over linkable screens		2"	2"	16"	<b>AY1 LX16</b>	\$265.
		2"	2"	25"	<b>AY1 LX25</b>	302.
		2"	2"	32"	<b>AY1 LX32</b>	326.
 X next up stackable connectors over linkable screens - X next up		2"	2"	16"	<b>AY1 SX16</b>	302.
 First up straight post		2"	2"	16"	<b>AY1 LP16</b>	205.
		2"	2"	25"	<b>AY1 LP25</b>	229.
		2"	2"	32"	<b>AY1 LP32</b>	253.
 Next up straight post		2"	2"	16"	<b>AY1 SP16</b>	241.






Order Code	Specification Information	Application Notes
Example: <b>AY1 LL16</b>	Connector caps and connector trims are integral color trim grey.	Trim caps are specified by application to fill top corners of stackable add-up panels. Straight cap aligns adjacent add-up panels. End cap finishes the end of a run of add-up panels.
<b>AY1</b> Stackable add-up		
<b>L</b> Screen application		
<b>L</b> Configuration		
<b>16</b> Height		
		Stackable connectors join stackable add-up panels over a linkable screen connector. Next up connectors correspond to next up panels.

# Stackable add-up connectors and fillers

## service wall, T-end and linkable screen applications

Currents

Screens and add-up panels

description	type	w	d	h	pattern no.	list price
 Stackable accessories	Crown-mount masts (replacement)				<b>AY1 CMK</b>	\$49.
	High-low adapter kit				<b>AY1 HLA</b>	60.
	Linkable screen masts (replacement)				<b>AY1 MMK</b>	49.
	Stacking hardware kit (replacement)				<b>AY1 SMK</b>	35.
 90° 2-way L first up corner fillers		6"	6"	16"	<b>AY1 CL12</b>	361.
		6"	6"	25"	<b>AY1 CL21</b>	422.
		6"	6"	32"	<b>AY1 CL28</b>	482.
 90° 2-way L next up corner fillers		6"	6"	16"	<b>AY1 SCL16</b>	398.
 90° 3-way T corner fillers		7"	6"	16"	<b>AY1 CT12</b>	422.
		7"	6"	25"	<b>AY1 CT21</b>	482.
		7"	6"	32"	<b>AY1 CT28</b>	543.
 90° 3-way T next up corner fillers		7"	6"	16"	<b>AY1 SCT16</b>	458.

### Order Code

Example: <b>AY1 CL28</b>	
<b>AY1</b>	Stackable add-up
<b>CL</b>	Connector type
<b>28</b>	Height

### Specification Information

Stackable add-up fillers and trim are trim grey finish.

### Application Notes

Hi-low adapter kit includes an end cap and a bayonet with attachment holes to join stackable add-up panels in a straight high/low configuration. The adapter also adapts a corner, T, or X post for high/low corner configurations.

Corner fillers join stackable add-ups and fill the space above a Currents service wall L or T connection.

T-end extension fillers fill the 1 1/8" or 3 1/2" space above the extending area of a T-end connection at the end of a service wall with stackable add-up panels.







T-end stackable fillers fill the 7"-wide space above a T-end when attached linkable screens or Morrison panels have stackable add-ups.

All fillers engage into the top corners of corresponding height stackable add-up panels.

# Stackable add-up connectors and fillers

## service wall, T-end and linkable screen applications

Currents

description	type	w	d	h	pattern no.	list price
 90° 4-way X corner fillers		7"	7"	16"	<b>AY1 CX12</b>	\$482.
		7"	7"	25"	<b>AY1 CX21</b>	543.
		7"	7"	32"	<b>AY1 CX28</b>	602.
 90° 4-way next up corner fillers		7"	7"	16"	<b>AY1 SCX16</b>	518.
 First up, T-end extension fillers	1" extension	1"	2"	16"	<b>AY1 X112</b>	168.
	1" extension	1"	2"	25"	<b>AY1 X121</b>	181.
	1" extension	1"	2"	32"	<b>AY1 X128</b>	193.
	3 1/2" extension	3 1/2"	2"	16"	<b>AY1 X312</b>	181.
	3 1/2" extension	3 1/2"	2"	25"	<b>AY1 X321</b>	193.
	3 1/2" extension	3 1/2"	2"	32"	<b>AY1 X328</b>	205.
 Next up 1" fillers		1"	2"	16"	<b>AY1 SX116</b>	181.
 Next up 3 1/2" fillers		3 1/2"	2"	16"	<b>AY1 SX316</b>	193.
 T-end stackable fillers	First up	7"	2"	16"	<b>AY1 AXT16</b>	253.
	First up	7"	2"	25"	<b>AY1 AXT25</b>	277.
	First up	7"	2"	32"	<b>AY1 AXT32</b>	302.
	Next up	7"	2"	16"	<b>AY1 AXST16</b>	253.

### Order Code

Example: <b>AY1 CL28</b>	
<b>AY1</b>	Stackable add-up
<b>CL</b>	Connector type
<b>28</b>	Height

### Specification Information

Stackable add-up fillers and trim are trim grey finish.

### Application Notes

Hi-low adapter kit includes an end cap and a bayonet with attachment holes to join stackable add-up panels in a straight high/low configuration. The adapter also adapts a corner, T, or X post for high/low corner configurations.

Corner fillers join stackable add-ups and fill the space above a Currents service wall L or T connection.





T-end extension fillers fill the 1 1/8" or 3 1/2" space above the extending area of a T-end connection at the end of a service wall with stackable add-up panels.

T-end stackable fillers fill the 7"-wide space above a T-end when attached linkable screens or Morrison panels have stackable add-ups.

All fillers engage into the top corners of corresponding height stackable add-up panels.

Worksurfaces, universal  
straight, curved and flat front  
1 3/4" wire drop

Currents

description	w	d	h	pattern no.	lam.	V2	V3
24"D straight worksurface, curved front 	24"	22 1/4"	1"	<b>AW1 S2424 ( )</b>	\$243.	\$364.	\$487.
	30"	22 1/4"	1"	<b>AW1 S3024 ( )</b>	268.	401.	536.
	36"	22 1/4"	1"	<b>AW1 S3624 ( )</b>	291.	439.	584.
	42"	22 1/4"	1"	<b>AW1 S4224 ( )</b>	317.	475.	633.
	48"	22 1/4"	1"	<b>AW1 S4824 ( )</b>	341.	511.	681.
	60"	22 1/4"	1"	<b>AW1 S6024 ( )</b>	389.	584.	780.
	66"	22 1/4"	1"	<b>AW1 S6624 ( )</b>	414.	620.	827.
	72"	22 1/4"	1"	<b>AW1 S7224 ( )</b>	439.	656.	876.
	84"	22 1/4"	1"	<b>AW1 S8424 ( )</b>	487.	730.	973.
30"D straight worksurface, curved front 	36"	28 1/4"	1"	<b>AW1 S3630 ( )</b>	329.	493.	656.
	48"	28 1/4"	1"	<b>AW1 S4830 ( )</b>	376.	566.	755.
	60"	28 1/4"	1"	<b>AW1 S6030 ( )</b>	439.	656.	876.
	72"	28 1/4"	1"	<b>AW1 S7230 ( )</b>	511.	765.	1,022.
	84"	28 1/4"	1"	<b>AW1 S8430 ( )</b>	586.	877.	1,170.
24"D Straight worksurface, flat front 	24"	22 1/4"	1"	<b>AW1 F2424 ( )</b>	243.	364.	487.
	30"	22 1/4"	1"	<b>AW1 F3024 ( )</b>	268.	401.	536.
	36"	22 1/4"	1"	<b>AW1 F3624 ( )</b>	291.	439.	584.
	42"	22 1/4"	1"	<b>AW1 F4224 ( )</b>	317.	475.	633.
	48"	22 1/4"	1"	<b>AW1 F4824 ( )</b>	341.	511.	681.
	60"	22 1/4"	1"	<b>AW1 F6024 ( )</b>	389.	584.	780.
	66"	22 1/4"	1"	<b>AW1 F6624 ( )</b>	414.	620.	827.
	72"	22 1/4"	1"	<b>AW1 F7224 ( )</b>	439.	656.	876.
	84"	22 1/4"	1"	<b>AW1 F8424 ( )</b>	487.	730.	973.
30"D straight worksurface, flat front 	36"	28 1/4"	1"	<b>AW1 F3630 ( )</b>	329.	493.	656.
	48"	28 1/4"	1"	<b>AW1 F4830 ( )</b>	376.	566.	755.
	60"	28 1/4"	1"	<b>AW1 F6030 ( )</b>	439.	656.	876.
	72"	28 1/4"	1"	<b>AW1 F7230 ( )</b>	511.	765.	1,022.
	84"	28 1/4"	1"	<b>AW1 F8430 ( )</b>	586.	877.	1,170.

Worksurfaces

**Order Code**

Example: **AW1 S4830 117**

<b>AW1</b>	Worksurface
<b>S</b>	Straight
<b>48</b>	Width
<b>30</b>	Depth
<b>117</b>	Top finish

**Specification Information**

Worksurface edges are trim grey.  
Specify top finish

**Application Notes**

Worksurfaces may be end-supported, cantilevered from Currents service wall, or supported by C-leg or pedestal at each end. Universal worksurfaces are interchangeable with Currents desks. Specify supports separately.

Straight worksurfaces have a 1"D curved front for additional surface area, or a flat front. Flat front allows two straight worksurfaces to meet at right angles.

24"D straight worksurfaces may be cantilevered with two cantilever brackets.

24" and 30"D straight worksurfaces may be end supported with two Currents end support brackets.


Universal straight worksurfaces 36" wide and greater include a steel stiffener that doubles as a horizontal cable manager.

# Worksurfaces, universal

Currents

corner




1 3/4" wire drop

description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces 	42"	42"	1"	<b>AW1 C4242 S ( )</b>	\$543.	\$813.	\$1,085.
	48"	48"	1"	<b>AW1 C4848 S ( )</b>	602.	904.	1,205.
	60"	60"	1"	<b>AW1 C6060 S ( )</b>	843.	n/a	n/a
30"D both sides corner worksurfaces	42"	42"	1"	<b>AW1 C4242 D ( )</b>	543.	813.	1,085.
	48"	48"	1"	<b>AW1 C4848 D ( )</b>	602.	904.	1,205.
	60"	60"	1"	<b>AW1 C6060 D ( )</b>	843.	n/a	n/a
30"D left/24"D right corner worksurfaces	42"	42"	1"	<b>AW1 C4242 L ( )</b>	543.	813.	1,085.
	48"	48"	1"	<b>AW1 C4848 L ( )</b>	602.	904.	1,205.
	60"	60"	1"	<b>AW1 C6060 L ( )</b>	843.	n/a	n/a
24"D left/30"D right corner worksurfaces	42"	42"	1"	<b>AW1 C4242 R ( )</b>	543.	813.	1,085.
	48"	48"	1"	<b>AW1 C4848 R ( )</b>	602.	904.	1,205.
	60"	60"	1"	<b>AW1 C6060 R ( )</b>	843.	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>AW1 C4848S 117</b>	Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.  <i>Worksurface depths:</i> S 24"D both sides L 30"D left/24"D right R 24"D left/30"D right D 30"D both sides  Specify top finish.	Worksurface edges are trim grey. Clear maple laminate is not available on 60w x 60d corner tops.  Universal worksurfaces are interchangeable with Currents desks. Specify worksurface supports separately.  Corner worksurfaces may be supported by two cantilever brackets on one back edges in combination with C-leg or pedestal support on other end.  Universal corner worksurfaces include a steel stiffener on both back edges that doubles as a horizontal cable manager.
<b>AW1</b> Worksurface		
<b>C</b> Corner		
<b>48</b> Width left		
<b>48</b> Width right		
<b>S</b> Depth left and right		
<b>117</b> Top finish		

Worksurfaces, universal  
*extended corner*  
*1 3/4" wire drop*  
*extended left*

Currents



description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces, extended left 	60"	36"	1"	<b>AW1 C6036 S ( )</b>	\$602.	\$904.	\$1,205.
	60"	42"	1"	<b>AW1 C6042 S ( )</b>	664.	993.	1,324.
	60"	48"	1"	<b>AW1 C6048 S ( )</b>	724.	1,085.	1,445.
	72"	36"	1"	<b>AW1 C7236 S ( )</b>	724.	1,085.	1,445.
	72"	42"	1"	<b>AW1 C7242 S ( )</b>	783.	1,174.	1,566.
	72"	48"	1"	<b>AW1 C7248 S ( )</b>	843.	1,266.	1,687.
	84"	36"	1"	<b>AW1 C8436 S ( )</b>	843.	1,266.	1,687.
	84"	42"	1"	<b>AW1 C8442 S ( )</b>	904.	1,355.	1,808.
84"	48"	1"	<b>AW1 C8448 S ( )</b>	964.	1,445.	1,928.	
30"D both sides corner worksurfaces, extended left 	60"	48"	1"	<b>AW1 C6048 D ( )</b>	784.	1,174.	1,567.
	72"	48"	1"	<b>AW1 C7248 D ( )</b>	904.	1,355.	1,808.
	84"	48"	1"	<b>AW1 C8448 D ( )</b>	1,024.	1,538.	2,050.
30"D left/24"D right corner worksurfaces, extended left 	60"	42"	1"	<b>AW1 C6042 L ( )</b>	724.	1,085.	1,445.
	60"	48"	1"	<b>AW1 C6048 L ( )</b>	784.	1,174.	1,567.
	72"	42"	1"	<b>AW1 C7242 L ( )</b>	843.	1,265.	1,687.
	72"	48"	1"	<b>AW1 C7248 L ( )</b>	904.	1,355.	1,808.
	84"	42"	1"	<b>AW1 C8442 L ( )</b>	964.	1,445.	1,928.
	84"	48"	1"	<b>AW1 C8448 L ( )</b>	1,024.	1,538.	2,050.
24"D left/30"D right corner worksurfaces, extended left	60"	42"	1"	<b>AW1 C6042 R ( )</b>	724.	1,085.	1,445.
	60"	48"	1"	<b>AW1 C6048 R ( )</b>	784.	1,174.	1,567.
	72"	42"	1"	<b>AW1 C7242 R ( )</b>	843.	1,265.	1,687.
	72"	48"	1"	<b>AW1 C7248 R ( )</b>	904.	1,355.	1,808.
	84"	42"	1"	<b>AW1 C8442 R ( )</b>	964.	1,445.	1,928.
	84"	48"	1"	<b>AW1 C8448 R ( )</b>	1,024.	1,538.	2,050.

Worksurfaces

Order Code	Specification Information	Application Notes
Example: <b>AW1 C6036S 117</b>		
<b>AW1</b> Worksurface	Dimensions shown in "w" column are nominal width of left back edge.	Worksurface edges are trim grey.
<b>C</b> Corner	Dimensions shown in "d" column are nominal width of right back edge.	
<b>60</b> Width left		Universal worksurfaces are interchangeable with Currents desks. Specify worksurface supports separately.
<b>36</b> Width right		
<b>S</b> Depth left and right	<i>Worksurface depths:</i>	Corner worksurfaces may be supported by two cantilever brackets on one back edge in combination with C-leg or pedestal support on other end.
<b>117</b> Top finish	S 24"D both sides L 30"D left/24"D right R 24"D left/30"D right D 30"D both sides	Universal extended corner worksurfaces include a steel stiffener on both back edges that doubles as a horizontal cable manager.
	Specify top finish.	

Worksurfaces, universal  
*extended corner*  
*1 3/4" wire drop*  
*extended right*

Currents

description	w	d	h	pattern no.	lam.	V2	V3	
24"D both sides corner worksurfaces, extended right 	36"	60"	1"	<b>AW1 C3660 S ( )</b>	\$602.	\$904.	\$1,205.	
	36"	72"	1"	<b>AW1 C3672 S ( )</b>	724.	1,085.	1,445.	
	36"	84"	1"	<b>AW1 C3684 S ( )</b>	843.	1,266.	1,687.	
	42"	60"	1"	<b>AW1 C4260 S ( )</b>	664.	993.	1,324.	
	42"	72"	1"	<b>AW1 C4272 S ( )</b>	783.	1,174.	1,566.	
	42"	84"	1"	<b>AW1 C4284 S ( )</b>	904.	1,355.	1,808.	
	48"	60"	1"	<b>AW1 C4860 S ( )</b>	724.	1,085.	1,445.	
	48"	72"	1"	<b>AW1 C4872 S ( )</b>	843.	1,266.	1,687.	
30"D both sides corner worksurfaces, extended right	48"	84"	1"	<b>AW1 C4884 S ( )</b>	964.	1,445.	1,928.	
	48"	60"	1"	<b>AW1 C4860 D ( )</b>	784.	1,174.	1,567.	
	48"	72"	1"	<b>AW1 C4872 D ( )</b>	904.	1,355.	1,808.	
30"D left/24"D right corner worksurfaces, extended right	48"	84"	1"	<b>AW1 C4884 D ( )</b>	1,024.	1,538.	2,050.	
	24"D left/30"D right corner worksurfaces, extended right 	42"	60"	1"	<b>AW1 C4260 R ( )</b>	724.	1,085.	1,445.
		42"	72"	1"	<b>AW1 C4272 R ( )</b>	843.	1,265.	1,687.
		42"	84"	1"	<b>AW1 C4284 R ( )</b>	964.	1,445.	1,928.
		48"	60"	1"	<b>AW1 C4860 R ( )</b>	784.	1,174.	1,567.
		48"	72"	1"	<b>AW1 C4872 R ( )</b>	904.	1,355.	1,808.
48"		84"	1"	<b>AW1 C4884 R ( )</b>	1,024.	1,538.	2,050.	
30"D left/24"D right corner worksurfaces, extended right	42"	60"	1"	<b>AW1 C4260 L ( )</b>	724.	1,085.	1,445.	
	42"	72"	1"	<b>AW1 C4272 L ( )</b>	843.	1,265.	1,687.	
	42"	84"	1"	<b>AW1 C4284 L ( )</b>	964.	1,445.	1,928.	
	48"	60"	1"	<b>AW1 C4860 L ( )</b>	784.	1,174.	1,567.	
	48"	72"	1"	<b>AW1 C4872 L ( )</b>	904.	1,355.	1,808.	
	48"	84"	1"	<b>AW1 C4884 L ( )</b>	1,024.	1,538.	2,050.	

**Order Code**

Example: <b>AW1 C3660S 117</b>
<b>AW1</b> Worksurface
<b>C</b> Corner
<b>36</b> Width left
<b>60</b> Width right
<b>S</b> Depth left and right
<b>117</b> Top finish

**Specification Information**

Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.

*Worksurface depths:*

S	24"D both sides
L	30"D left/24"D right
R	24"D left/30"D right
D	30"D both sides

Specify top finish.

Worksurface edges are trim grey.

**Application Notes**

Universal worksurfaces are interchangeable with Currents desks. Specify worksurface supports separately.

Corner worksurfaces may be supported by two cantilever brackets on one back edge in combination with C-leg or pedestal support on other end.



Universal extended corner worksurfaces include a steel stiffener on both back edges that doubles as a horizontal cable manager.



# Worksurfaces, universal

Currents

## *P-shape* *1 3/4" wire drop*




description	w	d	h	pattern no.	lam.	V2	V3
P-shape surfaces, extended left 	75"	48"	1"	<b>AW1 P7548 S ( )</b>	\$964.	\$1,445.	\$1,928.
	87"	48"	1"	<b>AW1 P8748 S ( )</b>	1,085.	1,628.	2,168.
P-shape surfaces, extended right 	48"	75"	1"	<b>AW1 P4875 S ( )</b>	964.	1,445.	1,928.
	48"	87"	1"	<b>AW1 P4887 S ( )</b>	1,085.	1,628.	2,168.

Worksurfaces

Order Code	Specification Information	Application Notes
Example: <b>AW1 P7548S 117</b>		
<b>AW1</b> Worksurface	Dimensions shown in "w" column are nominal width of left back edge.	Worksurface edges are trim grey.
<b>P</b> P-shape	Dimensions shown in "d" column are nominal width of right back edge.	
<b>75</b> Width left		P-shape worksurfaces may be cantilevered from service wall along 48" edge, and supported by 24"D C-leg at conference end. Specify two cantilever brackets and C-leg separately.
<b>48</b> Width right		
<b>S</b> Depth of return	Specify top finish.	All P-shape worksurfaces correspond to a 24"D adjacent straight or corner worksurface.
<b>117</b> Top finish		Universal P-shape worksurfaces include a steel stiffener on both back edges that doubles as a horizontal cable manager.



Worksurfaces, universal  
*shared and arc-shape*  
*1 3/4" wire drop*

Currents

description	w	d	h	pattern no.	lam.	V2	V3
36"D shared worksurface	36"	72"	1"	<b>AW1 R7236 ( )</b>	\$795.	\$1,193.	\$1,591.
							
36"D left, 24"D right arc shape surface	60"	34 1/4"	1"	<b>AW1 A60L ( )</b>	665.	994.	1,325.
	72"	34 1/4"	1"	<b>AW1 A72L ( )</b>	795.	1,193.	1,591.
36"D right, 24"D left arc shape surface	60"	34 1/4"	1"	<b>AW1 A60R ( )</b>	665.	994.	1,325.
	72"	34 1/4"	1"	<b>AW1 A72R ( )</b>	795.	1,193.	1,591.

Order Code	Specification Information	Application Notes
Example: <b>AW1 P7548S 117</b>	Specify top finish.	Worksurface edges are trim grey.
<b>AW1</b> Worksurface		36"D shared worksurface requires two straight legs and two end support brackets, or four straight legs.
<b>P</b> P-shape		
<b>75</b> Width left		
<b>48</b> Width right		Arc shape worksurfaces require 18"D floorstanding pedestal or 24"D C-leg at 24"D end and two end support brackets or straight legs at 36"D end.
<b>S</b> Depth of return		
<b>117</b> Top finish		Universal shared and arc-shape worksurfaces include a steel stiffener that doubles as a horizontal cable manager.



Currents worksurfaces for Morrison panels and linkable screens  
*straight, flat front*  
*3/8" wire drop and grommet*

description	w	d	h	pattern no.	lam.	V2	V3
24"D straight worksurface, flat front 	24"	23 3/8"	1"	<b>AWM2 F2424</b> ( ) ( )	\$243.	\$364.	\$487.
	30"	23 3/8"	1"	<b>AWM2 F3024</b> ( ) ( )	268.	401.	536.
	36"	23 3/8"	1"	<b>AWM2 F3624</b> ( ) ( )	291.	439.	584.
	42"	23 3/8"	1"	<b>AWM2 F4224</b> ( ) ( )	317.	475.	633.
	48"	23 3/8"	1"	<b>AWM2 F4824</b> ( ) ( )	341.	511.	681.
	54"	23 3/8"	1"	<b>AWM2 F5424</b> ( ) ( )	364.	549.	730.
	60"	23 3/8"	1"	<b>AWM2 F6024</b> ( ) ( )	389.	584.	780.
	66"	23 3/8"	1"	<b>AWM2 F6624</b> ( ) ( )	414.	620.	827.
	72"	23 3/8"	1"	<b>AWM2 F7224</b> ( ) ( )	439.	656.	876.
	78"	23 3/8"	1"	<b>AWM2 F7824</b> ( ) ( )	462.	695.	925.
	84"	23 3/8"	1"	<b>AWM2 F8424</b> ( ) ( )	487.	730.	973.
90"	23 3/8"	1"	<b>AWM2 F9024</b> ( ) ( )	510.	764.	1,021.	
96"	23 3/8"	1"	<b>AWM2 F9624</b> ( ) ( )	536.	803.	1,071.	
30"D straight worksurface, flat front 	30"	29 3/8"	1"	<b>AWM2 F3030</b> ( ) ( )	304.	456.	607.
	36"	29 3/8"	1"	<b>AWM2 F3630</b> ( ) ( )	329.	493.	656.
	42"	29 3/8"	1"	<b>AWM2 F4230</b> ( ) ( )	354.	529.	706.
	48"	29 3/8"	1"	<b>AWM2 F4830</b> ( ) ( )	376.	566.	755.
	54"	29 3/8"	1"	<b>AWM2 F5430</b> ( ) ( )	407.	612.	815.
	60"	29 3/8"	1"	<b>AWM2 F6030</b> ( ) ( )	439.	656.	876.
	66"	29 3/8"	1"	<b>AWM2 F6630</b> ( ) ( )	475.	711.	950.
	72"	29 3/8"	1"	<b>AWM2 F7230</b> ( ) ( )	511.	765.	1,022.
	78"	29 3/8"	1"	<b>AWM2 F7830</b> ( ) ( )	547.	820.	1,093.
	90"	29 3/8"	1"	<b>AWM2 F9030</b> ( ) ( )	620.	930.	1,241.
	96"	29 3/8"	1"	<b>AWM2 F9630</b> ( ) ( )	656.	985.	1,315.

Worksurfaces



Order Code	Specification Information	Application Notes
Example: <b>AWM2 F4830 117 111</b> <b>AWM2</b> Worksurface <b>F</b> Flat <b>48</b> Width <b>30</b> Depth <b>117</b> Top finish <b>111</b> Trim finish	Specify top finish first, followed by trim finish.	<p>Worksurfaces are sized for Morrison panel-based applications and may be supported by Morrison panel planning brackets or end-supported from Currents wall. 24"D straight tops may also be cantilevered from Currents service wall. Underside of worksurfaces is drilled to accept all Morrison panel-planning brackets, Morrison and Currents pedestals, and worksurface stiffeners. 24"D straight tops are also drilled to accept Currents wall cantilever brackets.</p> <p>Currents worksurfaces for Morrison require stiffener when the span between structural supports exceeds 36". Specify worksurface stiffeners and supports separately.</p> <p>Currents worksurfaces for Morrison cannot be used in conjunction with Morrison Network desk supports.</p>
		<p>Actual worksurface depth is 3/8" less than nominal 24" and 30" for cable clearance.</p> <p>All worksurfaces include one edge grommet, centered at rear of worksurface, with maximum clearance of 1 3/8".</p> <p>Currents for Morrison worksurfaces feature crisp 90° corners eliminating the corner kick detail typical of Currents universal and desk tops. Eliminating the corner kick will facilitate the use of brackets, pedestals and end panels at the side edge of worksurfaces and will eliminate undesired gaps at worksurface joints.</p> <p>24"D straight Currents worksurfaces for Morrison up to 84" wide may be cantilevered from the service wall with two cantilever brackets and applicable width worksurface stiffener.</p> <p>24"D straight Currents worksurfaces for Morrison wider than 84" require three cantilever brackets and applicable width worksurface stiffeners.</p>

Currents worksurfaces for Morrison panels and linkable screens  
*extended corner*  
*3/8" wire drop and grommet*  
*extended left*

description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces, extended left 	60"	36"	1"	<b>AWM2 C6036 S ( ) ( )</b>	\$602.	\$904.	\$1,205.
	60"	42"	1"	<b>AWM2 C6042 S ( ) ( )</b>	664.	993.	1,324.
	60"	48"	1"	<b>AWM2 C6048 S ( ) ( )</b>	724.	1,085.	1,445.
	72"	36"	1"	<b>AWM2 C7236 S ( ) ( )</b>	724.	1,085.	1,445.
	72"	42"	1"	<b>AWM2 C7242 S ( ) ( )</b>	783.	1,174.	1,566.
	72"	48"	1"	<b>AWM2 C7248 S ( ) ( )</b>	843.	1,266.	1,687.
	84"	48"	1"	<b>AWM2 C8448 S ( ) ( )</b>	964.	1,445.	1,928.
30"D both sides corner worksurfaces, extended left	60"	48"	1"	<b>AWM2 C6048 D ( ) ( )</b>	784.	1,174.	1,567.
	72"	48"	1"	<b>AWM2 C7248 D ( ) ( )</b>	904.	1,355.	1,808.
	84"	48"	1"	<b>AWM2 C8448 D ( ) ( )</b>	1,024.	1,538.	2,050.
30"D left/24"D right corner worksurfaces, extended left 	60"	42"	1"	<b>AWM2 C6042 L ( ) ( )</b>	724.	1,085.	1,445.
	60"	48"	1"	<b>AWM2 C6048 L ( ) ( )</b>	784.	1,174.	1,567.
	72"	42"	1"	<b>AWM2 C7242 L ( ) ( )</b>	843.	1,265.	1,687.
	72"	48"	1"	<b>AWM2 C7248 L ( ) ( )</b>	904.	1,355.	1,808.
	84"	48"	1"	<b>AWM2 C8448 L ( ) ( )</b>	1,024.	1,538.	2,050.
24"D left/30"D right corner worksurfaces, extended left	60"	42"	1"	<b>AWM2 C6042 R ( ) ( )</b>	724.	1,085.	1,445.
	60"	48"	1"	<b>AWM2 C6048 R ( ) ( )</b>	784.	1,174.	1,567.
	72"	42"	1"	<b>AWM2 C7242 R ( ) ( )</b>	843.	1,265.	1,687.
	72"	48"	1"	<b>AWM2 C7248 R ( ) ( )</b>	904.	1,355.	1,808.
	84"	48"	1"	<b>AWM2 C8448 R ( ) ( )</b>	1,024.	1,538.	2,050.

Order Code	Specification Information	Application Notes
Example: <b>AWM2 C6036S 117 111</b>	Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.	Worksurfaces are sized for Morrison panel-based applications and may be supported by Morrison panel-planning brackets or end-supported and cantilevered from Currents wall. Extended side may also be supported with Currents C-legs. Underside of work surface is drilled to accept all Morrison panel-planning brackets, Morrison and Currents pedestals, work surface stiffeners and Currents C-leg on the extended side.
<b>AWM2</b> Worksurface		Currents for Morrison worksurfaces feature crisp 90° corners eliminating the corner kick detail typical of Currents universal and desk tops. Eliminating the corner kick will facilitate the use of brackets, pedestals and end panels at the side edge of worksurfaces and will eliminate undesired gaps at work surface joints.
<b>C</b> Corner		Currents worksurfaces for Morrison require stiffener when the span between structural supports exceeds 36". Specify work surface stiffeners and supports separately.
<b>60</b> Width left		Currents worksurfaces for Morrison cannot be used in conjunction with Morrison Network desk supports.
<b>36</b> Width right		Actual work surface is 3/8" less than nominal 24" and 30" for cable clearance.
<b>S</b> Depth left and right	<i>Worksurface depths:</i> S 24"D both sides L 30"D left/24"D right R 24"D left/30"D right D 30"D both sides	All worksurfaces include two edge grommets, centered on back edges of work surface, with maximum clearance of 1 3/8".
<b>117</b> Top finish	Specify top finish first, followed by trim finish.	
<b>111</b> Trim finish		

Currents worksurfaces for Morrison panels and linkable screens  
*extended corner*  
*3/8" wire drop and grommet*  
*extended right*





description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces extended right 	36"	60"	1"	<b>AWM2 C3660 S ( ) ( )</b>	\$602.	\$904.	\$1,205.
	36"	72"	1"	<b>AWM2 C3672 S ( ) ( )</b>	724.	1,085.	1,445.
	42"	60"	1"	<b>AWM2 C4260 S ( ) ( )</b>	664.	993.	1,324.
	42"	72"	1"	<b>AWM2 C4272 S ( ) ( )</b>	783.	1,174.	1,566.
	48"	60"	1"	<b>AWM2 C4860 S ( ) ( )</b>	724.	1,085.	1,445.
	48"	72"	1"	<b>AWM2 C4872 S ( ) ( )</b>	843.	1,266.	1,687.
	48"	84"	1"	<b>AWM2 C4884 S ( ) ( )</b>	964.	1,445.	1,928.
30"D both sides corner worksurfaces, extended right	48"	60"	1"	<b>AWM2 C4860 D ( ) ( )</b>	784.	1,174.	1,567.
	48"	72"	1"	<b>AWM2 C4872 D ( ) ( )</b>	904.	1,355.	1,808.
	48"	84"	1"	<b>AWM2 C4884 D ( ) ( )</b>	1,024.	1,538.	2,050.
24"D left/30"D right corner worksurfaces, extended right 	42"	60"	1"	<b>AWM2 C4260 R ( ) ( )</b>	724.	1,085.	1,445.
	42"	72"	1"	<b>AWM2 C4272 R ( ) ( )</b>	843.	1,265.	1,687.
	48"	60"	1"	<b>AWM2 C4860 R ( ) ( )</b>	784.	1,174.	1,567.
	48"	72"	1"	<b>AWM2 C4872 R ( ) ( )</b>	904.	1,355.	1,808.
	48"	84"	1"	<b>AWM2 C4884 R ( ) ( )</b>	1,024.	1,538.	2,050.
30"D left/24"D right corner worksurfaces, extended right	42"	60"	1"	<b>AWM2 C4260 L ( ) ( )</b>	724.	1,085.	1,445.
	42"	72"	1"	<b>AWM2 C4272 L ( ) ( )</b>	843.	1,265.	1,687.
	48"	60"	1"	<b>AWM2 C4860 L ( ) ( )</b>	784.	1,174.	1,567.
	48"	72"	1"	<b>AWM2 C4872 L ( ) ( )</b>	904.	1,355.	1,808.
	48"	84"	1"	<b>AWM2 C4884 L ( ) ( )</b>	1,024.	1,538.	2,050.

Worksurfaces

Order Code	Specification Information	Application Notes
Example: <b>AWM2 C3660S 117 111</b>	Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.	Worksurfaces are sized for Morrison panel-based applications and may be supported by Morrison panel-planning brackets or end-supported and cantilevered from Currents wall. Extended side may also be supported with Currents C-legs. Underside of worksurface is drilled to accept all Morrison panel-planning brackets, Morrison and Currents pedestals, worksurface stiffeners and Currents C-leg on the extended side.
<b>AWM2</b> Worksurface		Currents for Morrison worksurfaces feature crisp 90° corners eliminating the corner kick detail typical of Currents universal and desk tops. Eliminating the corner kick will facilitate the use of brackets, pedestals and end panels at the side edge of worksurfaces and will eliminate undesired gaps at worksurface joints.
<b>C</b> Corner		Currents worksurfaces for Morrison require stiffener when the span between structural supports exceeds 36". Specify worksurface stiffeners and supports separately.
<b>36</b> Width left		Currents worksurfaces for Morrison cannot be used in conjunction with Morrison Network desk supports.
<b>60</b> Width right		Actual worksurface is 3/8" less than nominal 24" and 30" for cable clearance.
<b>S</b> Depth left and right	<i>Worksurface depths:</i> S 24"D both sides L 30"D left/24"D right R 24"D left/30"D right D 30"D both sides	All worksurfaces include two edge grommets, centered on back edges of worksurface, with maximum clearance of 1 3/8".
<b>117</b> Top finish	Specify top finish first, followed by trim finish.	
<b>111</b> Trim finish		

# Currents worksurfaces for Morrison panels and linkable screens

## corner 3/8" wire drop and grommet

description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces 	42"	42"	1"	<b>AWM2 C4242 S ( ) ( )</b>	\$543.	\$813.	\$1,085.
	48"	48"	1"	<b>AWM2 C4848 S ( ) ( )</b>	602.	904.	1,205.
	60"	60"	1"	<b>AWM2 C6060 S ( ) ( )</b>	843.	n/a	n/a
30"D both sides corner worksurfaces 	42"	42"	1"	<b>AWM2 C4242 D ( ) ( )</b>	543.	813.	1,085.
	48"	48"	1"	<b>AWM2 C4848 D ( ) ( )</b>	602.	904.	1,205.
	60"	60"	1"	<b>AWM2 C6060 D ( ) ( )</b>	843.	n/a	n/a
30"D left/24"D right corner worksurfaces 	42"	42"	1"	<b>AWM2 C4242 L ( ) ( )</b>	543.	813.	1,085.
	48"	48"	1"	<b>AWM2 C4848 L ( ) ( )</b>	602.	904.	1,205.
	60"	60"	1"	<b>AWM2 C6060 L ( ) ( )</b>	843.	n/a	n/a
24"D left/30"D right corner worksurfaces 	42"	42"	1"	<b>AWM2 C4242 R ( ) ( )</b>	543.	813.	1,085.
	48"	48"	1"	<b>AWM2 C4848 R ( ) ( )</b>	602.	904.	1,205.
	60"	60"	1"	<b>AWM2 C6060 R ( ) ( )</b>	843.	n/a	n/a


Order Code	Specification Information	Application Notes
Example: <b>AWM2 C4848S 117 111</b> <b>AWM2</b> Worksurface <b>C</b> Corner <b>48</b> Width left <b>48</b> Width right <b>S</b> Depth left and right <b>117</b> Top finish <b>111</b> Trim finish	Dimensions shown in "w" column are nominal width of left back edge.  Dimensions shown in "d" column are nominal width of right back edge.  <i>Worksurface depths:</i> S 24"D both sides L 30"D left/24"D right R 24"D left/30"D right D 30"D both sides  Specify top finish first, followed by trim finish.	Currents for Morrison worksurfaces feature crisp 90° corners eliminating the corner kick detail typical of Currents universal and desk tops. Eliminating the corner kick will facilitate the use of brackets, pedestals and end panels at the side edge of worksurfaces and will eliminate undesired gaps at worksurface joints.  Clear Maple is not available on 60"W x 60"D corner worksurfaces.  Worksurfaces are sized for Morrison panel-based applications and may be supported by Morrison panel-planning brackets or end-supported and cantilevered from Currents wall. Underside of worksurfaces is drilled to accept all Morrison panel-planning brackets, Morrison and Currents pedestals, and worksurface stiffeners. 24"D worksurfaces are also drilled to accept Currents wall cantilever brackets.  Currents worksurfaces for Morrison require stiffener when the span between structural supports exceeds 36". Specify worksurface stiffeners and supports separately.  All P-shaped worksurfaces correspond to a 24"D adjacent straight or corner worksurface.  Currents worksurfaces for Morrison cannot be used in conjunction with Morrison Network desk supports.  Actual worksurface depth is 3/8" less than nominal 24" and 30" for cable clearance.  All worksurfaces include two edge grommets, centered on back edges of worksurface, with maximum clearance of 1 5/8".

# Currents worksurfaces for Morrison panels and linkable screens

## P-shapes

### 3/8" wire drop and grommet

description	w	d	h	pattern no.	lam.	V2	V3
P-shape surfaces, extended right	48"	75"	1"	<b>AWM2 P4875 S ( ) ( )</b>	\$964.	\$1,445.	\$1,928.
	48"	87"	1"	<b>AWM2 P4887 S ( ) ( )</b>	1,085.	1,628.	2,168.



P-shape surfaces, extended left	75"	48"	1"	<b>AWM2 P7548 S ( ) ( )</b>	964.	1,445.	1,928.
	87"	48"	1"	<b>AWM2 P8748 S ( ) ( )</b>	1,085.	1,628.	2,168.




Order Code	Specification Information	Application Notes
<p>Example: <b>AWM2 C4848S 117 111</b></p> <p><b>AWM2</b> Worksurface</p> <p><b>C</b> Corner</p> <p><b>48</b> Width left</p> <p><b>48</b> Width right</p> <p><b>S</b> Depth left and right</p> <p><b>117</b> Top finish</p> <p><b>111</b> Trim finish</p>	<p>Dimensions shown in "w" column are nominal width of left back edge.</p> <p>Dimensions shown in "d" column are nominal width of right back edge.</p> <p><i>Worksurface depths:</i></p> <p>S 24"D both sides                      L 30"D left/24"D right                      R 24"D left/30"D right                      D 30"D both sides</p> <p>Specify top finish first, followed by trim finish.</p>	<p>Currents for Morrison worksurfaces feature crisp 90° corners eliminating the corner kick detail typical of Currents universal and desk tops. Eliminating the corner kick will facilitate the use of brackets, pedestals and end panels at the side edge of worksurfaces and will eliminate undesired gaps at worksurface joints.</p> <p>Clear Maple is not available on 60"W x 60"D corner worksurfaces.</p> <p>Currents worksurfaces for Morrison panel-based applications and may be supported by Morrison panel-planning brackets or end-supported and cantilevered from Currents wall. Underside of worksurfaces is drilled to accept all Morrison panel-planning brackets, Morrison and Currents pedestals, and worksurface stiffeners. 24"D worksurfaces are also drilled to accept Currents wall cantilever brackets.</p> <p>Currents worksurfaces for Morrison require stiffener when the span between structural supports exceeds 36". Specify worksurface stiffeners and supports separately.</p> <p>All P-shaped worksurfaces correspond to a 24"D adjacent straight or corner worksurface.</p> <p>Currents worksurfaces for Morrison cannot be used in conjunction with Morrison Network desk supports.</p> <p>Actual worksurface depth is 3/8" less than nominal 24" and 30" for cable clearance.</p> <p>All worksurfaces include two edge grommets, centered on back edges of worksurface, with maximum clearance of 1 5/8".</p>

# Currents worksurfaces for Morrison panels and linkable screens

## *stiffeners*

Currents

description	type	w	d	h	pattern no.	price
Stiffener for worksurfaces 	36"	20"	1 1/2"	1"	<b>AWM1 S36</b>	\$47.
	42"	26"	1 1/2"	1"	<b>AWM1 S42</b>	49.
	48"	32"	1 1/2"	1"	<b>AWM1 S48</b>	51.
	60"	44"	1 1/2"	1"	<b>AWM1 S60</b>	53.
	66"	50"	1 1/2"	1"	<b>AWM1 S66</b>	55.
	72"	56"	1 1/2"	1"	<b>AWM1 S72</b>	57.
	78"	62"	1 1/2"	1"	<b>AWM1 S78</b>	60.
	84"	68"	1 1/2"	1"	<b>AWM1 S84</b>	62.

### Order Code

Example: **AWM1 S36**

**AWM1** Stiffener

**S** Straight

**36** Application

### Specification Information

Stiffeners are black painted finish.

### Application Notes

Currents worksurfaces for Morrison require stiffeners when the span between structural supports (end supports, cantilevers, pedestals, or C-legs) exceeds 36". Stiffener also serves as horizontal cable manager.

Stiffener corresponds in width to straight or corner worksurface back edge.

For 90" application span, use AWM1-S84 stiffener.

Stiffener mounts 18" from front edge of worksurface and will interfere with mobile or floorstanding pedestals greater than 18" deep.



To accommodate a floorstanding pedestal greater than 18" deep at one end of worksurface, specify stiffener for 12" narrower worksurface. To accommodate two floorstanding pedestals or double-wide at one end of worksurface, specify stiffener for 24" narrower worksurface.



# Cascade edge worksurfaces

## Rectangular

Currents

description	w	d	h	pattern no.	Solid	Woodgrain
24"D Rectangular 	24"	24"	1 1/8"	<b>ACE1R2424N</b>	\$171.	\$197.
	30"	24"	1 1/8"	<b>ACE1R3024N</b>	197.	227.
	36"	24"	1 1/8"	<b>ACE1R3624N</b>	218.	251.
	42"	24"	1 1/8"	<b>ACE1R4224N</b>	251.	289.
	48"	24"	1 1/8"	<b>ACE1R4824N</b>	282.	324.
	54"	24"	1 1/8"	<b>ACE1R5424N</b>	303.	348.
	60"	24"	1 1/8"	<b>ACE1R6024N</b>	329.	378.
	66"	24"	1 1/8"	<b>ACE1R6624N</b>	355.	408.
	72"	24"	1 1/8"	<b>ACE1R7224N</b>	371.	427.
	78"	24"	1 1/8"	<b>ACE1R7824N</b>	398.	458.
	84"	24"	1 1/8"	<b>ACE1R8424N</b>	421.	484.
90"	24"	1 1/8"	<b>ACE1R9024N</b>	475.	546.	
96"	24"	1 1/8"	<b>ACE1R9624N</b>	518.	596.	
30"D Rectangular 	24"	30"	1 1/8"	<b>ACE1R2430N</b>	219.	252.
	30"	30"	1 1/8"	<b>ACE1R3030N</b>	245.	282.
	36"	30"	1 1/8"	<b>ACE1R3630N</b>	272.	313.
	42"	30"	1 1/8"	<b>ACE1R4230N</b>	296.	340.
	48"	30"	1 1/8"	<b>ACE1R4830N</b>	329.	378.
	54"	30"	1 1/8"	<b>ACE1R5430N</b>	372.	428.
	60"	30"	1 1/8"	<b>ACE1R6030N</b>	409.	470.
	66"	30"	1 1/8"	<b>ACE1R6630N</b>	456.	524.
	72"	30"	1 1/8"	<b>ACE1R7230N</b>	475.	546.
	78"	30"	1 1/8"	<b>ACE1R7830N</b>	507.	583.
	84"	30"	1 1/8"	<b>ACE1R8430N</b>	538.	619.
90"	30"	1 1/8"	<b>ACE1R9030N</b>	579.	666.	
96"	30"	1 1/8"	<b>ACE1R9630N</b>	619.	712.	

Worksurfaces

Order Code	Specification Information	Application Notes
Example: <b>ACE1 R4824N 118</b> <b>ACE1</b> Cascade edge worksurface <b>R</b> Rectangular <b>48</b> Width <b>24</b> Depth <b>N</b> No grommet <b>118</b> Top finish	<i>Specify:</i> Grommet / No grommet. Replace the "N" suffix from the pattern number with "G". Add \$20.  Available finishes:  Solid: 114 Folkstone Grey 117 Soft Grey 118 Bright White 119 Pumice  Woodgrain: 124 Medium Cherry 125 Natural Maple 126 Natural Cherry 127 Walnut	Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.  Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.  Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".


Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.

Worksurfaces may be supported at each end by pedestals or end support "EC" brackets and cantilever brackets matching the worksurface depth. 24"D rectangular worksurfaces may also be cantilevered from the Currents service wall.

Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.

# Cascade edge worksurfaces

## Curvilinear corner

description	A	B	C	h	pattern no.	Solid	Woodgrain
	36"	24"	24"	1 1/8"	<b>ACE1L3636SSN</b>	\$430.	\$495.
	42"	24"	24"	1 1/8"	<b>ACE1L4242SSN</b>	518.	596.
	42"	24"	30"	1 1/8"	<b>ACE1L4242SDN</b>	616.	708.
	42"	30"	24"	1 1/8"	<b>ACE1L4242DSN</b>	616.	708.
	48"	24"	24"	1 1/8"	<b>ACE1L4848SSN</b>	583.	670.
	48"	24"	30"	1 1/8"	<b>ACE1L4848SDN</b>	697.	802.
	48"	30"	24"	1 1/8"	<b>ACE1L4848DSN</b>	697.	802.
	48"	30"	30"	1 1/8"	<b>ACE1L4848DDN</b>	626.	720.

### Order Code

Example:	<b>ACE1 L4848SSG 114</b>
<b>ACE1</b>	Cascade edge worksurface
<b>L</b>	Curvilinear "L" top
<b>48</b>	Width left
<b>48</b>	Width right
<b>S</b>	24" depth left side
<b>S</b>	24" depth right side
<b>G</b>	Grommets
<b>114</b>	Top finish

### Specification Information

*Specify:*  
 Grommet / No grommet.  
 Replace the "N" suffix from the pattern number with "G". Add \$40.

Available finishes:

Solid:

114	Folkstone Grey
117	Soft Grey
118	Bright White
119	Pumice

Woodgrain:

124	Medium Cherry
125	Natural Maple
126	Natural Cherry
127	Walnut

### Application Notes

Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions.

Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.

Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.

Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".


Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.

Worksurfaces may be supported by left or right hand 18" cantilever bracket at the rear corner, and cantilever bridging brackets on each side edge. Worksurfaces may also be end supported or cantilever-bracket supported from Currents wall. Extended side of blended L may also be supported with Currents C-legs.

Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.

# Cascade edge worksurfaces

## Blended "D"

description	A	B	C	h	pattern no.	Solid	Woodgrain
 <p>right hand shown</p>	66"	48"	24"	1 1/8"	<b>ACE1BD6648S(L/R)</b>	\$695.	\$799.
	66"	48"	30"	1 1/8"	<b>ACE1BD6648D(L/R)</b>	731.	841.
	72"	48"	24"	1 1/8"	<b>ACE1BD7248S(L/R)</b>	711.	818.
	72"	48"	30"	1 1/8"	<b>ACE1BD7248D(L/R)</b>	758.	872.
	78"	48"	24"	1 1/8"	<b>ACE1BD7848S(L/R)</b>	821.	944.
	78"	48"	30"	1 1/8"	<b>ACE1BD7848D(L/R)</b>	848.	975.
	84"	48"	24"	1 1/8"	<b>ACE1BD8448S(L/R)</b>	843.	969.
	84"	48"	30"	1 1/8"	<b>ACE1BD8448D(L/R)</b>	896.	1,030.

Order Code	Specification Information	Application Notes
<p>Example: <b>ACE1BD6648SL 118</b></p> <p><b>ACE1</b> Cascade edge worksurface</p> <p><b>BD</b> Blended "D"</p> <p><b>66</b> Width</p> <p><b>48</b> Depth</p> <p><b>S</b> 24"d return</p> <p><b>L</b> Extended left</p> <p><b>118</b> Top finish</p>	<p>Available finishes:</p> <p>Solid:</p> <p>114 Folkstone Grey</p> <p>117 Soft Grey</p> <p>118 Bright White</p> <p>119 Pumice</p> <p>Woodgrain:</p> <p>124 Medium Cherry</p> <p>125 Natural Maple</p> <p>126 Natural Cherry</p> <p>127 Walnut</p>	<p>Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.</p> <p>Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.</p> <p>Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.</p>

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".


Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.

Blended D worksurfaces are supported by a 48" VDT support bracket kit for cantilevering from the Currents wall in conjunction with Currents C-leg. Use flat bracket or bridging bracket to join to adjacent worksurface.

# Cascade edge worksurfaces

## Blended "L"

Currents

description	B	C	A	D	h	pattern no.	Solid	Woodgrain
	42"	60"	24"	24"	1 1/8"	<b>ACE1L4260SSN</b>	\$712.	\$819.
	42"	66"	24"	24"	1 1/8"	<b>ACE1L4266SSN</b>	731.	841.
	42"	72"	24"	24"	1 1/8"	<b>ACE1L4272SSN</b>	759.	873.
	42"	78"	24"	24"	1 1/8"	<b>ACE1L4278SSN</b>	767.	882.
	48"	60"	24"	24"	1 1/8"	<b>ACE1L4860SSN</b>	721.	829.
	48"	60"	24"	30"	1 1/8"	<b>ACE1L4860SDN</b>	708.	814.
	48"	60"	30"	24"	1 1/8"	<b>ACE1L4860DSN</b>	708.	814.
	48"	66"	24"	24"	1 1/8"	<b>ACE1L4866SSN</b>	747.	859.
	48"	66"	24"	30"	1 1/8"	<b>ACE1L4866SDN</b>	744.	856.
	48"	66"	30"	24"	1 1/8"	<b>ACE1L4866DSN</b>	744.	856.
	48"	72"	24"	24"	1 1/8"	<b>ACE1L4872SSN</b>	774.	890.
	48"	72"	24"	30"	1 1/8"	<b>ACE1L4872SDN</b>	779.	896.
	48"	72"	30"	24"	1 1/8"	<b>ACE1L4872DSN</b>	779.	896.
	48"	78"	24"	24"	1 1/8"	<b>ACE1L4878SSN</b>	854.	982.
	48"	84"	24"	24"	1 1/8"	<b>ACE1L4884SSN</b>	960.	1,104.
	60"	42"	24"	24"	1 1/8"	<b>ACE1L6042SSN</b>	712.	819.
	60"	48"	24"	24"	1 1/8"	<b>ACE1L6048SSN</b>	721.	829.
	60"	48"	24"	30"	1 1/8"	<b>ACE1L6048SDN</b>	708.	814.
	60"	48"	30"	24"	1 1/8"	<b>ACE1L6048DSN</b>	708.	814.
	66"	42"	24"	24"	1 1/8"	<b>ACE1L6642SSN</b>	731.	841.
	66"	48"	24"	24"	1 1/8"	<b>ACE1L6648SSN</b>	747.	859.
	66"	48"	24"	30"	1 1/8"	<b>ACE1L6648SDN</b>	744.	856.
	66"	48"	30"	24"	1 1/8"	<b>ACE1L6648DSN</b>	744.	856.
	72"	42"	24"	24"	1 1/8"	<b>ACE1L7242SSN</b>	759.	873.
	72"	48"	24"	24"	1 1/8"	<b>ACE1L7248SSN</b>	774.	890.
	72"	48"	24"	30"	1 1/8"	<b>ACE1L7248SDN</b>	779.	896.
	72"	48"	30"	24"	1 1/8"	<b>ACE1L7248DSN</b>	779.	896.

Order Code	Specification Information	Application Notes
<p>Example: <b>ACE1 L4260SSN 114</b></p> <p><b>ACE1</b> Cascade edge worksurface</p> <p><b>L</b> Blended "L" top</p> <p><b>42</b> Width</p> <p><b>60</b> Depth</p> <p><b>S</b> 24"d, left side</p> <p><b>S</b> 24"d, right side</p> <p><b>N</b> No Grommet</p> <p><b>114</b> Top finish</p>	<p><i>Specify:</i> Grommet / No grommet. Replace the "N" suffix from the pattern number with "G". Add \$40.</p> <p>Available finishes:</p> <p>Solid:</p> <p>114 Folkstone Grey 117 Soft Grey 118 Bright White 119 Pumice</p> <p>Woodgrain:</p> <p>124 Medium Cherry 125 Natural Maple 126 Natural Cherry 127 Walnut</p>	<p>Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions.</p> <p>Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.</p> <p>Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.</p> <p>Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.</p>

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".

Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.


Worksurfaces may be supported by left or right hand 18" cantilever bracket at the rear corner, and cantilever bridging brackets on each side edge. Worksurfaces may also be end supported or cantilever-bracket supported from Currents wall. Extended side of blended L may also be supported with Currents C-legs.

Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.

# Cascade edge worksurfaces

## Blended "L"

description	B	C	A	D	h	pattern no.	Solid	Woodgrain
Blended "L"	78"	42"	24"	24"	1 1/8"	<b>ACE1L7842SSN</b>	\$767.	\$882.
	78"	48"	24"	24"	1 1/8"	<b>ACE1L7848SSN</b>	854.	982.
	84"	48"	24"	24"	1 1/8"	<b>ACE1L8448SSN</b>	960.	1,104.








Order Code	Specification Information	Application Notes
Example: <b>ACE1 L4260SSN 114</b>	<i>Specify:</i>	Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions.
<b>ACE1</b> Cascade edge worksurface	Grommet / No grommet. Replace the "N" suffix from the pattern number with "G". Add \$40.	Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.
<b>L</b> Blended "L" top	Available finishes:	Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.
<b>42</b> Width	Solid:	Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".
<b>60</b> Depth	114 Folkstone Grey	Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.
<b>S</b> 24"d, left side	117 Soft Grey	Worksurfaces may be supported by left or right hand 18" cantilever bracket at the rear corner, and cantilever bridging brackets on each side edge. Worksurfaces may also be end supported or cantilever-bracket supported from Currents wall.
<b>S</b> 24"d, right side	118 Bright White	Extended side of blended L may also be supported with Currents C-legs.
<b>N</b> No Grommet	119 Pumice	Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.
<b>114</b> Top finish	Woodgrain:	
	124 Medium Cherry	
	125 Natural Maple	
	126 Natural Cherry	
	127 Walnut	
	Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.	
	Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.	

# Cascade edge worksurfaces

## *Half round and corner round*

Currents

description	w	d	h	pattern no.	Solid	Woodgrain
 Half Round	48"	18"	1 1/8"	<b>ACE1H4818</b>	\$371.	\$427.
	49 1/2"	18"	1 1/8"	<b>ACE1H4818P</b>	371.	427.
	60"	24"	1 1/8"	<b>ACE1H6024</b>	511.	588.
	61 1/2"	24"	1 1/8"	<b>ACE1H6024P</b>	511.	588.
 LH Corner Round	24"	24"	1 1/8"	<b>AWF1CR24L</b>	197.	227.
 RH Corner Round	24"	24"	1 1/8"	<b>AWF1CR24R</b>	197.	227.
 Notched Corner Round	24"	24"	1 1/8"	<b>AWF1CR24N</b>	197.	227.
 Sample	12"	12"	1 1/8"	<b>ACE1R1212G</b>	107.	123.

Order Code	Specification Information	Application Information
Example: <b>ACE1 H4818P 117</b> <b>ACE1</b> Cascade edge worksurface <b>H</b> Half round <b>48</b> Width <b>18</b> Depth <b>P</b> Notched for panel <b>117</b> Top finish	Available finishes: Solid: 114 Folkstone Grey 117 Soft Grey 118 Bright White 119 Pumice Woodgrain: 124 Medium Cherry 125 Natural Maple 126 Natural Cherry 127 Walnut	<p>Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.</p> <p>Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.</p> <p>Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall. Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.</p>

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".

Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.

### *Half round*



Half round worksurfaces may be supported by cantilever bridging brackets in conjunction with a rounded end support column.

### *Corner round*

Notched corner round worksurfaces are supported by cantilever bridging brackets on both side edges. End run Left- and Right-hand corner round worksurfaces are supported by a combination of an "EC" end bracket along the panel edge and a cantilever bridging bracket to the adjacent worksurface side edge.

# Cascade edge worksurfaces

## Wave end

description	1	2	3	A	B	h	pattern no.	Solid	Woodgrain
Wave End, LH 	36"	24"	30"	15"	3"	1 1/8"	<b>ACE1W363024N</b>	\$462.	\$531.
	42"	24"	30"	15"	9"	1 1/8"	<b>ACE1W423024N</b>	485.	558.
	48"	24"	30"	15"	15"	1 1/8"	<b>ACE1W483024N</b>	519.	597.
	72"	24"	30"	23 1/2"	30 1/2"	1 1/8"	<b>ACE1W723024N</b>	661.	760.
Wave End, RH 	36"	30"	24"	3"	15"	1 1/8"	<b>ACE1W362430N</b>	462.	531.
	42"	30"	24"	9"	15"	1 1/8"	<b>ACE1W422430N</b>	485.	558.
	48"	30"	24"	15"	15"	1 1/8"	<b>ACE1W482430N</b>	519.	597.
	72"	30"	24"	23 1/2"	30 1/2"	1 1/8"	<b>ACE1W722430N</b>	661.	760.

### Order Code

Example:	<b>ACE1W483024N 118</b>
<b>ACE1</b>	Cascade edge worksurface
<b>W</b>	Wave end
<b>48</b>	Width
<b>30</b>	Depth, right side
<b>24</b>	Depth, left side
<b>N</b>	No grommet
<b>118</b>	Top finish

### Specification Information

*Specify:*  
Grommet / No grommet.  
Replace the "N" suffix from the pattern number with "G". Add \$20.

Available finishes:

Solid:

114	Folkstone Grey
117	Soft Grey
118	Bright White
119	Pumice

Woodgrain:

124	Medium Cherry
125	Natural Maple
126	Natural Cherry
127	Walnut

### Application Notes

Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.

Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.

Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edge of worksurface for maximum clearance of 1 3/8".

Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.






Worksurfaces may be supported at each end by pedestals or end support "EC" brackets and cantilever brackets matching the worksurface depth. Use cantilever bridging bracket to join to adjacent worksurface.

Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.

# Worksurface supports

## *wall-mounted*

Currents

description	type	w	d	h	pattern no.	paint
Adjustable cantilever bracket (up to 24"D)		3"	20"	23-33"	<b>AB1 AC24 ( )</b>	\$169.
						
Adjustable cantilever bridging bracket		3"	20"	23-33"	<b>AB1-ABC24( )</b>	219.
Fixed end support bracket		3"	6"	27"	<b>AB1 FE ( )</b>	103.
						
Adjustable end support bracket		3"	6"	23-33"	<b>AB2 AE ( )</b>	134.
						
Compact fixed end support bracket	for 28"h worksurface		6"	27"	<b>AB2 FE27 ( )</b>	114.
	for 29 <sup>5</sup> / <sub>8</sub> " h worksurface		6"	28"	<b>AB2 FE28 ( )</b>	114.
						
Fence end bracket kit					<b>AB1 FAE ( )</b>	148.
						

### Order Code

Example: <b>AB1 AC24 117</b>	
<b>AB1</b>	Bracket
<b>AC</b>	Type
<b>24</b>	Depth
<b>117</b>	Finish

### Specification Information

*Specify painted finishes for support column, C-leg, and brackets.*

Fence end bracket kit includes a left and a right handed bracket.

*Specify paint finish for end bracket.*

### Application Notes

Specify worksurface cantilever and end support brackets to attach worksurfaces to Currents service walls.

Specify two cantilever brackets to support any 24"D Currents, Morrison, Reff, Equity, Dividends, or Cascade worksurface up to 84" wide, or one back edge of corner worksurface. Specify three cantilever brackets to support any 24"D Currents, Morrison, Reff, Equity, Dividends or Cascade worksurface greater than 84" wide. Specify two end support brackets to support one end of straight, conference, or arc-shape surface.

Adjustable height cantilever and bridging cantilever brackets support underside of worksurface in 1" increments from 23" to 33"H (24" to 34" top height).

Adjustable bridging cantilever supports adjacent 48"W straight or corner worksurfaces.

End support brackets adjust 23"-33"H (24" to 34" top height). Fixed height brackets support worksurface at 28"H and 29<sup>7</sup>/<sub>8</sub>" H.





Fence end brackets attach to the Currents fence to support one end of rectilinear or one back edge of a corner worksurface when the other ends are properly supported by legs, storage or panel brackets. Refer to the specific worksurface Application Notes for support requirements.

Fence end brackets support the underside of the worksurface in 1" increments from 26" to 28" (27" to 29" top height).



# Worksurface supports freestanding

Currents

description	type	application	w	d	h	pattern no.	paint
 Straight leg	Adjustable		2"	4"	23-29"	<b>AB1 I27A(G/C) ( )</b>	\$330.
	Fixed		2"	4"	27"	<b>AB1 I27F(G/C) ( )</b>	169.
	Low		2"	4"	25"	<b>AB1 I25(G/C) ( )</b>	169.
 C-leg, adjustable	24"D	Left	2"	21"	23-29"	<b>AB1 CL24L ( ) ( )</b>	365.
		Right	2"	21"	23-29"	<b>AB1 CL24R ( ) ( )</b>	365.
	30"D	Left	2"	27"	23-29"	<b>AB1 CL30L ( ) ( )</b>	402.
		Right	2"	27"	23-29"	<b>AB1 CL30R ( ) ( )</b>	402.
 C-leg, fixed height	24"D	Left	2"	21"	27"	<b>AB1 CLF24L ( ) ( )</b>	306.
		Right	2"	21"	27"	<b>AB1 CLF24R ( ) ( )</b>	306.
	30"D	Left	2"	27"	27"	<b>AB1 CLF30L ( ) ( )</b>	335.
		Right	2"	27"	27"	<b>AB1 CLF30R ( ) ( )</b>	335.
 Corner leg	Corner worksurfaces		4"	4"	23-29"	<b>AB1 VL ( ) ( )</b>	306.

Worksurfaces

## Order Code

Example:	<b>AB1 CL24L 612 G</b>
<b>AB1</b>	Support
<b>CL</b>	C-leg
<b>24</b>	Depth
<b>L</b>	Left
<b>612</b>	Finish
<b>G</b>	Glides

## Specification Information

*Specify painted finishes for support column, C-leg, and brackets.*

### *C-Leg casters/glides:*

C	Rear casters/front glides
G	All glides

Casters/glides combination has no levelling. All-glides version provides 1 3/4" levelling range.

## Application Notes

Specify two straight legs under shared worksurface. Straight legs are fixed at 27"H (28" top height) or adjustable 23"-29" (24"-30" top height).


C-legs support one end of any corresponding depth Currents worksurface. Corner legs support only the back corner of a Currents corner worksurface. Specify C-legs for side edges of Currents corner and extended corner worksurfaces.


Adjustable C-legs and corner legs are adjustable in height to support underside of worksurface at 1" increments from 23" to 29" (24" to 30" Currents top height). Fixed height C-legs support desk at 28"H. Fixed height C-legs do not accept service beams.

Straight legs may not be used with Currents universal worksurfaces or Currents worksurfaces for Morrison to create freestanding tables.


# Pedestals *mobile*

Currents


description	type	w	d	h	pattern no.	P1 / P2	P3	V2 front	V3 front
	2 file	15"	17"	26 1/2"	<b>AS1 SFF M ( ) ( )</b>	\$962.	\$1,010.	\$1,085.	\$1,220.
	Data/file	15"	17"	22"	<b>AS1 SDF M ( ) ( )</b>	911.	957.	1,031.	1,166.
	Personal/data/file	15"	17"	26 1/2"	<b>AS1 SPDF M ( ) ( )</b>	1,062.	1,115.	1,204.	1,358.

	2 file	15"	23"	26 1/2"	<b>AS1 DFF M ( ) ( )</b>	1,082.	1,136.	1,205.	1,342.
	Data/file	15"	23"	22"	<b>AS1 DDF M ( ) ( )</b>	1,032.	1,084.	1,151.	1,288.
	Personal/data/file	15"	23"	26 1/2"	<b>AS1 DPDF M ( ) ( )</b>	1,182.	1,242.	1,324.	1,481.

Standard mobile pedestal open top, with pull	Data/file	15"	17"	22"	<b>AS1 SDFO ( ) ( )</b>	850.	893.	969.	1,107.
--	-----------	-----	-----	-----	-------------------------	------	------	------	--------



Deep mobile pedestal open top, with pull	Data/file	15"	23"	22"	<b>AS1 DDFO ( ) ( )</b>	947.	995.	1,066.	1,202.
--	-----------	-----	-----	-----	-------------------------	------	------	--------	--------



## Order Code

Example: **AS1 SDFM 612 612**

<b>AS1</b>	Pedestal
<b>S</b>	Depth
<b>DF</b>	Configuration
<b>M</b>	Mobile
<b>612</b>	Finish for case
<b>612</b>	Finish for fronts

## Specification Information

*Specify painted finish for case, painted or veneer finish for fronts.*

All pedestals include front lock with KnollKey lock system. Personal drawer is 4"H. Data drawer is 7"H. File drawers are 11"H. Deep file drawers include file support for letter (width) or legal (depth) suspended file folders. All drawers have full extension, ball bearing drawer slides.

## Application Notes


Mobile pedestals are independent storage components with locking casters and pull. Standard mobile pedestals roll under Currents worksurfaces set at 28" or higher. Deep mobile pedestals with two files or personal/data/file will not fit under stiffener of universal worksurface or Currents desk set at 29" or lower. Specify data/file mobile pedestal under worksurfaces adjusted lower than 28"H.

# Pedestals *floorstanding*

description	type	w	d	h	pattern no.	P1 / P2	P3	V2 front	V3 front
18"D Floorstanding pedestal	2 file	15"	17"	27"	<b>AS1-SFF G ( ) ( )</b>	\$697.	\$731.	\$818.	\$956.
	personal/data/file	15"	17"	27"	<b>AS1 SPDFG ( ) ( )</b>	797.	838.	938.	1,093.



24"D Floorstanding pedestal	2 file	15"	23"	27"	<b>AS1 DFF G ( ) ( )</b>	792.	833.	916.	1,051.
	personal/data/file	15"	23"	27"	<b>AS1 DPDFG ( ) ( )</b>	894.	938.	1,035.	1,191.





Order Code	Specification Information	Application Notes
Example: <b>AS1 SPDFG 612 612</b>	<i>Specify painted finish for case, painted or veneer finish for fronts.</i>	All pedestals include front lock with KnollKey lock system. Personal drawer is 4"H. Data drawer is 7"H. File drawers are 11"H. Deep file drawers include file support for letter (width) or legal (depth) suspended file folders. All drawers have full extension, ball bearing drawer slides.
<b>AS1</b> Pedestal		
<b>S</b> Depth		
<b>PDF</b> Configuration		
<b>G</b> Floorstanding		
<b>612</b> Finish for case		
<b>612</b> Finish for fronts	Floorstanding pedestals include levelling glides and open top to support one end of a worksurface at 28"H. 18"D pedestals fit under any Currents worksurface with standard stiffener. Deep floorstanding pedestals fit under Currents worksurfaces for Morrison with properly sized replacement worksurface stiffener.	

# Pedestal accessories

Currents

## *pencil tray, drawer divider, file support rail, bumper kits*

description	type	w	d	h	pattern no.	price
Pencil tray 	Personal or data drawer				<b>AS1 PT</b>	\$33.
Drawer divider 	Personal or data drawer				<b>MD6-BD</b>	28.
File support rail	File drawer, set of 2				<b>MD6-FS</b>	11.
Bumper kits for mobile pedestal	21"H pedestal			21"	<b>AS1 BKL</b>	38.
	26"H pedestal			26"	<b>AS1 BKH</b>	46.

### Order Code

Example: **AS1 PT**

**AS1** Pedestal

**PT** Pencil tray

### Specification Information

Pencil tray is black molded plastic.  
Drawer divider is black painted steel.

Replacement worksurface stiffeners are black painted steel.

Bumper kit is trim grey plastic.

### Application Notes

Pencil tray sets in top of personal or data drawer. Moveable dividers organize pencils, pens, and paper clips in separate compartments.

Drawer divider mounts in slots in bottom of personal or data drawer. U-shaped divider supports two rows of four CDs with titles visible in data drawer.


File support spans width of file drawer to support side-to-side letter or legal width suspended files.

Bumper kit protects back corners of mobile pedestals and adjacent furniture. Bumper kit includes two corner-bead shape extrusions with self-adhesive backer.

*cushion*

*fabric*

Description	type	w	d	pattern no.	A	B	C	D	E	F	G	H	I
Cushion	Deep	15"	23"	<b>AS1 DPAD ( )</b>	\$193.	\$216.	\$253.	\$265.	\$289.	\$314.	\$349.	\$386.	\$398.
	Standard	15"	17"	<b>AS1 SPAD ( )</b>	157.	181.	205.	216.	229.	253.	277.	314.	326.



**Order Code**

Example: **AS1 SPAD**

**AS1** Pedestal

**S** Depth

**PAD** Cushion

**Specification Information**

There is a \$68 upcharge on CAL133 backing on the cushion.

Consult the Knoll seating price list for fabric information and grades.

**Application Notes**

Pedestal cushions are for use on Currents open top mobile pedestals as well as on open top mobile pedestals in other Knoll systems lines.

# Pedestal accessories

Currents

*cushion*

*leather*

Description	type	w	d	pattern no.	U	V	W	X	Y
Cushion	Deep	15"	23"	<b>AS1 DPAD ( )</b>	\$386.	\$458.	\$566.	\$591.	\$626.
	Standard	15"	17"	<b>AS1 SPAD ( )</b>	302.	361.	445.	458.	482.



## Order Code

Example: **AS1 SPAD**

AS1 Pedestal

S Depth

PAD Cushion

## Specification Information

There is a \$68 upcharge on CAL133 backing on the cushion.

Consult the Knoll seating price list for leather information and grades.



## Application Notes

Pedestal cushions are for use on Currents open top mobile pedestals as well as on open top mobile pedestals in other Knoll systems lines.

# Vertical storage cabinets

## Reuter rotating door cabinets

Currents

description	type	w	d	h	pattern no.	laminate	paint	V2 front
	painted top	21"	24"	48"	<b>A2 R48 LP ( ) ( ) ( )</b>		\$2,801.	\$3,286.
		21"	24"	64"	<b>A2 R64 LP ( ) ( ) ( )</b>		3,164.	3,774.
	worksurface top, plastic laminate	21"	24"	48"	<b>A2 R48 LL ( ) ( ) ( )</b>	3,043.	n/a	n/a
	worksurface top, veneer	21"	24"	48"	<b>A2 R48 LV ( ) ( ) ( )</b>		3,164.	3,774.
	painted top	21"	24"	48"	<b>A2 R48 RP ( ) ( ) ( )</b>		2,801.	3,286.
		21"	24"	64"	<b>A2 R64 RP ( ) ( ) ( )</b>		3,164.	3,774.
	worksurface top, plastic laminate	21"	24"	48"	<b>A2 R48 RL ( ) ( ) ( )</b>	3,043.	n/a	n/a
	worksurface top, veneer	21"	24"	48"	<b>A2 R48 RV ( ) ( ) ( )</b>		3,164.	3,774.
Accessories	shelf insert				<b>A1 R1 SI</b>		121.	
Replacement top	left				<b>A1 RTOPL ( ) ( )</b>	300.	238.	448.
	right				<b>A1 RTOPR ( ) ( )</b>	300.	238.	448.



Order Code	Specification Information	Application Notes
Example: <b>A2R 64 LP 117 117 117 G</b>	<i>For cabinets, specify:</i>	Rotating door cabinets are portable enclosed freestanding storage. Cabinets feature full-height door, two file drawer frames, and a protected 4 1/2"W wardrobe area. 48"H includes one adjustable shelf, 64"H includes two shelves.
<b>A2R</b> Reuter vertical storage	Top finish	Cabinet top is painted finish. 48"H cabinet is also available with plastic laminate or veneer worksurface top. Cabinets with veneer front are available with painted or veneer top only.
<b>64</b> Height	Case finish	Additional shelves or file drawer frame inserts may be specified separately.
<b>L</b> Left door	Front finish	Painted front cabinets may be changed from left-hand to right-hand in field but replacement top is required.
<b>P</b> Painted top	<i>Casters/glides:</i>	Cabinet width is designed to enable open door in 24"W footprint.
<b>117</b> Top finish	C Casters	
<b>117</b> Case finish	G Glides	
<b>117</b> Front finish	<i>For replacement tops, specify:</i>	
<b>G</b> Glides	<i>Top type</i>	
	P Painted	
	L Plastic laminate	
	V Techgrain® veneer	
	Worksurface top edges are trim grey T-mold.	

Floorstanding storage

# Vertical storage cabinets

## Reuter options rotating door cabinets


Currents


description	type	w	d	h	pattern no.	laminate	paint	V2 front
 Cabinet, left opening door	painted top	21"	24"	48"	<b>A2L 48 LP ( ) ( ) ( )</b>		\$2,409.	\$2,882.
		21"	24"	64"	<b>A2L 64 LP ( ) ( ) ( )</b>		2,764.	3,357.
	worksurface top, plastic laminate	21"	24"	48"	<b>A2L 48 LL ( ) ( ) ( )</b>	2,646.	n/a	n/a
	worksurface top, veneer	21"	24"	48"	<b>A2L 48 LV ( ) ( ) ( )</b>		2,764.	3,357.
 Cabinet, right opening door	painted top	21"	24"	48"	<b>A2L 48 RP ( ) ( ) ( )</b>		2,409.	2,882.
		21"	24"	64"	<b>A2L 64 RP ( ) ( ) ( )</b>		2,764.	3,357.
	worksurface top, plastic laminate	21"	24"	48"	<b>A2L 48 RL ( ) ( ) ( )</b>	2,646.	n/a	n/a
	worksurface top, veneer	21"	24"	48"	<b>A2L 48 RV ( ) ( ) ( )</b>		2,764.	3,357.
Accessories	shelf insert				<b>A1 R1 SI</b>		121.	
Replacement top	left				<b>A1 RTOPL ( ) ( )</b>	300.	238.	448.
	right				<b>A1 RTOPR ( ) ( )</b>	300.	238.	448.


Order Code	Specification Information	Application Notes
Example: <b>A2L 64 LP 117 117 117 G</b>	<i>For cabinets, specify:</i>	Rotating door cabinets are portable enclosed freestanding storage. Cabinets feature full-height door, two file drawer frames, and a protected 4 1/2"W wardrobe area. 48"H includes one adjustable shelf, 64"H includes two shelves.
<b>A2L</b> Reuter vertical storage	Top finish	
<b>64</b> Height	Case finish	Cabinet top is painted finish. 48"H cabinet is also available with plastic laminate or veneer worksurface top. Cabinets with veneer front are available with painted or veneer top only.
<b>L</b> Left door	Front finish	
<b>P</b> Painted top	<i>Casters/glides:</i>	Additional shelves or file drawer frame inserts may be specified separately.
<b>117</b> Top finish	C Casters	
<b>117</b> Case finish	G Glides	Painted front cabinets may be changed from left-hand to right-hand in field but replacement top is required.
<b>117</b> Front finish	<i>For replacement tops, specify:</i>	
<b>G</b> Glides	<i>Top type</i>	Cabinet width is designed to enable open door in 24"W footprint.
	P Painted	
	L Plastic laminate	
	V Techgrain® veneer	
	Worksurface top edges are trim grey T-mold.	




Reuter overhead cabinet  
*desk, wall, or other Knoll system mounted*  
*Designed by Robert Reuter*

description	type	w	d	h	pattern no.	P1	P2	P3	V2
Enclosed cabinet, with lock (no mounting hardware) - One door 		24"	14 1/4"	14 3/4"	<b>RO3-N24( )L</b>	\$591.	\$591.	\$620.	\$891.
		30"	14 1/4"	14 3/4"	<b>RO3-N30( )L</b>	659.	659.	694.	962.
		36"	14 1/4"	14 3/4"	<b>RO3-N36( )L</b>	762.	762.	801.	1,078.
		42"	14 1/4"	14 3/4"	<b>RO3-N42( )L</b>	884.	884.	929.	1,199.
		48"	14 1/4"	14 3/4"	<b>RO3-N48( )L</b>	988.	988.	1,036.	1,316.

Enclosed cabinet, with lock (no mounting hardware) - Two doors 		60"	14 1/4"	14 3/4"	<b>RO3-N60( )L</b>	1,250.	1,250.	1,314.	1,813.
		66"	14 1/4"	14 3/4"	<b>RO3-N66( )L</b>	1,368.	1,368.	1,434.	1,942.
		72"	14 1/4"	14 3/4"	<b>RO3-N72( )L</b>	1,461.	1,461.	1,534.	2,051.

Enclosed cabinet, no lock (no mounting hardware) - One door 		24"	14 1/4"	14 3/4"	<b>RO3-N24( )N</b>	531.	531.	558.	n/a
		30"	14 1/4"	14 3/4"	<b>RO3-N30( )N</b>	602.	602.	633.	n/a
		36"	14 1/4"	14 3/4"	<b>RO3-N36( )N</b>	705.	705.	739.	n/a
		42"	14 1/4"	14 3/4"	<b>RO3-N42( )N</b>	827.	827.	868.	n/a
		48"	14 1/4"	14 3/4"	<b>RO3-N48( )N</b>	928.	928.	974.	n/a

Enclosed cabinet, no lock (no mounting hardware) - Two doors 		60"	14 1/4"	14 3/4"	<b>RO3-N60( )N</b>	1,134.	1,134.	1,190.	n/a
		66"	14 1/4"	14 3/4"	<b>RO3-N66( )N</b>	1,249.	1,249.	1,312.	n/a
		72"	14 1/4"	14 3/4"	<b>RO3-N72( )N</b>	1,347.	1,347.	1,413.	n/a

**Order Code**

Example:	<b>RO3-N48-P-L-613-P-613</b>
<b>RO3</b>	Reuter overhead cabinet
<b>N</b>	No brackets
<b>48</b>	Width
<b>P</b>	With pull
<b>L</b>	With lock
<b>613</b>	Case finish
<b>P</b>	Front finish type
<b>613</b>	Front finish

**Specification Information**

*Specify finish for case and door.*

*Finish types for front:*

P	Painted
V	Veneer

**Application Notes**

Reuter storage is a universal product applicable on Knoll systems.

Cabinet door rotates above cabinet on side pivots, counterbalanced by two pneumatic cylinders. Two-door cabinets have center divider and four pneumatic cylinders. Vertical interior partitions may be positioned on 1 1/2" increments of width anywhere across shelf, 1 1/2" in from each side. Vertical partitions contain cutouts for mounting up to five horizontal partitions at 2" increments on either or both sides.




Horizontals are suspended between two verticals, and may be positioned end-to-end in any combination up to 3" less than cabinet width. Available in sets of 10; 6", 9", 12", 15" widths.

Order locks for overheads with a KnollKey order form. Please note that Reuter overhead cabinets 60"W or wider require two lock cores.

Reuter overhead doors without locks include black, Knoll-logo insert, in the same position. Insert may be removed to retrofit a lock later.

# Reuter open overhead

*Designed by Robert Reuter*




description	type	w	d	h	pattern no.	black	P1	P2	P3	V2
 Open overhead Morrison panel brackets		30"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-OM30( )</b>		\$435.	\$435.	\$458.	
		36"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-OM36( )</b>		498.	498.	523.	
		42"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-OM42( )</b>		563.	563.	591.	
		48"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-OM48( )</b>		626.	626.	658.	
		60"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-OM60( )</b>		729.	729.	764.	
		72"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-OM72( )</b>		856.	856.	900.	
 Open overhead no mounting hardware		30"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-ON30( )</b>		422.	422.	443.	
		36"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-ON36( )</b>		486.	486.	510.	
		42"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-ON42( )</b>		550.	550.	578.	
		48"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-ON48( )</b>		614.	614.	644.	
		60"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-ON60( )</b>		714.	714.	753.	
		72"	13"	14 <sup>3</sup> / <sub>4</sub> "	<b>RO3-ON72( )</b>		843.	843.	885.	
 Interior partitions	Vertical, set of 5	–	11"	12"	<b>RO3-VP</b>	75.				
	Horizontal, set of 10	6"	11"	–	<b>RO1-HP6</b>	115.				
		9"	11"	–	<b>RO1-HP9</b>	146.				
		12"	11"	–	<b>RO1-HP12</b>	173.				
		15"	11"	–	<b>RO1-HP15</b>	202.				
Door retrofit kit, with lock	For open overhead	30"			<b>RO3-RD30( )L</b>	296.	296.	312.	571.	
		36"			<b>RO3-RD36( )L</b>	320.	320.	337.	620.	
		42"			<b>RO3-RD42( )L</b>	373.	373.	391.	673.	
		48"			<b>RO3-RD48( )L</b>	409.	409.	428.	722.	
		60"			<b>RO3-RD60( )L</b>	625.	625.	656.	1,161.	
		72"			<b>RO3-RD72( )L</b>	702.	702.	736.	1,263.	
Door retrofit kit, no lock	For open overhead	30"			<b>RO3-RD30( )N</b>	226.	226.	237.	n/a	
		36"			<b>RO3-RD36( )N</b>	262.	262.	275.	n/a	
		42"			<b>RO3-RD42( )N</b>	316.	316.	332.	n/a	
		48"			<b>RO3-RD48( )N</b>	349.	349.	368.	n/a	
		60"			<b>RO3-RD60( )N</b>	509.	509.	535.	n/a	
		72"			<b>RO3-RD72( )N</b>	587.	587.	616.	n/a	

Order Code	Specification Information	Application Notes
Example: <b>RO3-OM24-612</b>	<i>Specify finish for case and door.</i>	<p>Interior partitions are black painted steel finish.</p> <p>Door retrofit kits convert an open overhead to an enclosed cabinet and include Reuter overhead door, left and right arm mechanisms, and lock or lock plug.</p> <p>Reuter storage is a universal product applicable on Morrison or other Knoll systems. Open overheads may be mounted on any combination of vertical panels the same width or up to 12" less than shelf width.</p> <p>Reuter open overheads may be desk-mounted, mounted on other Knoll systems, cantilevered above panels, or wall-mounted. Specify open overhead with no mounting hardware and brackets separately.</p> <p>Vertical interior partitions may be positioned on 1 1/2" increments of width anywhere across shelf, 1 1/2" in from each side. Vertical partitions contain cutouts for mounting three horizontal partitions at 2" increments on either or both sides. Horizontals are suspended between two verticals, and may be positioned end-to-end in any combination up to 3" less than shelf width. Available in sets of 10; 6", 9", 12", 15" widths.</p>
<b>RO1-O</b> Reuter open overhead		
<b>M</b> Morrison panel mounted		
<b>24</b> Width		
<b>612</b> Finish		

# Reuter open shelf

*Designed by Robert Reuter*

Currents

description	type	w	d	h	pattern no.	black	P1	P2	P3
 Open shelf Morrison panel brackets		24"	13"	8"	<b>RS1-M24( )</b>		\$268.	\$268.	\$281.
		30"	13"	8"	<b>RS1-M30( )</b>		293.	293.	309.
		36"	13"	8"	<b>RS1-M36( )</b>		332.	332.	348.
		42"	13"	8"	<b>RS1-M42( )</b>		358.	358.	375.
		48"	13"	8"	<b>RS1-M48( )</b>		384.	384.	402.
		60"	13"	8"	<b>RS1-M60( )</b>		448.	448.	470.
 Open shelf no mounting hardware		24"	13"	8"	<b>RS1-N24( )</b>		255.	255.	268.
		30"	13"	8"	<b>RS1-N30( )</b>		282.	282.	296.
		36"	13"	8"	<b>RS1-N36( )</b>		320.	320.	337.
		42"	13"	8"	<b>RS1-N42( )</b>		345.	345.	362.
		48"	13"	8"	<b>RS1-N48( )</b>		371.	371.	389.
		60"	13"	8"	<b>RS1-N60( )</b>		435.	435.	458.
 Interior partitions	Vertical, set of 5	–	12"	6"	<b>RS1-VP</b>	70.			
	Horizontal, set of 10	6"	12"	–	<b>RO1-HP6</b>	115.			
		9"	12"	–	<b>RO1-HP9</b>	146.			
		12"	12"	–	<b>RO1-HP12</b>	173.			
		15"	12"	–	<b>RO1-HP15</b>	202.			

Service wall-mounted storage and lighting

## Order Code

Example:	<b>RS1-M48-612</b>
<b>RS1</b>	Reuter shelf
<b>M</b>	Morrison panel mounted
<b>48</b>	Width
<b>612</b>	Finish

## Specification Information

*Specify paint finishes for shelf.*

## Application Notes

Interior partitions are black painted steel finish.


Reuter storage is a universal product applicable on Morrison or other Knoll systems.

Open shelves may be mounted on any combination of vertical panels the same width. Reuter open shelves may be Morrison Network desk-mounted, mounted on other Knoll systems, cantilevered above panels, or wall-mounted. Specify Reuter shelves with no mounting hardware, and brackets separately.

Vertical interior partitions may be positioned on 1 1/2" increments of width anywhere across shelf, 1 1/2" in from each side. Vertical partitions contain cutouts for mounting three horizontal partitions at 2" increments on either or both sides. Horizontals are suspended between two verticals, and may be positioned end-to-end in any combination up to 3" less than shelf width. Available in sets of 10; 6", 9", 12", 15" widths.


Reuter ganging bracket  
*wall-mounting options and ADA pull*  
*Designed by Robert Reuter*

description	type	w	d	h	pattern no.	black
Ganging bracket					<b>RO1-GB</b>	\$12.
ADA pull					<b>RO1-PULL</b>	42.



Order Code	Specification Information	Application Notes
Example: <b>RO1-GB</b>	Wall mount frames are painted black finish.	Wall mount frames secure Reuter overhead cabinet or shelf to wall (frame/wall mounting hardware is not included). Frame is concealed behind storage. Use two RO1-WMF2 to wall-mount 66"- and 72"-wide Reuter overheads.
<b>RO1</b> Reuter overhead	ADA pull is stainless steel.	Reuter open shelves 66" and 72"W are for stanchion support only.
<b>GB</b> Ganging bracket		Wall mount wire manager is two-part wire concealment kit, 22"H (medium grey only). Ganging bracket joins adjacent Reuter overheads or shelves for additional stiffness and alignment when storage is planned on only one side of a panel run.
		ADA pull mounts to Reuter painted front overhead door to allow seated users to close door easily. Specify one for each cabinet 24" - 48", two for cabinets 60" - 72". ADA pull cannot be mounted on wood front Reuter doors.

description	type	w	d	h	pattern no.	black	paint
Morrison Options and Series 2 Morrison overhead downmount brackets and back panel (64"H wall only)		24"			<b>AA1LO24DN( )</b>		\$216.
		30"			<b>AA1LO30DN( )</b>		224.
		36"			<b>AA1LO36DN( )</b>		229.
		42"			<b>AA1LO42DN( )</b>		235.
		48"			<b>AA1LO48DN( )</b>		241.
Morrison shelf downmount brackets (64"H wall only)					<b>AA1RSXDN ( )</b>		156.
Equity overhead brackets	Downmount bracket				<b>AA1EDWS</b>		69.
	Upmount bracket (pair) (64")				<b>AA1ECUP64</b>		216.
	Upmount bracket (pair) (65")				<b>AA1ECUP65</b>		216.
Reuter overhead brackets	Downmount brackets (pair) (64"H wall only)				<b>AA1RODN( )</b>		187.
	Extended upmount brackets (pair) (39"H wall)				<b>AA1ROXUP( )</b>		372.
	Upmount brackets (pair)				<b>AA1ROUP( )</b>		187.
Reuter shelf brackets	Extended downmount brackets (pair) (64"H wall only)				<b>AA1RSXDN( )</b>		156.
	Reuter shelf adapter brackets				<b>RS1 MPB</b>		32.
	Shelf downmount brackets (pair) (39"H or 48"H wall only)				<b>AA1RSDN( )</b>		187.
	Shelf extended upmount brackets (pair) (39"H wall)				<b>AA1RSXUP( )</b>		372.
	Shelf upmount brackets (pair)				<b>AA1RSUP( )</b>		187.



### Order Code

Example:	<b>AA1 LO48 DN 612</b>
<b>AA1</b>	Currents accessory
<b>LO</b>	Options overhead
<b>48</b>	Size
<b>DN</b>	Configuration
<b>612</b>	Finish

### Specification Information

Specify painted finish for shelf downmount brackets and overhead downmount kit.

### Application Notes

**Morrison** downmount brackets support Morrison or Options shelves and brackets on 64"H service wall.

Overhead downmount bracket kits include back panel and brackets to suspend Options overhead cabinets from 64"H service wall crown.

**Equity** downmount bracket attaches an Equity overhead to a 64"H Currents wall. Specify two brackets - one for each end of overhead unit. Upmount brackets are used with 48"H Currents wall and can be specified to align the top of the overhead at 64" or 65" of total height. A back must always be specified for the Equity overhead when mounting on the Currents wall (see Equity price list).

**Reuter** upmount brackets attach overhead cabinet or shelf anywhere along panel crown, lifting 1" above nominal wall height. Extended upmount brackets lift self to 10" above nominal wall height.

Downmount brackets attach overheads within the upper 16" of 64"H walls and open shelves within the upper 9" of 48" or 39"H walls.


Specify an extra bracket (one-half pair) for center support of overhead cabinets wider than 60" and shelves wider than 54".

Upmount or downmount brackets may be inset to permit overhead to extend 1" or 3" and shelf to extend 3" beyond the end of the spine at T-ends.

Extended downmount brackets enable the Reuter open shelf to be mounted from 49"-56"H on 64" service all. Specify shelf adapter brackets separately.

For brackets for use with **Dividends** and Series 2 for Dividends overheads, please consult the Dividends price list.

# T5 Task Light for Reuter Overhead Storage


description	type	w	d	h	pattern no.	Standard List	Advanced List
Task Light 	Use with 24" and wider overhead	19"	4"	1 1/2"	<b>RTAT5E19 ( )</b>	\$194.	n/a
	Use with 30" and wider overhead	25"	4"	1 1/2"	<b>RTAT5E25 ( )</b>	209.	360.
	Use with 42" and wider overhead	37"	4"	1 1/2"	<b>RTAT5E37 ( )</b>	225.	379.
	Use with 60" and wider overhead	49"	4"	1 1/2"	<b>RTAT5E49 ( )</b>	244.	394.
	Use with 66" and wider overhead	61"	4"	1 1/2"	<b>RTAT5E61 ( )</b>	260.	410.

Order Code	Specification Information	Application Notes
Example: RTAT5E19S <hr/> RTA Task Light <hr/> T5 T5 lamp <hr/> E Electronic ballast <hr/> 19 Width <hr/> S Standard	<p><i>Specify:</i></p> <p>Width - Task Lights mount in cabinets and shelves at least 6" wider than light width.</p> <p>Type:</p> <p>S Standard A Advanced</p> <p>Specify suffix -CH and add \$45 list for City of Chicago installations. Example: RTAT5E19S-CH</p> <p>All housings are black.</p>	<p>Task lights mount into the recess in the underside of overhead cabinets and shelves at least 6" wider than task light width.</p> <p>Task lights include T5 cool white (4100K) fluorescent lamp, electronic ballast, 9' grounded corset, prismatic lens, rocker switch, one cord exit management clip and mounting hardware.</p> <p>Task light cordset is center exit. On smaller units cort exit is off-center, but still not handed.</p> <p>Task lights are TCLP compliant and meet requirements of California Title 24.</p> <p>Advanced task lights are fitted with ballast and lamp compliant with LEED requirements.</p>


Portable shelf and counter surface  
*portable shelf and counter surface*

Currents


description	w	d	h	pattern no.	lam.	V2	V3	paint
Portable shelf	24"	13"	15"	<b>AA1PS24( )</b>				\$487.



Counter surface	36"	12"	1"	<b>AW1 CS3612 ( )</b>	219.	327.	439.	
	48"	12"	1"	<b>AW1 CS4812 ( )</b>	243.	365.	487.	
	60"	12"	1"	<b>AW1 CS6012 ( )</b>	268.	402.	536.	
	72"	12"	1"	<b>AW1 CS7212 ( )</b>	292.	439.	583.	



Counter surface bracket kit				<b>AB1 CS ( )</b>				219.
-----------------------------	--	--	--	-------------------	--	--	--	------



Service wall-mounted  
storage and lighting

**Order Code**

Example:	<b>AA1 PS24 612</b>
<b>AA1</b>	Currents accessory
<b>PS</b>	Personal shelf
<b>24</b>	Width
<b>612</b>	Finish

**Specification Information**

*Specify painted finish for shelf or surface finish for counter.*






**Application Notes**

Portable shelf upmounts anywhere along standard height service wall crown. High back provides 13"H x 22"W surround to 12" above crown, with integral handles and simple mounting clamps.

Counter surface with curved front is designed to mount on either side of 39"H wall crown with counter surface brackets. Kit includes two brackets and center support.

# Ambient lighting and awning canopy, uplights and awning

Currents

description	type	w	d	h	watts	pattern no.	light grey	list price
 Canopy uplight	39" H wall	24"	24"	40"	32	<b>AL1 C39</b>	\$1,340.	
	48" H wall	24"	24"	31"	32	<b>AL1 C48</b>	1,340.	
	64" H wall	24"	24"	15"	32	<b>AL1 C64</b>	1,340.	
 Linear uplight, 18"W	39" H wall	18"	8"	30"	72	<b>AL1 A3918</b>	1,340.	
	48" H wall	18"	8"	21"	72	<b>AL1 A4818</b>	1,340.	
	64" H wall	18"	8"	5"	72	<b>AL1 A6418</b>	1,340.	
 Linear uplight, 24"W	39" H wall	24"	8"	30"	100	<b>AL1 A3924</b>	1,826.	
	48" H wall	24"	8"	21"	100	<b>AL1 A4824</b>	1,826.	
	64" H wall	24"	8"	5"	100	<b>AL1 A6424</b>	1,826.	
 Awning uplight	48" or 64"H wall	9"	8"	5"	32	<b>AL1 AA</b>	974.	
 Translucent awning		36"	24"	27"		<b>AA1C36T</b>		608.


Order Code	Specification Information	Application Notes
Example: <b>AL1 C48</b> <b>AL1</b> Lighting <b>C</b> Canopy <b>48</b> Mounting height	<p>Canopy is white perforated aluminum. Light fixtures and posts are light grey finish.</p> <p>Canopy and uplights utilize electronic ballasts, and 9' cordset.</p> <p>Canopy and awning uplight have a single 32 watt tri-biaxial compact fluorescent lamp.</p> <p>18" linear uplight has two 36 watt biaxial compact fluorescent lamps.</p> <p>24" linear uplight has two 50 watt biaxial compact fluorescent lamps.</p> <p>For City of Chicago applications, specify fused cordset (suffix -CH), and add \$82 list.</p> <p><i>Finish for awning brackets:</i> Awning brackets are integral color trim grey finish.</p>	<p>Canopy, linear, and awning uplights attach to standard height service wall crown, on either side at any point. Lights mounted back-to-back allow space between for add-up panels.</p> <p>Canopy and linear uplight include rectangular post to position top of light fixture at 73"H. Awning uplight mounts at 2" above crown for use under awning.</p> <p>Canopy light is designed for interiors with high ceilings.</p> <p>Integral white reflector of canopy is supported at 80"H.</p> <p>Linear ambient uplights are designed for interiors with ceilings from 8' to 10' high.</p> <p>All lights include vertical cord manager from crown to fixture.</p> <p>Consult your Knoll representative for photometric information on Currents ambient lighting.</p>



# Desks

*pin-set adjustable  
extended left*

Currents


description	w (l)	w (r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended left	60"	36"	24-30"	<b>AD C53 SF ( ) ( )</b>	\$1,676.	\$1,985.	\$2,297.
	60"	48"	24-30"	<b>AD C54 SF ( ) ( )</b>	1,801.	2,172.	2,544.
	72"	36"	24-30"	<b>AD C63 SF ( ) ( )</b>	1,801.	2,172.	2,544.
	72"	48"	24-30"	<b>AD C64 SF ( ) ( )</b>	1,924.	2,359.	2,793.
	84"	48"	24-30"	<b>AD C74 SF ( ) ( )</b>	2,049.	2,557.	3,071.
30"D left/24"D right corner desk, extended left	60"	48"	24-30"	<b>AD C54 LF ( ) ( )</b>	1,899.	2,303.	2,704.
	72"	48"	24-30"	<b>AD C64 LF ( ) ( )</b>	2,023.	2,488.	2,954.
	84"	48"	24-30"	<b>AD C74 LF ( ) ( )</b>	2,146.	2,687.	3,121.
30"D both sides corner desk, extended left	60"	48"	24-30"	<b>AD C54 DF ( ) ( )</b>	1,998.	2,499.	2,984.
	72"	48"	24-30"	<b>AD C64 DF ( ) ( )</b>	2,122.	2,650.	3,183.
	84"	48"	24-30"	<b>AD C74 DF ( ) ( )</b>	2,246.	2,811.	3,370.

Order Code	Specification Information	Application Notes
Example: <b>AD C64 LF 117 117 G</b>		
<b>AD</b> Desk	<i>Specify desk shape:</i> C Corner	<i>Specify glides/casters:</i> C Rear casters G Glides
<b>C</b> Shape		
<b>6</b> Width left	<i>Width left/width right:</i> 3 36" 4 48" 5 60" 6 72" 7 84"	Desks incorporate universal worksurface and adjustable C legs. Pin-set desk surface can be set at installation from 24" - 30" high, in 1" increments.
<b>4</b> Width right		Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.
<b>L</b> Depth (30"D left)		Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges. Clearance under worksurfaces (for pedestals, Backpack or other accessories) is 18".
<b>F</b> Base type		
<b>117</b> Desktop finish	<i>Worksurface depth:</i> S 24"D both sides L 30"D left, 24"D right R 30"D right, 24"D left D 30"D both sides	Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.
<b>117</b> Desk base finish	<i>Base type:</i> F Manually adjustable	
<b>G</b> Glides	<i>Specify desk top and base finish.</i>	Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.

Desk, credenzas and worktables

Desks  
*pin-set adjustable*  
*extended right*


Currents

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
24"D both sides corner desk, extended right 	36"	60"	24-30"	<b>AD C35 SF ( ) ( )</b>	\$1,676.	\$1,985.	\$2,297.
	36"	72"	24-30"	<b>AD C36 SF ( ) ( )</b>	1,801.	2,172.	2,544.
	48"	60"	24-30"	<b>AD C45 SF ( ) ( )</b>	1,801.	2,172.	2,544.
	48"	72"	24-30"	<b>AD C46 SF ( ) ( )</b>	1,924.	2,359.	2,793.
	48"	84"	24-30"	<b>AD C47 SF ( ) ( )</b>	2,049.	2,557.	3,071.
30"D right/24"D left corner desk, extended right	48"	60"	24-30"	<b>AD C45 RF ( ) ( )</b>	1,899.	2,303.	2,704.
	48"	72"	24-30"	<b>AD C46 RF ( ) ( )</b>	2,023.	2,488.	2,954.
	48"	84"	24-30"	<b>AD C47 RF ( ) ( )</b>	2,146.	2,687.	3,121.
30"D both sides	48"	60"	24-30"	<b>AD C45 DF ( ) ( )</b>	1,998.	2,499.	2,984.
	48"	72"	24-30"	<b>AD C46 DF ( ) ( )</b>	2,122.	2,650.	3,183.
	48"	84"	24-30"	<b>AD C47 DF ( ) ( )</b>	2,246.	2,811.	3,370.

Order Code	Specification Information	Application Notes
Example: <b>AD C46 SF 117 117 G</b>	<i>Specify desk shape:</i>	<i>Specify glides/casters:</i>
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left/width right:</i>	Worksurface edges are trim grey.
<b>4</b> Width left	3 36"	
<b>6</b> Width right	4 48"	
<b>S</b> Depth (24" both sides)	5 60"	
<b>F</b> Base type	6 72"	
<b>117</b> Desktop finish	7 84"	Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.
<b>117</b> Desk base finish	<i>Worksurface depth:</i>	
<b>G</b> Glides	S 24"D both sides	
	L 30"D left, 24"D right	
	R 30"D right, 24"D left	Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges. Clearance under worksurfaces (for pedestals, BackPack or other accessories) is 18".
	D 30"D both sides	
	<i>Base type:</i>	Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.
	F Manually adjustable	
	<i>Specify desk top and base finish.</i>	Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.

Desks  
pin-set adjustable  
corner desk


Currents

description	w(l)	w(r)	h	pattern number	lam.	V2	V3
24"D both sides corner desk 	42"	42"	24-30"	<b>AD C4242 SF ( ) ( )</b>	\$1,614.	\$1,893.	\$2,172.
	48"	48"	24-30"	<b>AD C44 SF ( ) ( )</b>	1,676.	1,985.	2,297.
	60"	60"	24-30"	<b>AD C55 SF ( ) ( )</b>	1,862.	n/a	n/a
30"D left/24"D right corner desk	42"	42"	24-30"	<b>AD C4242 LF ( ) ( )</b>	1,652.	1,930.	2,211.
	48"	48"	24-30"	<b>AD C44 LF ( ) ( )</b>	1,713.	2,023.	2,333.
	60"	60"	24-30"	<b>AD C55 LF ( ) ( )</b>	1,899.	n/a	n/a
24"D left/30"D right corner desk	42"	42"	24-30"	<b>AD C4242 RF ( ) ( )</b>	1,652.	1,930.	2,211.
	48"	48"	24-30"	<b>AD C44 RF ( ) ( )</b>	1,713.	2,023.	2,333.
	60"	60"	24-30"	<b>AD C55 RF ( ) ( )</b>	1,899.	n/a	n/a
30"D both sides corner desk	42"	42"	24-30"	<b>AD C4242 DF ( ) ( )</b>	1,689.	1,968.	2,247.
	48"	48"	24-30"	<b>AD C44 DF ( ) ( )</b>	1,750.	2,059.	2,370.
	60"	60"	24-30"	<b>AD C55 DF ( ) ( )</b>	1,936.	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>AD C44 LF 117 117 G</b>	<i>Specify desk shape:</i>	<i>Specify glides/casters:</i>
<b>AD</b> Desk	C Corner	C Rear casters
<b>C</b> Shape	<i>Width left/width right:</i>	G Glides
<b>4</b> Width left	4 48"	Worksurface edges are trim grey.
<b>4</b> Width right	5 60"	Clear Maple not available on 60"W x 60"D corner desks.
<b>L</b> Depth (30"D left)	<i>Worksurface depth:</i>	Corner desks provide up to 45" diagonal depth for large monitors, keyboard and mouse. Nominal worksurface depths include 1 3/4" cable/connector space along back edge. Clearance under worksurfaces (for pedestals, Backpack or other accessories) is 18".
<b>F</b> Base type	S 24"D both sides	Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.
<b>117</b> Desktop finish	L 30"D left, 24"D right	Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.
<b>117</b> Desk base finish	R 30"D right, 24"D left	
<b>G</b> Glides	D 30"D both sides	
	<i>Base type:</i>	
	F Manually adjustable	
	<i>Specify desk top and base finish.</i>	

Desk, credenzas and worktables

Desks  
*pin-set adjustable  
 straight desk*

description	w(l)	w(r)	h	pattern number	lam.	V2	V3
 24"D straight desk, curved front	36"	24"	24-30"	<b>AD S36 SF</b> ( ) ( )	\$1,043.	\$1,192.	\$1,341.
	42"	24"	24-30"	<b>AD S42 SF</b> ( ) ( )	1,069.	1,229.	1,390.
	48"	24"	24-30"	<b>AD S48 SF</b> ( ) ( )	1,091.	1,267.	1,439.
	60"	24"	24-30"	<b>AD S60 SF</b> ( ) ( )	1,142.	1,341.	1,539.
	72"	24"	24-30"	<b>AD S72 SF</b> ( ) ( )	1,192.	1,413.	1,639.
	84"	24"	24-30"	<b>AD S84 SF</b> ( ) ( )	1,241.	1,489.	1,737.
30"D straight desk, curved front	36"	30"	24-30"	<b>AD S36 DF</b> ( ) ( )	1,154.	1,322.	1,489.
	42"	30"	24-30"	<b>AD S42 DF</b> ( ) ( )	1,179.	1,285.	1,539.
	48"	30"	24-30"	<b>AD S48 DF</b> ( ) ( )	1,204.	1,398.	1,588.
	60"	30"	24-30"	<b>AD S60 DF</b> ( ) ( )	1,267.	1,489.	1,713.
	72"	30"	24-30"	<b>AD S72 DF</b> ( ) ( )	1,341.	1,602.	1,862.

Order Code	Specification Information	Application Notes
Example: <b>AD S48 DF 117 117 G</b>	<i>Specify desk shape:</i>	<i>Specify glides/casters:</i>
<b>AD</b> Desk	S Straight	C Rear casters
<b>S</b> Shape		G Glides
<b>48</b> Width	<i>Worksurface depth:</i>	
<b>D</b> Depth	S 24"D both sides	Worksurface edges are trim grey.
<b>F</b> Base type	D 30"D both sides	
<b>117</b> Desktop finish	<i>Base type:</i>	
<b>117</b> Desk base finish	F Manually adjustable	
<b>G</b> Glides	<i>Specify desk top and base finish.</i>	

Desks incorporate universal worksurface and adjustable C legs. Pin-set desk surface can be set at installation from 24" - 30" high, in 1" increments.


Straight desks have slightly curved front edges, to a maximum of 1" extra depth at the center. Nominal worksurface depths include 1 3/4" cable/connector space along back edge. Clearance under worksurfaces (for pedestals, BackPack or other accessories) is 18".

Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.

Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.


# Desks

*handcrank adjustable  
extended left*

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended left	60"	36"	24-34"	<b>AD C53 SH ( ) ( )</b>	\$2,544.	\$2,856.	\$3,166.
	60"	48"	24-34"	<b>AD C54 SH ( ) ( )</b>	2,669.	3,041.	3,413.
	72"	36"	24-34"	<b>AD C63 SH ( ) ( )</b>	2,669.	3,041.	3,413.
	72"	48"	24-34"	<b>AD C64 SH ( ) ( )</b>	2,793.	3,226.	3,661.
	84"	48"	24-34"	<b>AD C74 SH ( ) ( )</b>	2,918.	3,413.	3,910.
30"D left/24"D right corner desk, extended left	60"	48"	24-34"	<b>AD C54 LH ( ) ( )</b>	2,767.	3,171.	3,573.
	72"	48"	24-34"	<b>AD C64 LH ( ) ( )</b>	2,892.	3,357.	3,822.
	84"	48"	24-34"	<b>AD C74 LH ( ) ( )</b>	3,016.	3,543.	4,072.
30"D both sides corner desk, extended left	60"	48"	24-34"	<b>AD C54 DH ( ) ( )</b>	2,767.	3,171.	3,573.
	72"	48"	24-34"	<b>AD C64 DH ( ) ( )</b>	2,892.	3,357.	3,822.
	84"	48"	24-34"	<b>AD C74 DH ( ) ( )</b>	3,016.	3,543.	4,072.

Order Code	Specification Information	Application Notes
Example: <b>AD C53 SH 117 117 G</b>	<i>Specify desk shape:</i>	<p>Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge. Handcrank is located on the extended side of desks.</p> <p>Integral cable tray under worksurface and channels in legs provide basic lay-in wire management. Crossbeam stiffens legs through upper height range. Crossbeam is 4"H, 14" above floor.</p> <p>Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.</p> <p>Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.</p> <p>Handcrank mechanism is rated at 300 lbs. maximum weight.</p> <p>Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.</p>
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left, width right:</i>	
<b>5</b> Width left	3 36"	
<b>3</b> Width right	4 48"	
<b>S</b> Depth	5 60"	
<b>H</b> Base type	6 72"	
<b>117</b> Desktop finish	7 84"	
<b>117</b> Base finish	<i>Worksurface depth:</i>	
<b>G</b> Glides	S 24"D both sides L 30"D left, 24"D right R 30"D right, 24"D left D 30"D both sides	
	<i>Base type:</i>	
	H Handcrank adjustable	
	<i>Specify desk top and base finish.</i>	

Desks  
handcrank adjustable  
extended right


description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended right	36"	60"	24-34"	AD C35 SH ( ) ( )	\$2,544.	\$2,856.	\$3,166.
	36"	72"	24-34"	AD C36 SH ( ) ( )	2,669.	3,041.	3,413.
	48"	60"	24-34"	AD C45 SH ( ) ( )	2,669.	3,041.	3,413.
	48"	72"	24-34"	AD C46 SH ( ) ( )	2,793.	3,226.	3,661.
	48"	84"	24-34"	AD C47 SH ( ) ( )	2,918.	3,413.	3,910.
30"D right/24"D left corner desk, extended left	48"	60"	24-34"	AD C45 RH ( ) ( )	2,767.	3,171.	3,573.
	48"	72"	24-34"	AD C46 RH ( ) ( )	2,892.	3,357.	3,822.
	48"	84"	24-34"	AD C47 RH ( ) ( )	3,016.	3,543.	4,072.
30"D both sides corner desk, extended left	48"	60"	24-34"	AD C45 DH ( ) ( )	2,767.	3,171.	3,573.
	48"	72"	24-34"	AD C46 DH ( ) ( )	2,892.	3,357.	3,822.
	48"	84"	24-34"	AD C47 DH ( ) ( )	3,016.	3,543.	4,072.

Order Code	Specification Information	Application Notes
Example: <b>AD C35 SH 117 117 G</b>	<i>Specify desk shape:</i>	<p>Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge. Handcrank is located on the extended side of desks.</p> <p>Integral cable tray under worksurface and channels in legs provide basic lay-in wire management. Crossbeam stiffens legs through upper height range. Crossbeam is 4"H, 14" above floor.</p> <p>Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.</p> <p>Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.</p> <p>Handcrank mechanism is rated at 300 lbs. maximum weight.</p> <p>Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.</p>
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left, width right:</i>	
<b>3</b> Width left	3 36"	
<b>5</b> Width right	4 48"	
<b>S</b> Depth	5 60"	
<b>H</b> Base type	6 72"	
<b>117</b> Desktop finish	7 84"	
<b>117</b> Base finish	<i>Worksurface depth:</i>	
<b>G</b> Glides	S 24"D both sides L 30"D left, 24"D right R 30"D right, 24"D left D 30"D both sides	
	<i>Base type:</i>	
	H Handcrank adjustable	
	<i>Specify desk top and base finish.</i>	

# Desks

## *handcrank adjustable corner desk*

Currents

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk	42"	42"	24-34"	<b>AD C4242 SH ( ) ( )</b>	\$2,436.	\$2,712.	\$2,993.
	48"	48"	24-34"	<b>AD C44 SH ( ) ( )</b>	2,544.	2,856.	3,166.
	60"	60"	24-34"	<b>AD C55 SH ( ) ( )</b>	2,730.	n/a	n/a
30"D left/24"D right corner desk	42"	42"	24-34"	<b>AD C4242 LH ( ) ( )</b>	2,472.	2,750.	3,065.
	48"	48"	24-34"	<b>AD C44 LH ( ) ( )</b>	2,580.	2,892.	3,201.
	60"	60"	24-34"	<b>AD C55 LH ( ) ( )</b>	2,767.	n/a	n/a
24"D left/30"D right corner desk	42"	42"	24-34"	<b>AD C4242 RH ( ) ( )</b>	2,472.	2,750.	3,065.
	48"	48"	24-34"	<b>AD C44 RH ( ) ( )</b>	2,580.	2,892.	3,201.
	60"	60"	24-34"	<b>AD C55 RH ( ) ( )</b>	2,767.	n/a	n/a
30"D both sides corner desk	48"	48"	24-34"	<b>AD C44 DH ( ) ( )</b>	2,619.	2,929.	3,240.
	60"	60"	24-34"	<b>AD C55 DH ( ) ( )</b>	2,806.	n/a	n/a

### Order Code

Example:	<b>AD C44 SH 117 117 G</b>
<b>AD</b>	Desk
<b>C</b>	Shape
<b>4</b>	Width left
<b>4</b>	Width right
<b>S</b>	Depth
<b>H</b>	Base type
<b>117</b>	Desktop finish
<b>117</b>	Base finish
<b>G</b>	Glides

### Specification Information

<i>Specify desk shape:</i>	
C	Corner
<i>Width left, width right:</i>	
4	48"
5	60"
<i>Worksurface depth:</i>	
S	24"D both sides
L	30"D left, 24"D right
R	30"D right, 24"D left
D	30"D both sides
<i>Base type:</i>	
H	Handcrank adjustable
<i>Specify desk top and base finish.</i>	

### Application Notes

*Specify:*

C Rear casters  
G Glides

Worksurface edges are trim grey. Clear Maple is not available on 60"W x 60"D corner desks.

Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge.


Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field. Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.

Corner desks provide up to 45" diagonal depth for large monitors, keyboard and mouse. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.

Handcrank mechanism is rated at 300 lbs. maximum weight.

Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.

Desks  
handcrank adjustable  
straight desk


description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D straight desk, curved front	36"	24"	24-34"	<b>AD S36 SH</b> ( ) ( )	\$1,662.	\$1,812.	\$1,961.
	42"	24"	24-34"	<b>AD S42 SH</b> ( ) ( )	1,688.	1,849.	2,011.
	48"	24"	24-34"	<b>AD S48 SH</b> ( ) ( )	1,713.	1,888.	2,059.
	60"	24"	24-34"	<b>AD S60 SH</b> ( ) ( )	1,763.	1,961.	2,160.
	72"	24"	24-34"	<b>AD S72 SH</b> ( ) ( )	1,812.	2,035.	2,259.
	84"	24"	24-34"	<b>AD S84 SH</b> ( ) ( )	1,862.	2,110.	2,359.
30"D straight desk, curved front	36"	30"	24-34"	<b>AD S36 DH</b> ( ) ( )	1,775.	1,942.	2,110.
	42"	30"	24-34"	<b>AD S42 DH</b> ( ) ( )	1,801.	1,979.	2,160.
	48"	30"	24-34"	<b>AD S48 DH</b> ( ) ( )	1,823.	2,018.	2,210.
	60"	30"	24-34"	<b>AD S60 DH</b> ( ) ( )	1,888.	2,110.	2,333.
	72"	30"	24-34"	<b>AD S72 DH</b> ( ) ( )	1,961.	2,221.	2,482.

Order Code	Specification Information	Application Notes
Example: <b>AD S48 DH 117 117 G</b> <b>AD</b> Desk <b>S</b> Shape <b>48</b> Width <b>D</b> Depth <b>H</b> Base type <b>117</b> Desktop finish <b>117</b> Base finish <b>G</b> Glides	<i>Specify desk shape:</i> S Straight  <i>For straight desks specify:</i> <i>Width:</i> 36 36" 42 42" 48 48" 60 60" 72 72" 84 84"  <i>Worksurface depth:</i> S 24"D D 30"D  <i>Base type:</i> H Handcrank adjustable  <i>Specify desk top and base finish.</i>	<i>Specify:</i> C Rear casters G Glides  Worksurface edges are trim grey.  Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge. Hand crank may be installed on the left or right side of any straight or symmetrical corner desk.  Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel. Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.  Straight desks have slightly curved front edges, to a maximum of 1" extra depth at the center. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.  Handcrank mechanism is rated at 300 lbs. maximum weight.  Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.



Desks with service beam  
*pin-set adjustable*  
*extended left*

Currents


description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
24"D both sides corner desk, with beam extended left 	60"	36"	24-30"	<b>AD C53 SB</b> ( ) ( )	\$2,396.	\$2,704.	\$3,016.
	60"	48"	24-30"	<b>AD C54 SB</b> ( ) ( )	2,557.	2,929.	3,301.
	72"	36"	24-30"	<b>AD C63 SB</b> ( ) ( )	2,557.	2,929.	3,301.
	72"	48"	24-30"	<b>AD C64 SB</b> ( ) ( )	2,720.	3,152.	3,588.
	84"	48"	24-30"	<b>AD C74 SB</b> ( ) ( )	3,028.	3,537.	4,052.
30"D left/24"D right corner desk, with beam extended left	60"	48"	24-30"	<b>AD C54 LB</b> ( ) ( )	2,655.	3,060.	3,462.
	72"	48"	24-30"	<b>AD C64 LB</b> ( ) ( )	2,816.	3,282.	3,748.
	84"	48"	24-30"	<b>AD C74 LB</b> ( ) ( )	3,127.	3,667.	4,101.
30"D both sides corner desk, with beam extended left	60"	48"	24-30"	<b>AD C54 DB</b> ( ) ( )	2,978.	3,481.	3,966.
	72"	48"	24-30"	<b>AD C64 DB</b> ( ) ( )	3,101.	3,629.	4,163.
	84"	48"	24-30"	<b>AD C74 DB</b> ( ) ( )	3,225.	3,791.	4,349.

Order Code	Specification Information	Application Notes
Example: <b>AD C64 SB 117 117 G</b>	<i>Specify desk shape:</i>	<p>Desks with service beam have power distribution capability, separate lay-in wire management, and sockets for privacy screens. Pin-set worksurface can be installed at 24" - 30" high, in 1" increments.</p> <p>Beam provides privacy screen support, modular power distribution, lay-in cable distribution, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.</p> <p>Extended corner desks provide computer corner plus adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges.</p> <p>Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel.</p> <p>Corner desk beams have four openings for Knoll PDC modules. Specify power distribution components separately.</p> <p>Desks accept clamp-on workshelves.</p>
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left, width right:</i>	
<b>6</b> Width left	3 36"	
<b>4</b> Width right	4 48"	
<b>S</b> Depth	5 60"	
<b>B</b> Base type	6 72"	
<b>117</b> Desktop finish	7 84"	
<b>117</b> Desk base finish	<i>Worksurface depth:</i>	
<b>G</b> Glides	S 24"D both sides L 30"D left, 24"D right R 30"D right, 24"D left D 30"D both sides	
	<i>Base type:</i>	
	B Adjustable with beam	
	<i>Specify desk top and base finish.</i>	
	<i>Specify:</i>	
	C Rear casters	
	G Glides	
	Worksurface edges are trim grey.	

Desk, credenzas and worktables


Desks with service beam  
*pin-set adjustable*  
*extended right*

Currents

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
24"D both sides corner desk, with beam extended right 	36"	60"	24-30"	<b>AD C35 SB ( ) ( )</b>	\$2,396.	\$2,704.	\$3,016.
	36"	72"	24-30"	<b>AD C36 SB ( ) ( )</b>	2,557.	2,929.	3,301.
	48"	60"	24-30"	<b>AD C45 SB ( ) ( )</b>	2,557.	2,929.	3,301.
	48"	72"	24-30"	<b>AD C46 SB ( ) ( )</b>	2,720.	3,152.	3,588.
	48"	84"	24-30"	<b>AD C47 SB ( ) ( )</b>	3,028.	3,537.	4,052.
30"D right/24"D left corner desk, with beam extended right	48"	60"	24-30"	<b>AD C45 RB ( ) ( )</b>	2,655.	3,060.	3,462.
	48"	72"	24-30"	<b>AD C46 RB ( ) ( )</b>	2,816.	3,282.	3,748.
	48"	84"	24-30"	<b>AD C47 RB ( ) ( )</b>	3,127.	3,667.	4,101.
30"D both sides corner desk, with beam extended right	48"	60"	24-30"	<b>AD C45 DB ( ) ( )</b>	2,978.	3,481.	3,966.
	48"	72"	24-30"	<b>AD C46 DB ( ) ( )</b>	3,101.	3,629.	4,163.
	48"	84"	24-30"	<b>AD C47 DB ( ) ( )</b>	3,225.	3,791.	4,349.

Order Code	Specification Information	Application Notes
Example: <b>AD C46 SB 117 117 G</b>	<i>Specify desk shape:</i>	Desks with service beam have power distribution capability, separate lay-in wire management, and sockets for privacy screens. Pin-set worksurface can be installed at 24" - 30" high, in 1" increments.  Beam provides privacy screen support, modular power distribution, lay-in cable distribution, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.  Extended corner desks provide computer corner plus adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges.  Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel.  Corner desk beams have four openings for Knoll PDC modules. Specify power distribution components separately.  Desks accept clamp-on workshelves.
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left, width right:</i>	
<b>4</b> Width left	3 36"	
<b>6</b> Width right	4 48"	
<b>S</b> Depth	5 60"	
<b>B</b> Base type	6 72"	
<b>117</b> Desktop finish	7 84"	
<b>117</b> Desk base finish	<i>Worksurface depth:</i>	
<b>G</b> Glides	S 24"D both sides L 30"D left, 24"D right R 30"D right, 24"D left D 30"D both sides	
	<i>Base type:</i>	
	B Adjustable with beam	
	<i>Specify desk top and base finish.</i>	
	<i>Specify:</i>	
	C Rear casters	
	G Glides	
	Worksurface edges are trim grey.	

Desks with service beam  
*pin-set adjustable*  
*corner desk*


description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk with beam	42"	42"	24-30"	<b>AD C4242 SB ( ) ( )</b>	\$2,386.	\$2,664.	\$2,944.
	48"	48"	24-30"	<b>AD C44 SB ( ) ( )</b>	2,396.	2,704.	3,016.
	60"	60"	24-30"	<b>AD C55 SB ( ) ( )</b>	2,619.	n/a	n/a
30"D left/24"D right corner desk with beam	42"	42"	24-30"	<b>AD C4242 LB ( ) ( )</b>	2,423.	2,701.	2,981.
	48"	48"	24-30"	<b>AD C44 LB ( ) ( )</b>	2,434.	2,742.	3,053.
	60"	60"	24-30"	<b>AD C55 LB ( ) ( )</b>	2,655.	n/a	n/a
24"D left/30"D right corner desk with beam	42"	42"	24-30"	<b>AD C4242 RB ( ) ( )</b>	2,423.	2,701.	2,981.
	48"	48"	24-30"	<b>AD C44 RB ( ) ( )</b>	2,434.	2,742.	3,053.
	60"	60"	24-30"	<b>AD C55 RB ( ) ( )</b>	2,655.	n/a	n/a
30"D both sides corner desk with beam	42"	42"	24-30"	<b>AD C4242 DB ( ) ( )</b>	2,460.	2,738.	3,018.
	48"	48"	24-30"	<b>AD C44 DB ( ) ( )</b>	2,592.	2,780.	3,091.
	60"	60"	24-30"	<b>AD C55 DB ( ) ( )</b>	2,694.	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>AD C44 SB 117 117 G</b>	<i>Specify desk shape:</i>	Desks with service beam have power distribution capability, separate lay-in wire management, and sockets for privacy screens. Pin-set worksurface can be installed at 24"- 30" high, in 1" increments.  Beam provides excess cord storage, continuous power and lay-in cable distribution, privacy screen support, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.  Nominal worksurface depths include 1 3/4" cable/connector space at back edge.  Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel.  Corner desk beams have four openings for Knoll PDC modules. Specify power distribution components separately.  Desks accept clamp-on workshelves.
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left, width right:</i>	
<b>4</b> Width left	4 48"	
<b>4</b> Width right	5 60"	
<b>S</b> Depth	<i>Worksurface depth:</i>	
<b>B</b> Base type	S 24"D both sides	
<b>117</b> Desktop finish	L 30"D left, 24"D right	
<b>117</b> Desk base finish	R 30"D right, 24"D left	
<b>G</b> Glides	D 30"D both sides	
	<i>Base type:</i>	
	B Adjustable with beam	
	<i>Specify desk top and base finish.</i>	

Desk, credenzas and worktables


Desks with service beam  
*pin-set adjustable*  
*straight desk*

Currents

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D straight desk, curved front	36"	24"	24-30"	<b>AD S36 SB</b> ( ) ( )	\$1,353.	\$1,500.	\$1,650.
	42"	24"	24-30"	<b>AD S42 SB</b> ( ) ( )	1,398.	1,558.	1,720.
	48"	24"	24-30"	<b>AD S48 SB</b> ( ) ( )	1,439.	1,613.	1,787.
	60"	24"	24-30"	<b>AD S60 SB</b> ( ) ( )	1,526.	1,725.	1,924.
	72"	24"	24-30"	<b>AD S72 SB</b> ( ) ( )	1,613.	1,837.	2,059.
	84"	24"	24-30"	<b>AD S84 SB</b> ( ) ( )	1,795.	2,045.	2,291.
30"D straight desk, curved front	36"	30"	24-30"	<b>AD S36 DB</b> ( ) ( )	1,463.	1,632.	1,801.
	42"	30"	24-30"	<b>AD S42 DB</b> ( ) ( )	1,509.	1,688.	1,868.
	48"	30"	24-30"	<b>AD S48 DB</b> ( ) ( )	1,552.	1,743.	1,936.
	60"	30"	24-30"	<b>AD S60 DB</b> ( ) ( )	1,650.	1,874.	2,099.
	72"	30"	24-30"	<b>AD S72 DB</b> ( ) ( )	1,763.	2,023.	2,283.


Order Code	Specification Information	Application Notes
Example: <b>AD S72 DB 117 117 G</b>	<i>Specify desk shape:</i>	<p>Desks with service beam have power distribution capability, separate lay-in wire management, and sockets for privacy screens. Pin-set worksurface can be installed at 24" - 30" high, in 1" increments.</p> <p>Beam provides excess cord storage, continuous power and lay-in cable distribution, privacy screen support, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.</p> <p>Straight desks have slightly curved front edge, to a minimum of 1" extra depth at center. Nominal worksurface depths include 1 3/4" cable/connector space at back edge.</p> <p>Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel.</p> <p>Straight desk beams have two openings for Knoll PDC modules. Specify power distribution components separately.</p> <p>Desks accept clamp-on workshelves.</p>
<b>AD</b> Desk	S Straight	
<b>S</b> Shape	<i>For straight desks specify:</i>	
<b>72</b> Width	<i>Width:</i>	
<b>D</b> Depth	36 36"	
<b>B</b> Base type	42 42"	
<b>117</b> Desktop finish	48 48"	
<b>117</b> Desk base finish	60 60"	
<b>G</b> Glides	72 72"	
	84 84"	
	<i>Worksurface depth:</i>	
	S 24"D	
	D 30"D	
	<i>Base type:</i>	
	B Adjustable with beam	
	<i>Specify desk top and base finish.</i>	
	<i>Specify:</i>	
	C Rear casters	
	G Glides	
	Worksurface edges are trim grey.	

Desks with service beam  
handcrank-adjustable  
extended left

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended left	60"	36"	24-34"	<b>AD C53 SA ( ) ( )</b>	\$3,265.	\$3,573.	\$3,885.
	60"	48"	24-34"	<b>AD C54 SA ( ) ( )</b>	3,426.	3,798.	4,170.
	72"	36"	24-34"	<b>AD C63 SA ( ) ( )</b>	3,426.	3,798.	4,170.
	72"	48"	24-34"	<b>AD C64 SA ( ) ( )</b>	3,588.	4,021.	4,455.
	84"	48"	24-34"	<b>AD C74 SA ( ) ( )</b>	3,897.	4,392.	4,890.
30"D left/24"D right corner desk, extended left	60"	48"	24-34"	<b>AD C54 LA ( ) ( )</b>	3,525.	3,928.	4,332.
	72"	48"	24-34"	<b>AD C64 LA ( ) ( )</b>	3,686.	4,152.	4,618.
	84"	48"	24-34"	<b>AD C74 LA ( ) ( )</b>	3,996.	4,524.	5,052.
30"D both sides corner desk, extended left	60"	48"	24-34"	<b>AD C54 DA ( ) ( )</b>	3,636.	4,040.	4,441.
	72"	48"	24-34"	<b>AD C64 DA ( ) ( )</b>	3,810.	4,274.	4,740.
	84"	48"	24-34"	<b>AD C74 DA ( ) ( )</b>	3,996.	4,524.	5,052.


Order Code	Specification Information	Application Notes
Example: <b>AD C64 SA 117 117 C</b>	<i>Specify desk shape:</i>	<i>Specify:</i>
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left, width right:</i>	G Glides
<b>6</b> Width left	3 36"	Worksurface edges are trim grey.
<b>4</b> Width right	4 48"	
<b>S</b> Depth	5 60"	
<b>A</b> Base type	6 72"	
<b>117</b> Desktop finish	7 84"	Handcrank desks with service beam are mobile, adjustable desks with integral wire management, power distribution capability, and privacy screen inserts.
<b>117</b> Base finish	<i>Worksurface depth:</i>	
<b>C</b> Casters	S 24"D both sides	
	D 30"D both sides	
	L 30"D left, 24"D right	
	R 30"D right, 24"D left	Handcrank adjustable desk adjusts continuously from 24-34"H with collapsible crank under front edge. Handcrank is located on the extended side of extended corner desks.
	<i>Base type:</i>	
	A Handcrank adjustable with beam	
	<i>Specify desk top and base finish.</i>	Beam provides privacy screen support, modular power distribution, lay-in cable power distribution, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.
		Extended corner desks provide computer corner plus adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges.
		Desks may be specified on fixed front glides and rear casters or 2 1/4" adjustable levelling glides with 1 3/4" travel.
		Corner desk beams have four openings for Knoll PDC modules.
		Handcrank mechanism is rated at 300 lbs. maximum weight.

Desks with service beam  
handcrank-adjustable  
extended right

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended right	36"	60"	24-34"	AD C35 SA ( ) ( )	\$3,265.	\$3,573.	\$3,885.
	36"	72"	24-34"	AD C36 SA ( ) ( )	3,426.	3,798.	4,170.
	48"	60"	24-34"	AD C45 SA ( ) ( )	3,426.	3,798.	4,170.
	48"	72"	24-34"	AD C46 SA ( ) ( )	3,588.	4,021.	4,455.
	48"	84"	24-34"	AD C47 SA ( ) ( )	3,897.	4,392.	4,890.
30"D right/24"D left corner desk, extended right	48"	60"	24-34"	AD C45 RA ( ) ( )	3,525.	3,928.	4,332.
	48"	72"	24-34"	AD C46 RA ( ) ( )	3,686.	4,152.	4,618.
	48"	84"	24-34"	AD C47 RA ( ) ( )	3,996.	4,524.	5,052.
30"D both sides corner desk, extended right	48"	60"	24-34"	AD C45 DA ( ) ( )	3,636.	4,040.	4,441.
	48"	72"	24-34"	AD C46 DA ( ) ( )	3,810.	4,274.	4,740.
	48"	84"	24-34"	AD C47 DA ( ) ( )	3,996.	4,524.	5,052.


Order Code	Specification Information	Application Notes	
Example: <b>AD C46 SA 117 117 C</b>	<i>Specify desk shape:</i>	<i>Specify:</i> C Rear casters G Glides	
<b>AD</b> Desk	C Corner		
<b>C</b> Shape	<i>Width left, width right:</i>	Worksurface edges are trim grey.	
<b>4</b> Width left	3 36"		
<b>6</b> Width right	4 48"		
<b>S</b> Depth	5 60"		
<b>A</b> Base type	6 72"		
<b>117</b> Desktop finish	7 84"	Handcrank desks with service beam are mobile, adjustable desks with integral wire management, power distribution capability, and privacy screen inserts.	
<b>117</b> Base finish	<i>Worksurface depth:</i>		Handcrank adjustable desk adjusts continuously from 24-34"H with collapsible crank under front edge. Handcrank is located on the extended side of extended corner desks.
<b>C</b> Casters	S 24"D both sides		
	D 30"D both sides		
	L 30"D left, 24"D right		
	R 30"D right, 24"D left	Beam provides privacy screen support, modular power distribution, lay-in cable power distribution, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.	
	<i>Base type:</i>		
	A Handcrank adjustable with beam	Extended corner desks provide computer corner plus adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges.	
	<i>Specify desk top and base finish.</i>		
		Desks may be specified on fixed front glides and rear casters or 2 1/4" adjustable levelling glides with 1 3/4" travel.	
		Corner desk beams have four openings for Knoll PDC modules.	
		Handcrank mechanism is rated at 300 lbs. maximum weight.	

Desks with service beam  
handcrank-adjustable  
corner desk

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk	42"	42"	24-34"	AD C4242 SA ( ) ( )	\$3,254.	\$3,509.	\$3,813.
	48"	48"	24-34"	AD C44 SA ( ) ( )	3,265.	3,573.	3,885.
	60"	60"	24-34"	AD C55 SA ( ) ( )	3,487.	n/a	n/a
30"D left/24"D right corner desk	42"	42"	24-34"	AD C4242 LA ( ) ( )	3,293.	3,570.	3,850.
	48"	48"	24-34"	AD C44 LA ( ) ( )	3,301.	3,611.	3,922.
	60"	60"	24-34"	AD C55 LA ( ) ( )	3,525.	n/a	n/a
24"D left/30"D right corner desk	42"	42"	24-34"	AD C4242 RA ( ) ( )	3,293.	3,570.	3,850.
	48"	48"	24-34"	AD C44 RA ( ) ( )	3,301.	3,611.	3,922.
	60"	60"	24-34"	AD C55 RA ( ) ( )	3,525.	n/a	n/a
30"D both side corner desk	48"	48"	24-34"	AD C44 DA ( ) ( )	3,338.	3,649.	3,959.
	60"	60"	24-34"	AD C55 DA ( ) ( )	3,563.	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>AD C44 SA 117 117 C</b> <b>AD</b> Desk <b>C</b> Shape <b>4</b> Width left <b>4</b> Width right <b>S</b> Depth <b>A</b> Base type <b>117</b> Desktop finish <b>117</b> Base finish <b>C</b> Casters	<i>Specify desk shape:</i> C Corner  <i>Width left, width right:</i> 4 48" 5 60"  <i>Worksurface depth:</i> S 24"D both sides D 30"D both sides L 30"D left, 24"D right R 30"D right, 24"D left  <i>Base type:</i> A Handcrank adjustable with beam  <i>Specify handcrank left or right side of desk:</i> L left R right  <i>Specify desk top and base finish.</i>	<i>Casters/no casters:</i> C Rear casters G Glides  Worksurface edges are trim grey. Clear Maple is not available on 60"W x 60"D corner desks.  Handcrank desks with service beam are mobile, adjustable desks with integral wire management, power distribution capability, and privacy screen inserts.  Handcrank adjustable base adjusts continuously from 24-34"H with collapsible crank under front edge.  Beam provides excess cord storage, continuous power and lay-in cable distribution, privacy screen support, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.  Nominal worksurface depths include 1 3/4" cable/connector space at back edge.  Desks may be specified on fixed front glides and rear casters or 2 1/4" adjustable levelling glides with 1 3/4" travel.  Corner desk beams have four openings for Knoll PDC modules.  Handcrank mechanism is rated at 300 lbs. maximum weight.

Desks with service beam  
handcrank-adjustable  
straight desk

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D straight desk, curved front	36"	24"	24-34"	<b>AD S36 SA ()()</b>	\$1,973.	\$2,122.	\$2,272.
	42"	24"	24-34"	<b>AD S42 SA ()()</b>	2,018.	2,178.	2,340.
	48"	24"	24-34"	<b>AD S48 SA ()()</b>	2,059.	2,234.	2,408.
	60"	24"	24-34"	<b>AD S60 SA ()()</b>	2,146.	2,345.	2,544.
	72"	24"	24-34"	<b>AD S72 SA ()()</b>	2,234.	2,408.	2,681.
	84"	24"	24-34"	<b>AD S84 SA ()()</b>	2,416.	2,664.	2,914.
30"D straight desk, curved front	36"	30"	24-34"	<b>AD S36 DA ()()</b>	2,084.	2,252.	2,421.
	42"	30"	24-34"	<b>AD S42 DA ()()</b>	2,129.	2,308.	2,488.
	48"	30"	24-34"	<b>AD S48 DA ()()</b>	2,172.	2,364.	2,557.
	60"	30"	24-34"	<b>AD S60 DA ()()</b>	2,272.	2,494.	2,720.
	72"	30"	24-34"	<b>AD S72 DA ()()</b>	2,383.	2,644.	2,903.

**Order Code**

Example:	<b>AD S60 SA 117 117 C</b>
<b>AD</b>	Desk
<b>S</b>	Shape
<b>60</b>	Width
<b>S</b>	Depth
<b>A</b>	Base type
<b>117</b>	Desktop finish
<b>117</b>	Base finish
<b>C</b>	Casters

**Specification Information**

*Specify desk shape:*  
S Straight

*For straight desks specify:*

*Width:*  
36 36"  
42 42"  
48 48"  
60 60"  
72 72"  
84 84"

*Worksurface depth:*  
S 24"D  
D 30"D

*Base type:*  
A Handcrank adjustable with beam

*Specify desk top and base finish.*

**Application Notes**

*Casters/no casters:*  
C Rear casters  
G Glides  
Worksurface edges are trim grey.

Handcrank desks with service beam are mobile, adjustable desks with integral wire management, power distribution capability, and privacy screen inserts.

Handcrank adjustable base adjusts continuously from 24-34"H with collapsible crank under front edge. Handcrank may be installed on the left or right side of any straight or symmetrical corner desk.

Beam provides excess cord storage, continuous power and lay-in cable distribution, privacy screen support, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.

Straight desks have slightly curved front edge, to a minimum of 1" extra depth at center. Nominal worksurface depths include 1 3/4" cable/connector space at back edge.

Desks may be specified on fixed front glides and rear casters or 2 1/4" adjustable levelling glides with 1 3/4" travel.

Straight desk beams have two openings for Knoll PDC modules.

Handcrank mechanism is rated at 300 lbs. maximum weight.



# Basic credenzas

## *laminated top*

Currents

description	type	w	d	h	pattern no.	lam./P1/P2	lam./P3
Basic credenza with laminate top two file drawers	casters	24"	24"	28"	<b>AC 24 C 2 C ( ) ( )</b>	\$1,808.	\$1,899.
	casters	30"	24"	28"	<b>AC 30 C 2 C ( ) ( )</b>	1,997.	2,097.
	glides	24"	24"	28"	<b>AC 24 C 2 G ( ) ( )</b>	1,748.	1,837.
	glides	30"	24"	28"	<b>AC 30 C 2 G ( ) ( )</b>	1,938.	2,036.



### Order Code

Example:	<b>AC 30 C2C 117 117 117</b>
<b>AC</b>	Currents credenza
<b>30</b>	Width
<b>C</b>	Basic credenza
<b>2</b>	2 drawer
<b>C</b>	Caster
<b>117</b>	Top finish
<b>117</b>	Case finish
<b>117</b>	Front finish

### Specification Information

*Specify finish for top, case and front.*

### Application Notes

Basic credenzas are freestanding storage assemblies with or without top, 24" or 30" wide.

They may be specified on casters or glides.


All units accept clamp-on workshelf.


Grommeted openings on back and at the bottom allow cable feeds.

# Basic credenzas

*veneer top*

Currents

description	type	w	d	h	pattern no.	P1/P2 front	P3 front	V2 front	V3 front
	casters	24"	24"	28"	<b>AC 24 C 2 C ( ) ( )</b>	\$1,927.	\$2,023.	\$2,222.	n/a
		30"	24"	28"	<b>AC 30 C 2 C ( ) ( )</b>	2,117.	2,222.	2,435.	n/a
	glides	24"	24"	28"	<b>AC 24 C 2 G ( ) ( )</b>	1,867.	1,960.	2,151.	n/a
		30"	24"	28"	<b>AC 30 C 2 G ( ) ( )</b>	2,057.	2,158.	2,376.	n/a

	casters	24"	24"	28"	<b>AC 24 C 2 C ( ) ( )</b>	2,044.	2,147.	n/a	2,564.
		30"	24"	28"	<b>AC 30 C 2 C ( ) ( )</b>	2,234.	2,345.	n/a	2,802.
	glides	24"	24"	28"	<b>AC 24 C 2 G ( ) ( )</b>	1,985.	2,086.	n/a	2,483.
		30"	24"	28"	<b>AC 30 C 2 G ( ) ( )</b>	2,175.	2,284.	n/a	2,719.

## Order Code

Example:	<b>AC 30 C2C 4 117 117</b>
<b>AC</b>	Currents credenza
<b>30</b>	Width
<b>C</b>	Basic credenza
<b>2</b>	2 file drawers
<b>C</b>	Casters
<b>4</b>	Top finish
<b>117</b>	Case finish
<b>117</b>	Fronts finish

## Specification Information

*Specify Credenza top, case and front finish.*

## Application Notes

Basic credenzas are freestanding storage assemblies, 24" or 30" wide.

They may be specified on casters or glides.


All units accept clamp-on workshelf.

Grommeted opening on back and at the bottom allow cable feeds.

# Basic credenzas

## *open top*

Currents

description	type	w	d	h	pattern no.	P1/P2 front	P3 front	V2 front	V3 front
	casters	24"	24"	28"	<b>AC 24 C 2 C N ( ) ( )</b>	\$1,690.	\$1,775.	\$1,985.	\$2,564.
		30"	24"	28"	<b>AC 30 C 2 C N ( ) ( )</b>	1,880.	1,974.	2,199.	2,802.
	glides	24"	24"	28"	<b>AC 24 C 2 G N ( ) ( )</b>	1,630.	1,713.	1,915.	2,483.
		30"	24"	28"	<b>AC 30 C 2 G N ( ) ( )</b>	1,820.	1,911.	2,140.	2,719.

### Order Code

Example:	<b>AC 30 C2C N 117 117</b>
<b>AC</b>	Currents credenza
<b>30</b>	Width
<b>C</b>	Basic credenza
<b>2</b>	2 file drawers
<b>C</b>	Casters
<b>N</b>	Open top
<b>117</b>	Case finish
<b>117</b>	Fronts finish

### Specification Information

*Specify Credenza case and front finish.*

### Application Notes

Basic credenzas are freestanding storage assemblies, 24" or 30" wide.

They may be specified on casters or glides.

All units accept clamp-on workshelf.

Grommeted opening on back and at the bottom allow cable feeds.

# Credenzas

*laminated top*

description	width	depth	height	pattern number	L-P1/P2
Box/data/file/two file combination	36"	24"	28"	AC 3B 32 ( ) ( ) ( ) ( )	\$3,120.
	48"	24"	28"	AC 4B 32 ( ) ( ) ( ) ( )	3,509.




Two files/box/data/file combination	36"	24"	28"	AC 3B 23 ( ) ( ) ( ) ( )	3,120.
	48"	24"	28"	AC 4B 23 ( ) ( ) ( ) ( )	3,509.

All file drawers	36"	24"	28"	AC 3B 22 ( ) ( ) ( ) ( )	2,861.
	48"	24"	28"	AC 4B 22 ( ) ( ) ( ) ( )	3,251.



Enclosed shelves	36"	24"	28"	AC 3B 11 ( ) ( ) ( ) ( )	2,209.
	48"	24"	28"	AC 4B 11 ( ) ( ) ( ) ( )	2,470.



Order Code	Specification Information	Application Notes
Example: <b>AC 3B 23 S 117 117 117 C</b>	<i>Credenza configuration left, right:</i>	<i>Casters/no casters:</i>
<b>AC</b> Credenza	0 Open shelf 18"W	C Casters
<b>3</b> Width	1 Door cabinet 18"W/24"W	G Glides
<b>B</b> Basic	2 2 file pedestal 18"/24"W	
<b>23</b> Configuration	3 personal/data/file 18"W	
<b>S</b> Stanchions	<i>Specify:</i>	
<b>117</b> Credenza top finish	S Stanchions for Reuter overhead storage	
<b>117</b> Credenza case finish	N No stanchions	
<b>117</b> Fronts finish	<i>Specify laminate top, case and front finish.</i>	
<b>C</b> Casters		

Credenzas are freestanding storage assemblies with top and overhead storage capability.

36" and 48" wide credenzas are available with four file drawers, 18" or 24" wide; with enclosed shelves, 18" or 24" wide; or with combination box/data/file and two file drawers, 18" wide box/data/file drawers and 18" wide or 30" wide file drawers. Combination box/data/file and two file drawers may be reversed left/right.

Credenza top slides forward to access 4"D cable feed/storage area inside case at rear. Grommeted openings on back and at the bottom allow power and cable feeds. Cable coil kit fits in cable storage area.

Top may be specified "S" for corner cutouts to accept stanchions for Reuter overhead storage (specified separately). All credenzas support workshelf.




Credenzas also accept service beams which support privacy screens, distribute power and data, and are linkable.

Credenzas may be specified on locking casters or glides with 1 3/4" travel.

# Credenzas

*veneer top*

Currents

description	width	depth	height	pattern number	V2-P1/P2	V3-P1/P2	V2/V2	V3/V3
 Box/data/file/two file combination	36"	24"	28"	<b>AC 3B 32</b> ( ) ( ) ( ) ( )	\$3,257.	\$3,393.	\$3,827.	\$4,250.
	48"	24"	28"	<b>AC 4B 32</b> ( ) ( ) ( ) ( )	3,672.	3,836.	4,296.	4,771.
Two files/box/data/file combination	36"	24"	28"	<b>AC 3B 23</b> ( ) ( ) ( ) ( )	3,257.	3,393.	3,827.	4,250.
	48"	24"	28"	<b>AC 4B 23</b> ( ) ( ) ( ) ( )	3,672.	3,836.	4,296.	4,771.
 All file drawers	36"	24"	28"	<b>AC 3B 22</b> ( ) ( ) ( ) ( )	2,996.	3,132.	3,543.	3,951.
	48"	24"	28"	<b>AC 4B 22</b> ( ) ( ) ( ) ( )	3,413.	3,576.	3,933.	4,472.
 Enclosed shelves	36"	24"	28"	<b>AC 3B 11</b> ( ) ( ) ( ) ( )	2,346.	2,484.	2,788.	3,147.
	48"	24"	28"	<b>AC 4B 11</b> ( ) ( ) ( ) ( )	2,633.	2,795.	3,126.	3,535.

Order Code	Specification Information	Application Notes
Example: <b>AC 3B 23 S 8 117 C C</b>	<i>Credenza configuration left, right:</i>	<p>Credenzas are freestanding storage assemblies with top and overhead storage capability.</p> <p>36" and 48" wide credenzas are available with four file drawers, 18" or 24" wide; with enclosed shelves, 18" or 24" wide; or with combination box/data/file and two file drawers, 18" wide box/data/file drawers and 18" wide or 30" wide file drawers. Combination box/data/file and two file drawers may be reversed left/right.</p> <p>Credenza top slides forward to access 4"D cable feed/storage area inside case at rear. Grommeted openings on back and at the bottom allow power and cable feeds. Cable coil kit fits in cable storage area.</p> <p>Top may be specified "S" for corner cutouts to accept stanchions for Reuter overhead storage (specified separately). All credenzas support workshelf.</p> <p>Credenzas also accept service beams which support privacy screens, distribute power and data, and are linkable.</p> <p>Credenzas may be specified on locking casters or glides with 1 3/4" travel.</p>
<b>AC</b> Credenza	0 Open shelf 18"W	
<b>3</b> Width	1 Door cabinet 18"W/24"W	
<b>B</b> Basic	2 2 file pedestal 18"/24"W	
<b>23</b> Configuration	3 personal/data/file 18"W	
<b>S</b> Stanchions	S Stanchions for Reuter overhead storage	
<b>8</b> Credenza top finish	N No stanchions	
<b>117</b> Credenza case finish	<i>Specify top, case and front finish.</i>	
<b>C</b> Fronts finish	<i>Casters/no casters:</i>	
<b>C</b> Casters	C Casters G Glides	

Desk, credenzas and worktables


# Credenzas with service beam *laminated top*

Currents


description	width	depth	height	pattern number	L-P1/P2
Box/data/file/2 files combination	36"	24"	28"	<b>AC 3A 32</b> ( ) ( ) ( ) ( )	\$3,407.
	48"	24"	28"	<b>AC 4A 32</b> ( ) ( ) ( ) ( )	3,848.
Two files/box/data/file combination	36"	24"	28"	<b>AC 3A 23</b> ( ) ( ) ( ) ( )	3,407.
	48"	24"	28"	<b>AC 4A 23</b> ( ) ( ) ( ) ( )	3,848.



All file drawers	36"	24"	28"	<b>AC 3A 22</b> ( ) ( ) ( ) ( )	3,147.
	48"	24"	28"	<b>AC 4A 22</b> ( ) ( ) ( ) ( )	3,587.



Enclosed shelves	36"	24"	28"	<b>AC 3A 11</b> ( ) ( ) ( ) ( )	2,497.
	48"	24"	28"	<b>AC 4A 11</b> ( ) ( ) ( ) ( )	2,809.



Order Code	Specification Information	Application Notes
Example: <b>AC 3A 32N 117 117 117</b>	<i>Credenza configuration left, right:</i>	<p>Credenzas with service beam are freestanding storage assemblies with top, integral wire management, privacy screen inserts and overhead storage capability.</p> <p>36" and 48" wide credenzas are available with four file drawers, 18" or 24" wide; with enclosed shelves, 18" or 24" wide; or with combination box/data/file and two file drawers, 18" wide box/data/file drawers and 18" wide or 30" wide file drawers. Combination box/data/file and two file drawers may be reversed left/right.</p> <p>Credenza top slides forward to access 4"D cable feed/storage area inside case at rear. Grommeted openings on back and at the bottom allow power and cable feeds. Cable coil kit fits in cable storage area.</p> <p>Credenza wireway beam may be linked to adjacent desk or credenza beams for continuous lay-in cable.</p> <p>All credenzas accept clamp-on workshelf.</p> <p>Top may be specified "S" for corner cutouts to accept stanchions for Reuter overhead storage (specified separately). All credenzas support workshelf.</p> <p>Credenzas may be specified on locking casters or glides with 1 3/4" travel.</p>
<b>G</b>	<i>Casters/no casters:</i>	
<b>AC</b>	0 Open shelf 18"W	
<b>3</b>	1 Door cabinet 18"W/24"W	
<b>A</b>	2 2 file pedestal 18"/24"W	
<b>3</b>	3 personal/data/file 18"W	
<b>A</b>	S Stanchions for Reuter overhead storage	
<b>3</b>	N No stanchions	
<b>2</b>	<i>Specify top, case and front finish.</i>	
<b>N</b>		
<b>117</b>		
<b>117</b>		
<b>117</b>		
<b>G</b>		

# Credenzas with service beam


## veneer top

Currents


description	type	width	depth	height	pattern number	V2-P1/P2	V3-P1/P2	V2/V2	V3/V3
Box/data/file/2 files combination		36"	24"	28"	<b>AC 3A 32</b> ( ) ( ) ( ) ( )	\$3,543.	\$3,679.	\$4,114.	\$4,538.
		48"	24"	28"	<b>AC 4A 32</b> ( ) ( ) ( ) ( )	4,011.	4,172.	4,635.	5,109.
Two files/box/data/file combination		36"	24"	28"	<b>AC 3A 23</b> ( ) ( ) ( ) ( )	3,543.	3,679.	4,114.	4,538.
		48"	24"	28"	<b>AC 4A 23</b> ( ) ( ) ( ) ( )	4,011.	4,172.	4,635.	5,109.



All file drawers		36"	24"	28"	<b>AC 3A 22</b> ( ) ( ) ( ) ( )	3,282.	3,419.	3,827.	4,239.
		48"	24"	28"	<b>AC 4A 22</b> ( ) ( ) ( ) ( )	3,751.	3,913.	4,271.	4,809.



Enclosed shelves		36"	24"	28"	<b>AC 3A 11</b> ( ) ( ) ( ) ( )	2,633.	2,768.	3,074.	3,431.
		48"	24"	28"	<b>AC 4A 11</b> ( ) ( ) ( ) ( )	2,971.	3,132.	3,466.	3,873.



Order Code	Specification Information	Application Notes
Example: <b>AC 3A 32N 8 117 C G</b>	<i>Credenza configuration left, right:</i>	<p>Credenzas with service beam are freestanding storage assemblies with top, integral wire management, privacy screen inserts and overhead storage capability.</p> <p>36" and 48" wide credenzas are available with four file drawers, 18" or 24" wide; with enclosed shelves, 18" or 24" wide; or with combination box/data/file and two file drawers, 18" wide box/data/file drawers and 18" wide or 30" wide file drawers. Combination box/data/file and two file drawers may be reversed left/right.</p> <p>Credenza top slides forward to access 4"D cable feed/storage area inside case at rear. Grommeted openings on back and at the bottom allow power and cable feeds. Cable coil kit fits in cable storage area.</p> <p>Credenza wireway beam may be linked to adjacent desk or credenza beams for continuous lay-in cable.</p> <p>All credenzas accept clamp-on workshelf.</p> <p>Top may be specified "S" for corner cutouts to accept stanchions for Reuter overhead storage (specified separately). All credenzas support workshelf.</p> <p>Credenzas may be specified on locking casters or glides with 1 3/4" travel.</p>
<b>AC</b> Credenza	0 Open shelf 18"W	
<b>3</b> Width	1 Door cabinet 18"W/24"W	
<b>A</b> Service beam	2 2 file pedestal 18"/24"W	
<b>3</b> Configuration left	3 personal/data/file 18"W	
<b>2</b> Configuration right	S Stanchions for Reuter overhead storage	
<b>N</b> No stanchions	N No stanchions	
<b>8</b> Credenza top finish	<i>Specify top, case and front finish.</i>	
<b>117</b> Credenza case finish		
<b>C</b> Fronts finish		
<b>G</b> Glides		

Desk, credenzas and worktables

description	w	d	h	pattern no.	paint
Service beam, straight desk	36"	–	9"	AA1RW36( )	\$341.
	42"	–	9"	AA1RW42( )	365.
	48"	–	9"	AA1RW48( )	391.
	60"	–	9"	AA1RW60( )	439.
	72"	–	9"	AA1RW72( )	487.
	84"	–	9"	AA1RW84( )	545.
Service beam set for corner desk	36"	60"	9"	AA1RWC35( )	803.
	36"	72"	9"	AA1RWC36( )	853.
	42"	42"	9"	AA1RWC4242( )	755.
	48"	48"	9"	AA1RWC44( )	803.
	48"	60"	9"	AA1RWC45( )	853.
	48"	72"	9"	AA1RWC46( )	901.
	48"	84"	9"	AA1RWC47( )	960.
	60"	36"	9"	AA1RWC53( )	803.
	60"	48"	9"	AA1RWC54( )	853.
	60"	60"	9"	AA1RWC55( )	901.
	72"	36"	9"	AA1RWC63( )	853.
	72"	48"	9"	AA1RWC64( )	901.
	84"	48"	9"	AA1RWC74( )	960.
Service beam, one side of corner desk (left)	36"	–	9"	AA1RWL36( )	365.
	42"	–	9"	AA1RWL42( )	391.
	48"	–	9"	AA1RWL48( )	414.
	60"	–	9"	AA1RWL60( )	462.
	72"	–	9"	AA1RWL72( )	512.
	84"	–	9"	AA1RWL84( )	561.
Service beam, one side of corner desk (right)	36"	–	9"	AA1RWR36( )	365.
	42"	–	9"	AA1RWR42( )	391.
	48"	–	9"	AA1RWR48( )	414.
	60"	–	9"	AA1RWR60( )	462.
	72"	–	9"	AA1RWR72( )	512.
	84"	–	9"	AA1RWR84( )	561.

Order Code	Specification Information	Application Notes
Example: <b>AA1 RW48 117</b>	For corner service beam sets "w" column indicates width of left side, "d" column indicates width of right side of desk.  <i>Specify paint finish for service beams.</i>	Service beams fit on to desks or credenzas to provide lay-in wire management, power and data network distribution, and modesty to 14" above floor. Service beams do not attach to fixed height C-legs.  Straight service beams are applicable on corresponding width straight C-leg desks.  Service beam corner sets include corner connector for continuous wireway under corner desks.  Service beams for one side of corner desk may be specified when other side is planned along service wall.
<b>AA1</b> Desk accessory		
<b>R</b> Replacement		
<b>W</b> Wireway		
<b>48</b> Width		
<b>117</b> Finish		
	Retracting doors in end caps and corners allow lay-in cabling and power jumpers from desk-to-desk. Each beam has two openings for Knoll PDC modules; corner desk sets have four openings.  Ballast plate is required when adding service beam to 60" x 24" or 72" x 24" handcrank desk. Ballast plate attaches under worksurface.	



description	w	d	h	pattern no.	paint
Replacement service beam corner	4"	4"	9"	<b>AA1RWC( )</b>	\$121.
Credenza service beam	36"	3"	9"	<b>AA1RW3C( )</b>	268.
	48"	3"	9"	<b>AA1RW4C( )</b>	316.
Ballast plate for handcrank desks				<b>AA1BP6</b>	43.

**Order Code**

Example: <b>AA1 RW48 117</b>
<b>AA1</b> Desk accessory
<b>R</b> Replacement
<b>W</b> Wireway
<b>48</b> Width
<b>117</b> Finish

**Specification Information**

For corner service beam sets “w” column indicates width of left side, “d” column indicates width of right side of desk.

*Specify paint finish for service beams.*

**Application Notes**

Service beams fit on to desks or credenzas to provide lay-in wire management, power and data network distribution, and modesty to 14" above floor. Service beams do not attach to fixed height C-legs.

Straight service beams are applicable on corresponding width straight C-leg desks.

Service beam corner sets include corner connector for continuous wireway under corner desks.

Service beams for one side of corner desk may be specified when other side is planned along service wall.

Retracting doors in end caps and corners allow lay-in cabling and power jumpers from desk-to-desk. Each beam has two openings for Knoll PDC modules; corner desk sets have four openings.

Ballast plate is required when adding service beam to 60" x 24" or 72" x 24" handcrank desk. Ballast plate attaches under worksurface.

# Power, data and communications components for desks and credenzas

Currents

## 2 + 2 Raceway

### outlet module, linking bracket, jumper cable

description	type	w	pattern no.	paint
Outlet module for desk service beam	2 outlets	12"	<b>AR1 DEM2 ( )</b>	\$237.
	4 outlets	24"	<b>AR1 DEM4 ( )</b>	317.
Desk-to-desk/credenza linking bracket			<b>AA1DD( )</b>	46.
Desk to wall linking bracket			<b>AA1DW( )</b>	159.
Jumper cable	12" wall/36" desk	37"	<b>AR1 EJ1</b>	80.
	24" wall/48" desk	49"	<b>AR1 EJ2</b>	105.
	36" wall/60" desk	61"	<b>AR1 EJ3</b>	119.
	48" wall/84" desk	73"	<b>AR1 EJ4</b>	131.
	60" wall/84" desk	85"	<b>AR1 EJ5</b>	146.
	72" wall/96" desk	97"	<b>AR1 EJ6</b>	159.
	108" desk	109"	<b>AR1 EJ7</b>	172.
	96" wall/120" desk	121"	<b>AR1 EJ8</b>	184.
	120" wall/144" desk	145"	<b>AR1 EJ10</b>	211.

#### Order Code

Example:	<b>AR1 EJ5</b>
<b>AR1</b>	Raceway
<b>E</b>	2+2, eight wire
<b>J</b>	Jumpers
<b>5</b>	Width

#### Specification Information

Raceway components distribute four 20-amp circuits in desk and credenza service beams: two convenience circuits and two protected circuits with heavy grounds and heavy-duty #10 neutrals.

*For outlet module specify paint finish.*

#### Application Notes

Knoll 2+2, four circuit power components mount in desk beams and in credenza stanchions. Powered desks and credenzas must be specified with glides (not casters) and linking brackets.

Desk outlet module mounts in center of beam, in lower tray. Module accepts two or four duplex outlets plus two jumper cables at each end. Duplex outlets snap into outlet modules. Four outlet module fits nominal beam lengths of 60" or larger.

Desk-to-desk linking bracket links any beam ends or corners, universal for all joint conditions. Desk-to-wall linking bracket connects between wall attachment zone and beam end or corner.

Jumper cables connect power from outlet module to outlet module. Specify actual length between outlet modules.

# Power, data and communications components for desks and credenzas

## 2 + 2 Raceway outlets, infeeds, cord tray

description	type	w	d	h	pattern no.	black	orange (-0) or orange triangle (-T)	black/orange	paint
Duplex outlet	Circuit A				<b>AR1 DA</b>	\$33.			
	Circuit B				<b>AR1 DB</b>	33.			
	Circuit X				<b>AR1 DX</b>	33.	38.		
	Circuit Y				<b>AR1 DY</b>	33.	38.		
Power infeeds	Hardwire infeed				<b>AR1 DEHI( )</b>				265.
	Modular infeed				<b>AR1 DEPI</b>				199.
Credenza stanchion outlet (includes outlets)					<b>AR1 OHS ( )</b>	199.		212.	
Auxiliary cord tray		20"	2"	6"	<b>AR1 CB</b>				105.

Order Code	Specification Information	Application Notes
Example: <b>AR1 DEPI</b>	Raceway components distribute four 20-amp circuits in desk and credenza service beams: two convenience circuits and two protected circuits with heavy grounds and heavy-duty #10 neutrals.	Modular infeed is 7' liquidtight flexible conduit with pigtails on one end and modular jumper plug on other end. Hardwire infeed is field-wirable junction box which fastens to beam and has modular jumper and plug.
<b>AR1</b> Raceway		
<b>DEPI</b> Infeed type		
	<p><i>For outlet module specify paint finish.</i></p> <p><i>For stanchion outlet specify:</i></p> <p>N All black outlet faces</p> <p>NO Black A/B and orange X/Y</p>	<p>Credenza stanchion outlet includes two duplex outlets, with one outlet accessing each of circuits A, B, X, and Y. Outlet housings have flexible conduit leadout, terminated by a dual modular connector which accepts jumpers.</p> <p>Auxiliary cord tray attaches beneath stiffener under desk or panel-mounted worksurface to accommodate transformers or a bundle of cables. U.L. does not permit outlet strip in auxiliary cord tray.</p>

# Power, data and communications components for desks and credenzas

## 3 + 3 Raceway outlet, linking bracket, jumper cable

description	type	w	d	h	pattern no.	no finish/paint
Outlet module for desk service beam	36", 42", 48" beam	12"			<b>AR1 DTM2 ( )</b>	\$278.
	60", 72", 84" beam	24"			<b>AR1 DTM4 ( )</b>	364.
Desk to wall linking bracket					<b>AA1DW( )</b>	159.
Jumper cable	12" wall/36" desk	37"			<b>AR1 TJ1</b>	92.
	24" wall/48" desk	49"			<b>AR1 TJ2</b>	119.
	36" wall/60" desk	61"			<b>AR1 TJ3</b>	146.
	48" wall/72" desk	73"			<b>AR1 TJ4</b>	159.
	60" wall/84" desk	85"			<b>AR1 TJ5</b>	172.
	72" wall/96" desk	97"			<b>AR1 TJ6</b>	184.
	108" desk	109"			<b>AR1 TJ7</b>	211.
	96" wall/120" desk	121"			<b>AR1 TJ8</b>	211.
	120" wall/144" desk	145"			<b>AR1 TJ10</b>	237.
	Desk-to-desk/credenza linking bracket					<b>AA1DD( )</b>

Order Code	Specification Information	Application Notes
Example: <b>AR1 DTM4 117</b>	Raceway components distribute four 20-amp circuits in desk and credenza service beams: three convenience circuits and three protected circuits with heavy grounds and heavy-duty #10 neutrals.	Knoll 3+3, six circuit power components mount in desk beams and in credenza stanchions. Powered desks and credenzas must be specified with glides (not casters) and linking brackets.
<b>AR1</b> Raceway		
<b>DT</b> 3+3, desk	<i>For outlet module specify paint finish.</i>	Desk outlet module mounts in center of beam, in lower tray. Module accepts two or four duplex outlets plus two jumper cables at each end. Duplex outlets snap into outlet module. Four outlet module fits nominal beam lengths of 60" or larger.
<b>M</b> Outlet module		
<b>4</b> Four outlets		
<b>117</b> Finish		
	<i>For stanchion outlet specify:</i>	Jumper cables connect power from outlet module to outlet module. Specify actual length between outlet modules.
	N Black outlet faces NO Black A/B and orange X/Y	

# Power, data and communications components for desks and credenzas

## 3 + 3 Raceway outlets, infeeds, cord tray

description	type	w	d	h	pattern no.	black	orange (-0) or orange triangle (-T)	black/ orange	no finish/ paint
Duplex outlet	Circuit A				<b>AR1 DA</b>	\$33.			
	Circuit B				<b>AR1 DB</b>	33.			
	Circuit C				<b>AR1 DC</b>	33.			
	Circuit X				<b>AR1 DX</b>	33.	38.		
	Circuit Y				<b>AR1 DY</b>	33.	38.		
	Circuit Z				<b>AR1 DZ</b>	33.	38.		
Power infeeds	Hardwire base infeed				<b>AR1 DTH( )</b>				304.
	Modular infeed				<b>AR1 DTPI</b>				225.
Credenza stanchion outlet (includes outlets)					<b>AR1 OHS ( )</b>	199.		212.	
Auxiliary cord tray		20"	2"	6"	<b>AR1 CB</b>				105.

### Order Code

Example:	<b>AR1 DTPI</b>
<b>AR1</b>	Raceway
<b>DTPI</b>	Infeed type

### Specification Information

Raceway components distribute four 20-amp circuits in desk and credenza service beams: three convenience circuits and three protected circuits with heavy grounds and heavy-duty #10 neutrals.

*For outlet module specify paint finish.*

*For stanchion outlet specify:*


- N Black outlet faces
- NO Black A/B and orange X/Y

### Application Notes

Modular infeed is 7' liquidtight flexible conduit with pigtails on one end and modular jumper plug on other end. Hardwire infeed is field-wirable junction box which fastens to beam and has modular jumper end.

Credenza stanchion outlet includes two duplex outlets, with one outlet accessing each of circuits A, B, X, and Y. Outlet housings have flexible conduit leadout, terminated by a dual modular connector which accepts jumpers. Auxiliary cord tray attaches beneath stiffener under desk or panel-mounted worksurface to accommodate transformers or a bundle of cables. U.L. does not permit outlet strip in auxiliary cord tray.


# Above-desk storage and lighting for desks and credenzas *workshelf and T5 task light*

description	type	w	d	h	pattern no.	paint	Standard	Advanced
		21"	13"	6"	<b>AA1WS24( )</b>	\$439.		
		27"	13"	6"	<b>AA1WS30( )</b>	462.		
		33"	13"	6"	<b>AA1WS36( )</b>	487.		
		45"	13"	6"	<b>AA1WS48( )</b>	523.		
Workshelf dividers (set of 5)					<b>AA1WSD( )</b>	121.		
Task Light	Used with 24" and wider workshelf	19"	4"	1 1/2"	<b>AA2T5E19( )</b>		146.	n/a
	Used with 30" and wider workshelf	25"	4"	1 1/2"	<b>AA2T5E25( )</b>		184.	360.
	Used with 48" and wider workshelf	37"	4"	1 1/2"	<b>AA2T5E37( )</b>		206.	394.

Order Code	Specification Information	Application Notes								
<p>Example: <b>AA1 WS24 117</b></p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border-bottom: 1px solid black;"><b>AA1</b></td> <td style="border-bottom: 1px solid black;">Accessory</td> </tr> <tr> <td style="border-bottom: 1px solid black;"><b>WS</b></td> <td style="border-bottom: 1px solid black;">Workshelf</td> </tr> <tr> <td style="border-bottom: 1px solid black;"><b>24</b></td> <td style="border-bottom: 1px solid black;">Width</td> </tr> <tr> <td style="border-bottom: 1px solid black;"><b>117</b></td> <td style="border-bottom: 1px solid black;">Finish</td> </tr> </table>	<b>AA1</b>	Accessory	<b>WS</b>	Workshelf	<b>24</b>	Width	<b>117</b>	Finish	<p><i>Specify painted finishes for workshelf and dividers.</i></p> <p><i>Specify:</i></p> <p>Width - Task Lights mount in cabinets and shelves at least 6" wider than light width.</p> <p>Type:</p> <p>S Standard A Advanced</p> <p>Specify suffix -CH and add \$45 list for City of Chicago installations. Example: AA2T5E19S-CH</p> <p>All housings are black.</p>	<p>Workshelf mounts anywhere along back of desk or credenza, independent of privacy screens. Workshelf includes uprights and clamps for Currents, Equity, or Morrison 1 1/4" worksurfaces.</p> <p>Task lights mount into the recess in the underside of overhead cabinets and shelves at least 6" wider than task light width.</p> <p>Task lights include T5 cool white (4100K) fluorescent lamp, electronic ballast, 9' grounded corset, prismatic lens, rocker switch, one cord exit management clip and mounting hardware.</p> <p>Task light cordset is center exit. On smaller units cord exit is off-center, but still not handed.</p> <p>Task lights are TCLP compliant and meet requirements of California Title 24.</p> <p>Advanced task lights are fitted with ballast and lamp compliant with LEED requirements.</p>
<b>AA1</b>	Accessory									
<b>WS</b>	Workshelf									
<b>24</b>	Width									
<b>117</b>	Finish									

# Privacy screens for desks and credenzas *perforated steel*

Currents


description	w	d	h	pattern no.	perforated
	36"	1"	9"	<b>AZ1 0936H ( )</b>	\$292.
	42"	1"	9"	<b>AZ1 0942H ( )</b>	306.
	48"	1"	9"	<b>AZ1 0948H ( )</b>	316.
	60"	1"	9"	<b>AZ1 0960H ( )</b>	341.
	72"	1"	9"	<b>AZ1 0972H ( )</b>	365.


Order Code	Specification Information	Application Notes
Example: <b>AZ1 0936 H 117</b>	<i>Privacy screen surface types:</i>	Privacy screens plug into corresponding width service beam at back edge of desks and credenzas.
<b>AZ1</b> Privacy screen	H Perforated (9" only)	
<b>09</b> Height	Specify painted finish for perforated screens and screen brackets.	Screens to 30"H are painted finish, perforated steel, to conceal cable clutter from desktop equipment to service beam. Higher screens are tackable/acoustical upholstered surface on both sides.
<b>36</b> Width		Screens include brackets to mount to desk or credenza with service beams of corresponding width. Two 36"W screens may be specified for 72"W desks.
<b>H</b> Surface		One 48"W screen can also be planned at either end of 72" straight or corner beam.
<b>117</b> Bracket finish		Screens may be shared between desks in back-to-back configurations.

Desk, credenzas and worktables

# Privacy screens for desks and credenzas upholstered

Currents

description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
	36"	1 3/8"	18"	<b>AZ1 1836F ( )()</b>	\$423.	\$439.	\$452.	\$481.	\$497.	\$512.	\$525.	\$555.	\$590.
	42"	1 3/8"	18"	<b>AZ1 1842F ( )()</b>	446.	462.	479.	514.	529.	549.	564.	595.	630.
	48"	1 3/8"	18"	<b>AZ1 1848F ( )()</b>	468.	487.	506.	546.	564.	583.	604.	633.	669.
	60"	1 3/8"	18"	<b>AZ1 1860F ( )()</b>	560.	583.	608.	658.	682.	707.	730.	770.	819.
	72"	1 3/8"	18"	<b>AZ1 1872F ( )()</b>	n/a	662.	n/a	n/a	n/a	n/a	n/a	n/a	n/a

description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
	36"	1 3/8"	27"	<b>AZ1 2736F ( )()</b>	528.	549.	566.	603.	621.	639.	658.	699.	737.
	42"	1 3/8"	27"	<b>AZ1 2742F ( )()</b>	560.	578.	606.	642.	663.	685.	707.	746.	778.
	48"	1 3/8"	27"	<b>AZ1 2748F ( )()</b>	583.	608.	633.	682.	707.	730.	754.	793.	822.
	60"	1 3/8"	27"	<b>AZ1 2760F ( )()</b>	699.	730.	762.	822.	853.	882.	913.	962.	1,023.
	72"	1 3/8"	27"	<b>AZ1 2772F ( )()</b>	n/a	827.	n/a	n/a	n/a	n/a	n/a	n/a	n/a




Order Code	Specification Information	Application Notes
Example: <b>AZ1 1848 F15 117</b>	<i>Privacy screen surface types:</i>	Edges of privacy screens are trim grey.
<b>AZ1</b> Privacy screen	H Perforated (9" only)	
<b>18</b> Height	<i>Specify finish:</i>	Privacy screens plug into corresponding width service beam at back edge of desks and credenzas.
<b>48</b> Width	F Tackable fabric (18" or 27"H)	
<b>F</b> Surface	<i>Specify fabric group:</i>	Screens to 30"H are painted finish, perforated steel, to conceal cable clutter from desktop equipment to service beam. Higher screens are tackable/acoustical upholstered surface on both sides.
<b>15</b> Fabric group	10 Fabric group 10	
<b>117</b> Bracket finish	15 Fabric group 15	
	20 Fabric group 20	
	30 Fabric group 30	
	35 Fabric group 35	
	40 Fabric group 40	
	45 Fabric group 45	
	50 Fabric group 50	Screens include brackets to mount to desk or credenza with service beams of corresponding width. Two 36"W screens may be specified for 72"W desks.
	55 Fabric group 55	
		One 48"W screen can also be planned at either end of 72" straight or corner beam.
		Screens may be shared between desks in back-to-back configurations.



# Privacy screens for desks and credenzas

## *windows and connectors*

Currents

description	width	depth	height	pattern number	list price
 Windows	36"	1"	9"	<b>AZ1 U0936T ( )</b>	\$292.
	42"	1"	9"	<b>AZ1 U0942T ( )</b>	322.
	48"	1"	9"	<b>AZ1 U0948T ( )</b>	353.
	60"	1"	9"	<b>AZ1 U0960T ( )</b>	426.
 Straight privacy screen connectors	–	–	–	<b>AZ1 CS</b>	26.
 Corner privacy screen connectors	1"	–	18"	<b>AZ1 CL18 ( )</b>	49.
	1"	–	27"	<b>AZ1 CL27 ( )</b>	61.
	1"	–	36"	<b>AZ1 CL36 ( )</b>	74.

Order Code	
Example: <b>AZ1 U0948T 117</b>	
<b>AZ1</b>	Privacy screen
<b>U</b>	Window
<b>09</b>	Height
<b>48</b>	Width
<b>T</b>	Surface finish
<b>117</b>	Frame finish

**Specification Information**  
*Specify painted finish for window frame and corner connectors.*

Windows are translucent acrylic.  
 Ends of windows are trim grey.

**Application Notes**

Windows attach to top of any same-width upholstered privacy screen to add enclosure to a desk or credenza.

Windows on 18"H screens align with 27"H screens, 48" above floor. Windows on 27"H screens add-up to 57" above floor.

Screen connectors align adjacent screens (or screens with windows) in clusters of desks and credenzas. Corner connectors include vertical trim to fill corner.

Specify two corner connectors for a three-way T-connection.

Specify three corner connectors for a four-way X-connection

Desk, credenzas and worktables

# Desk and credenza accessories

## *stanchions, file supports and data tray cover*

Currents




description	type	w	d	h	pattern no.	black	paint
Credenza stanchions	outlets cover for stanchions to 39"				<b>AA1RSOC11( )</b>		\$61.
	outlets cover for stanchions to 48"				<b>AA1RSOC20( )</b>		61.
	stanchions to 39"H	4"	9"	11"	<b>AA1RS11( )</b>		536.
	stanchions to 48"H	4"	9"	20"	<b>AA1RS20( )</b>		608.
Data tray cover set, desk or credenza		36"			<b>AA1DT36( )</b>		80.
		42"			<b>AA1DT42( )</b>		85.
		48"			<b>AA1DT48( )</b>		91.
		60"			<b>AA1DT60( )</b>		96.
		72"			<b>AA1DT72( )</b>		103.
		84"			<b>AA1DT84( )</b>		112.
File supports		18"	-	-	<b>AC1 FS18</b>	38.	
		24"	-	-	<b>AC1 FS24</b>	38.	
		30"	-	-	<b>AC1 FS30</b>	38.	
Outlet fillers (Set of 10)				<b>AR OF</b>	29.		

Order Code	Specification Information	Application Notes
Example: <b>AA1 DT36 117</b>	<i>Specify painted finish for data tray cover set, desk, or credenza.</i>	Credenza stanchions mount Reuter shelf or overhead to credenza of the same width. Specify credenza with stanchion cutouts, and storage. Stanchion cutouts allow credenza top to be pulled forward for access to cable storage in beam.
<b>AA1</b> Accessory		
<b>DT</b> Data tray cover set		
<b>36</b> Width		
<b>117</b> Finish		
	Top of Reuter overhead on stanchions to 48"H is at 63". Top of overhead on stanchions to 39"H is at 54".	Metal data tray covers set into top of service beam to protect data network cables.
	Outlets cover for stanchions has openings for two duplex power outlets and two PDC modules. Specify outlets filler for unused openings.	Data tray cover sets fit straight desk beam or one side of corresponding width corner desk.
		Basic credenzas are compact, freestanding storage assemblies components with top and overhead storage capability. Basic credenzas include two full width file drawers.

# Worktables

*personal, tripod, wiper*

Currents

description	type	w	d	h	pattern no.	lam.	V2	V3
 Personal worktable	Adjustable	36"	28"	24-30"	<b>AT1 P36A</b> ( )( )	\$1,217.	\$1,425.	\$1,630.
	Fixed height	36"	28"	28"	<b>AT1 P36F</b> ( )( )	1,035.	1,242.	1,450.
 Tripod worktable	Adjustable	36"	36"	24-30"	<b>AT1 TA</b> ( )( )	1,491.	1,698.	1,904.
	Fixed height (low)	36"	36"	26"	<b>AT1 TL</b> ( )( )	1,035.	1,242.	1,450.
 Small wiper	Adjustable	47"	30"	24-30"	<b>AT1 W24A</b> ( )( )	1,644.	1,851.	2,058.
	Fixed height	47"	30"	28"	<b>AT1 W24F</b> ( )( )	1,035.	1,242.	1,450.

Order Code	Specification Information	Application Notes
Example: <b>AT1 W24F 117 117 C</b>	F Fixed height	Worktables are independent, mobile tables designed for use with desks, credenzas and panel-mounted worksurfaces.
<b>AT1</b> Table	A Adjustable height	
<b>W</b> Shape	<i>Specify top and base finish.</i>	Personal worktable is rounded rectangle shape, sized to fit within small workstations. Personal worktable has center column, four-star base for clear knee space support.
<b>24</b> Depth		
<b>F</b> Base type		Tripod is rounded triangle shape designed to roll under Currents 48" corner desks set at 28"H.
<b>117</b> Desktop finish		
<b>117</b> Base finish		Small wiper and half wiper are conference extensions for 24"D worksurfaces. Medium wiper corresponds to 30"D worksurfaces.
<b>C</b> Casters		

*Specify:*

- C Casters
- G Glides

Fixed height tables are 28"H except Tripod, 26"H. Adjustable height worktables adjust 24"-30"H in one-inch increments. Glides adjust 1 3/4". All casters are lockable. Worktable top edge is trim grey.

Wiper and half wiper tables have four legs with integral wire-manager channels.

Desk, credenzas and worktables

# Worktables

*personal, tripod, wiper*

description	type	w	d	h	pattern no.	lam.	V2	V3
Medium wiper	Adjustable	54"	30"	24-30"	<b>AT1 W30A ( ) ( )</b>	\$1,703.	\$1,924.	\$2,143.
	Fixed height	54"	30"	28"	<b>AT1 W30F ( ) ( )</b>	1,095.	1,315.	1,534.



Half wiper end table	Left, adjustable	33"	36"	24-30"	<b>AT1 E24LA ( ) ( )</b>	1,644.	1,851.	2,058.
	Left, fixed height	33"	36"	28"	<b>AT1 E24LF ( ) ( )</b>	1,035.	1,242.	1,450.
	Right, adjustable	33"	36"	24-30"	<b>AT1 E24RA ( ) ( )</b>	1,644.	1,851.	2,058.
	Right, fixed height	33"	36"	28"	<b>AT1 E24RF ( ) ( )</b>	1,035.	1,242.	1,450.



*right*

Order Code	Specification Information	Application Notes
Example: <b>AT1 W24F 117 117 C</b>	F Fixed height	Worktables are independent, mobile tables designed for use with desks, credenzas and panel-mounted worksurfaces.
<b>AT1</b> Table	A Adjustable height	
<b>W</b> Shape	<i>Specify top and base finish.</i>	Personal worktable is rounded rectangle shape, sized to fit within small workstations. Personal worktable has center column, four-star base for clear knee space support.
<b>24</b> Depth		
<b>F</b> Base type		Tripod is rounded triangle shape designed to roll under Currents 48" corner desks set at 28"H.
<b>117</b> Desktop finish		
<b>117</b> Base finish		Small wiper and half wiper are conference extensions for 24"D worksurfaces. Medium wiper corresponds to 30"D worksurfaces.
<b>C</b> Casters		

*Specify:*





- C Casters
- G Glides

Fixed height tables are 28"H except Tripod, 26"H. Adjustable height worktables adjust 24"-30"H in one-inch increments. Glides adjust 1 3/4". All casters are lockable. Worktable top edge is trim grey.





Wiper and half wiper tables have four legs with integral wire-manager channels.

# Worktables

*half-round, large wiper, round*

description	type	w	d	h	pattern no.	lam.	V2	V3
Half round worktable 	Adjustable	50"	28"	24-30"	<b>AT1 D50A</b> ( ) ( )	\$1,401.	\$1,644.	\$1,887.
	Fixed height	50"	28"	28"	<b>AT1 D50F</b> ( ) ( )	1,217.	1,461.	1,703.
Large half round worktable 	Adjustable	62"	30"	24-30"	<b>AT1 D62A</b> ( ) ( )	1,826.	2,070.	2,313.
	Fixed height	62"	30"	28"	<b>AT1 D62F</b> ( ) ( )	1,217.	1,461.	1,703.
Large wiper end table 	Adjustable	72"	32"	24-30"	<b>AT1 W50A</b> ( ) ( )	1,826.	2,070.	2,313.
	Fixed height	72"	32"	28"	<b>AT1 W50F</b> ( ) ( )	1,217.	1,461.	1,703.
Round worktable 	Adjustable	42"		24-30"	<b>AT1 R42A</b> ( ) ( )	1,703.	1,924.	2,143.
	Adjustable	48"		24-30"	<b>AT1 R48A</b> ( ) ( )	1,767.	1,996.	2,229.
	Fixed height	42"		28"	<b>AT1 R42F</b> ( ) ( )	1,095.	1,315.	1,534.
	Fixed height	48"		28"	<b>AT1 R48F</b> ( ) ( )	1,157.	1,386.	1,619.

Order Code	Specification Information	Application Notes
Example: <b>AT1 D50F 117 117 C</b>	F Fixed height	<i>Specify:</i> C Casters G Glides
<b>AT1</b> Table	A Adjustable height	
<b>D</b> Shape	<i>Specify top and base finish.</i>	Worktables are independent, mobile tables designed for use with desks, credenzas and panel-mounted worksurfaces.  Half round worktable aligns with back-to-back 24"D Currents desks or worksurfaces plus a Currents screen or Knoll systems panel between. Large half round table aligns with back-to-back 30"D desks or worksurfaces. Large wiper is shared conference extension for back-to-back 24"D desks. All tables have center edge offset to clear panel end trim.  Large half-round, round, and wiper tables have four legs with integral wire-manager channels. Half round worktable has center column, three-star base for clear knee space support.
<b>50</b> Depth		
<b>F</b> Base type		
<b>117</b> Desktop finish		
<b>117</b> Base finish		
<b>C</b> Casters		

description	type	w	d	h	pattern no.	black	no finish	paint
Power monument		28"	5"	36"	<b>AA1PM( )</b>			\$1,461.
								
Cable container (one side)		24"	2"	16"	<b>AA1PMCC( )</b>			243.
								
Power module, 2+2	2+2				<b>AR1 EPM</b>			138.
	3+3				<b>AR1 TPM</b>			159.
Outlet fillers (Set of 10)					<b>AR OF</b>			29.
Hinged outlet flap (each)					<b>APC OCF</b>			24.
Ceiling infeed top					<b>AA1PMCIA( )</b>			121.
								

**Order Code**

Example: <b>AA1 PM 117</b>	
<b>AA1</b> Accessory	
<b>PM</b> Power monument	
<b>117</b> Finish	

**Specification Information**

Specify painted finish for power monument, cable containers or ceiling infeed top.

**Application Notes**

Power monument is floorstanding monument providing power and data/telecommunications outlets above worksurface height (36").

Power monument may be planned at the center of a group of worktables or C-leg desks in an active meeting area.

Power monument cable containers attach to each face of power monument for excess cable bundling below worksurface height (21"). Each face of power monument accepts one cable container.

Power monument provides four pairs of outlet openings on each side which may be duplex outlets, PDC modules or black fillers.

Power modules support one pair of duplex outlets each side. Specify up to four modules (eight duplexes each side).

For 2+2 power specify duplexes, **AR1 EPC1** power connectors between modules and **AR1 EPI5** infeed for floor feed, or **AR1 EPIC** for ceiling infeed ( see page 46 ). For 3+3 power specify duplexes, **AR1 TPC1** connectors, **AR1 TPI5** or **AR1 TPIC**.

Hinged outlet flap covers two outlet openings; four flaps on each side of power monument cover all openings.

Ceiling infeed top replaces standard top for use with Currents ceiling infeed and infeed panel.


Upstart Tables  
*primary worksurfaces*  
*table desks*

Currents


type	application	w	d	h	pattern no.	list price
Y-shape table desk, curved end (left hand shown)	left	72"	28-36"	25-30"	<b>AUP Y72DCL4</b> ( ) ( ) ( )	\$803.
	right	72"	28-36"	25-30"	<b>AUP Y72DCR4</b> ( ) ( ) ( )	803.




M-shape table desk, curved ends		72"	30-36"	25-30"	<b>AUP M72DC4</b> ( ) ( ) ( )	803.
---------------------------------	--	-----	--------	--------	-------------------------------	------



Y-shape table desk, flat ends	left	72"	28-36"	25-30"	<b>AUP Y72DFL4</b> ( ) ( ) ( )	803.
	right	72"	28-36"	25-30"	<b>AUP Y72DFR4</b> ( ) ( ) ( )	803.



M-shape table desk, flat ends		72"	31-36"	25-30"	<b>AUP M72DF4</b> ( ) ( ) ( )	803.
-------------------------------	--	-----	--------	--------	-------------------------------	------




Order Code	Specification Information	Application Notes
Example: <b>AUP Y72DCL4 117 117 117 G</b>	Specify top, edge and leg finishes.	Upstart Y and M shape tables combine computer support and adjacent work area in a basic table desk.
<b>A</b> Currents	<i>Casters/glides</i>	Curved end tops facilitate conferencing in open planning. Flat ends plan close to system panels. Overall width is the same for curved and flat end tops.
<b>UP</b> Upstart	<b>C</b> Casters	Upstart tops have plastic laminate surface with continuous T-mold edge.
<b>Y</b> Table shape	<b>G</b> Glides	Upstart tables have four legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 25-30" for glides and 27-31" for casters.
<b>72</b> Width		Adjustment range enables Upstart tables to overlap or slide under adjacent tables and worksurfaces.
<b>D</b> Depth		
<b>C</b> Curved end		
<b>L</b> Left hand		
<b>4</b> Leg quantity		
<b>117</b> Top finish		
<b>117</b> Edge finish		
<b>117</b> Leg finish		
<b>G</b> Glides		


Upstart Tables  
*primary worksurfaces*  
*corner table desks*

Currents

type	w	d	h	pattern no.	list price
Extended corner table desk, 90° extended left	72"	48"	25-30"	<b>AUP C7248S5</b> ( ) ( ) ( )	\$918.



Extended corner table desk, 90° extended right	48"	72"	25-30"	<b>AUP C4872S5</b> ( ) ( ) ( )	918.
--	-----	-----	--------	--------------------------------	------



Corner table desk, 120°	48", 48"	22"	25-30"	<b>AUP V48S5</b> ( ) ( ) ( )	860.
-------------------------	----------	-----	--------	------------------------------	------





Order Code	Specification Information	Application Notes
Example: <b>AUP C7248S5 117 117 117 C</b>	Specify top, edge and leg finishes.	<p>Upstart extended corner and corner shape tables combine computer support and adjacent work area in a basic table desk.</p> <p>Upstart tops have plastic laminate surface with continuous T-mold edge.</p> <p>Upstart tables have four or five legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 25-30" for glides and 27-31" for casters.</p> <p>Adjustment range enables Upstart tables to overlap or slide under adjacent worksurfaces.</p> <p>Extended corner table desks and 120° corner table desk are 22" deep on each side edge. Each back edge of 120° corner desk corresponds to 48" wide Currents linkable screens connected at a 120° angle.</p>
<b>A</b> Currents	<i>Casters/glides</i>	
<b>UP</b> Upstart	C Casters	
<b>C</b> Table shape	G Glides	
<b>72</b> Width, extended left		
<b>48</b> Width		
<b>S</b> Depth		
<b>4</b> Leg quantity		
<b>117</b> Top finish		
<b>117</b> Edge finish		
<b>117</b> Leg finish		
<b>C</b> Casters		



# Upstart Tables

## secondary worksurfaces

Currents

type	w	d	h	pattern no.	list price
 Rectangular table desk, four legs	48"	22"	25-30"	<b>AUP S48S4</b> ( ) ( ) ( )	\$516.
	48"	28"	25-30"	<b>AUP S48D4</b> ( ) ( ) ( )	574.
	60"	28"	25-30"	<b>AUP S60D4</b> ( ) ( ) ( )	631.
	72"	28"	25-30"	<b>AUP S72D4</b> ( ) ( ) ( )	660.
	72"	36"	25-30"	<b>AUP S72E4</b> ( ) ( ) ( )	689.
 Rectangular return, two legs	48"	22"	25-30"	<b>AUP S48S2</b> ( ) ( ) <b>G</b>	402.






Order Code	Specification Information	Application Notes
Example: <b>AUP S72E4 117 117 117 C</b>	Specify top, edge and leg finishes.	Upstart tops have plastic laminate surface with continuous T-mold edge.
<b>A</b> Currents	<i>Casters/glides</i>	Upstart tables have four or five legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 25-30" for glides and 27-31" for casters.
<b>UP</b> Upstart	<b>C</b> Casters	
<b>S</b> Table shape	<b>G</b> Glides	Adjustment range enables Upstart tables to overlap or slide under adjacent worksurfaces.
<b>72</b> Width		Rectangular return with two legs includes flat bracket for attachment to primary worksurface at right angle.
<b>E</b> Depth		
<b>4</b> Leg quantity		
<b>117</b> Top finish		
<b>117</b> Edge finish		
<b>117</b> Leg finish		
<b>C</b> Casters		

Upstart table desks and storage

# Upstart Tables

## conference worksurfaces

Currents



type	w	d	h	pattern no.	list price
Wiper table desk 	61"	32½"	25-30"	<b>AUP W60D4 ( ) ( ) ( )</b>	\$631.
Oval table desk, four legs 	66"	36"	25-30"	<b>AUP O664 ( ) ( ) ( )</b>	803.
Round table desk, four legs 	42"		25-30"	<b>AUP R424 ( ) ( ) ( )</b>	598.
Half round table desk, four legs 	62"	30"	25-30"	<b>AUP D624 ( ) ( ) ( )</b>	631.
Tripod table, three legs 	36"	36"	25-30"	<b>AUP T363 ( ) ( ) ( )</b>	516.

Order Code	Specification Information	Application Notes
Example: <b>AUP O664 117 117 117 G</b>	Specify top, edge and leg finishes.	<p>Upstart conference table desks are designed to support conference work in combination with other worktables or systems furniture.</p> <p>Upstart tops have plastic laminate surface with continuous T-mold edge.</p> <p>Upstart tables have four legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 25-30" for glides and 27-31" for casters.</p> <p>Tops adjust in height to permit conference tops to overlap or roll under adjacent tables.</p> <p>Half round corresponds to back-to-back Y-shape tables or 30" deep straight tables.</p>
<b>A</b> Currents	<i>Casters/glides</i>	
<b>UP</b> Upstart	C Casters	
<b>O</b> Table shape	G Glides	
<b>66</b> Size		
<b>4</b> Leg quantity		
<b>117</b> Top finish		
<b>117</b> Edge finish		
<b>117</b> Leg finish		
<b>G</b> Glides		

# Plannable Upstart Tables

## Rectangular Table Desk

Currents

description	w	d	h	pattern no.	lam.	V2
	30"	23 5/8"	27 3/4" - 32 3/4"	AUPM S30S4 ( ) G ( ) ( ) ( )	\$412.	\$617.
	36"	23 5/8"	27 3/4" - 32 3/4"	AUPM S36S4 ( ) G ( ) ( ) ( )	434.	650.
	42"	23 5/8"	27 3/4" - 32 3/4"	AUPM S42S4 ( ) G ( ) ( ) ( )	459.	687.
	48"	23 5/8"	27 3/4" - 32 3/4"	AUPM S48S4 ( ) G ( ) ( ) ( )	482.	722.
	54"	23 5/8"	27 3/4" - 32 3/4"	AUPM S54S4 ( ) G ( ) ( ) ( )	504.	756.
	60"	23 5/8"	27 3/4" - 32 3/4"	AUPM S60S4 ( ) G ( ) ( ) ( )	528.	791.
	66"	23 5/8"	27 3/4" - 32 3/4"	AUPM S66S4 ( ) G ( ) ( ) ( )	552.	828.
	72"	23 5/8"	27 3/4" - 32 3/4"	AUPM S72S4 ( ) G ( ) ( ) ( )	576.	863.
84"	23 5/8"	27 3/4" - 32 3/4"	AUPM S84S4 ( ) G ( ) ( ) ( )	622.	932.	
	30"	29 5/8"	27 3/4" - 32 3/4"	AUPM S30D4 ( ) G ( ) ( ) ( )	465.	697.
	36"	29 5/8"	27 3/4" - 32 3/4"	AUPM S36D4 ( ) G ( ) ( ) ( )	489.	733.
	42"	29 5/8"	27 3/4" - 32 3/4"	AUPM S42D4 ( ) G ( ) ( ) ( )	513.	769.
	48"	29 5/8"	27 3/4" - 32 3/4"	AUPM S48D4 ( ) ( ) ( ) ( )	535.	802.
	54"	29 5/8"	27 3/4" - 32 3/4"	AUPM S54D4 ( ) ( ) ( ) ( )	564.	846.
	60"	29 5/8"	27 3/4" - 32 3/4"	AUPM S60D4 ( ) ( ) ( ) ( )	588.	882.
	66"	29 5/8"	27 3/4" - 32 3/4"	AUPM S66D4 ( ) ( ) ( ) ( )	601.	902.
	72"	29 5/8"	27 3/4" - 32 3/4"	AUPM S72D4 ( ) ( ) ( ) ( )	615.	921.
84"	29 5/8"	27 3/4" - 32 3/4"	AUPM S84D4 ( ) ( ) ( ) ( )	684.	1,026.	


Order Code	Specification Information	Application Notes
Example: <b>AUPM S72S4 AG 118 114 114</b>	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
<b>A</b> Currents	<i>Grommet/No grommet</i>	<i>Leg finishes, paint</i> See Color Program Page
<b>UP</b> Upstart	A Grommet	24" deep rectangular table desks can only be ordered with glides. 30" deep rectangular table desks in 30", 36" and 42" width can only be ordered with glides.
<b>M</b> Plannable	B No grommet	
<b>S</b> Table Shape	<i>Casters/glides</i>	Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27 3/4" - 31 3/4" for casters and 27 3/4" - 32 3/4" for glides.
<b>72</b> Width	C Casters	
<b>S</b> Depth	G Glides	Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.
<b>4</b> Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
<b>A</b> Grommet	<i>Veneer Goup 2</i> See Color Program Page	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
<b>G</b> Glides	Veneer Group 2 worksurfaces are quartered Techgrain.	
<b>118</b> Top finish		
<b>114</b> Edge finish		
<b>114</b> Leg finish		

Upstart table desks and storage

# Plannable Upstart Tables

## Rectangular Return

Currents

description	w	d	h	pattern no.	lam.	V2
	36"	23 <sup>5</sup> / <sub>8</sub> "	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM S36S2 ( ) ( ) ( ) ( )</b>	\$327.	\$490.
	42"	23 <sup>5</sup> / <sub>8</sub> "	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM S42S2 ( ) ( ) ( ) ( )</b>	352.	527.
	48"	23 <sup>5</sup> / <sub>8</sub> "	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM S48S2 ( ) ( ) ( ) ( )</b>	374.	562.
	60"	23 <sup>5</sup> / <sub>8</sub> "	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM S60S2 ( ) ( ) ( ) ( )</b>	452.	679.


Order Code	Specification Information	Application Notes
Example: <b>AUPM S36S2 AC 118</b> <b>114 114</b>	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
<b>A</b> Currents	<i>Grommet/No grommet</i>	<i>Leg finishes, paint</i> See Color Program Page
<b>UP</b> Upstart	A Grommet	For Veneer Group 2, only black or trim grey edgebands can be specified.
<b>M</b> Plannable	B No grommet	
<b>S</b> Table Shape	<i>Casters/glides</i>	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
<b>36</b> Width	C Casters	Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27 <sup>3</sup> / <sub>4</sub> " - 31 <sup>3</sup> / <sub>4</sub> " for casters and 27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> " for glides.
<b>S</b> Depth	G Glides	
<b>2</b> Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.
<b>A</b> Grommet	<i>Veneer Goup 2</i> See Color Program Page	
<b>C</b> Casters	Veneer Group 2 worksurfaces are quartered Techgrain.	
<b>118</b> Top finish		
<b>114</b> Edge finish		
<b>114</b> Leg finish		

# Plannable Upstart Tables


## corner

Currents

description	w	d	h	pattern no.	lam.	V2
24" D both sides corner worksurfaces	42"	42"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4242S5</b> ( ) ( ) ( ) ( )	\$704.	\$1,056.
	48"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4848S5</b> ( ) ( ) ( ) ( )	761.	1,142.
	60"	60"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C6060S5</b> ( ) C ( ) ( ) ( )	993.	n/a



30" D both sides corner worksurfaces	42"	42"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4242D5</b> ( ) ( ) ( ) ( )	744.	1,116.
	48"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4848D5</b> ( ) ( ) ( ) ( )	801.	1,202.
	60"	60"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C6060D5</b> ( ) C ( ) ( ) ( )	1,033.	n/a



Order Code	Specification Information	Application Notes
Example: <b>AUPM C4242S5 AC 118 114 114</b>	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
<b>A</b> Currents	<i>Grommet/No grommet</i>	Plannable Upstart tops have flat fronts allowing 2 tables to meet at right angles.
<b>UP</b> Upstart	A Grommet	Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27 <sup>3</sup> / <sub>4</sub> " - 31 <sup>3</sup> / <sub>4</sub> " for casters and 27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> " for glides.
<b>M</b> Plannable	B No grommet	
<b>C</b> Table Shape	<i>Casters/glides</i>	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
<b>4242</b> Width	C Casters	
<b>S</b> Depth	G Glides	Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.
<b>5</b> Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
<b>A</b> Grommet	<i>Veneer Goup 2</i> See Color Program Page	
<b>C</b> Casters	Veneer Group 2 worksurfaces are quartered Techgrain.	
<b>118</b> Top finish		
<b>114</b> Edge finish		
<b>114</b> Leg finish		

Upstart table desks and storage


# Plannable Upstart Tables

Currents


*extended corner*

*extended left*


description	w	d	h	pattern no.	lam.	V2
24" D both sides corner worksurface, extended left	60"	36"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C6036S5 ( ) ( ) ( ) ( )</b>	\$623.	\$934.
	60"	42"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C6042S5 ( ) ( ) ( ) ( )</b>	681.	1,021.
	60"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C6048S5 ( ) C ( ) ( ) ( )</b>	739.	1,109.
	72"	36"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C7236S5 ( ) ( ) ( ) ( )</b>	739.	1,109.
	72"	42"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C7242S5 ( ) C ( ) ( ) ( )</b>	797.	1,195.
	72"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C7248S5 ( ) C ( ) ( ) ( )</b>	855.	1,282.
	84"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C8448S5 ( ) C ( ) ( ) ( )</b>	970.	1,455.



30" D both sides corner worksurface, extended left	60"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C6048D5 ( ) C ( ) ( ) ( )</b>	798.	1,196.
	72"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C7248D5 ( ) C ( ) ( ) ( )</b>	913.	1,370.
	84"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C8448D5 ( ) C ( ) ( ) ( )</b>	1,029.	1,542.



30" D left/24" D right corner worksurface, extended left	60"	42"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C6042L5 ( ) C ( ) ( ) ( )</b>	739.	1,109.
	60"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C6048L5 ( ) C ( ) ( ) ( )</b>	798.	1,196.
	72"	42"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C7242L5 ( ) C ( ) ( ) ( )</b>	855.	1,282.
	72"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C7248L5 ( ) C ( ) ( ) ( )</b>	913.	1,370.
	84"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C8448L5 ( ) C ( ) ( ) ( )</b>	1,029.	1,542.




Order Code	Specification Information	Application Notes
Example: <b>AUPM C7236S5 AC 118 114 114</b>	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
<b>A</b> Currents	<i>Grommet/No grommet</i>	Plannable Upstart tops have flat fronts allowing 2 tables to meet at right angles.
<b>UP</b> Upstart	A Grommet	Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27 <sup>3</sup> / <sub>4</sub> " - 31 <sup>3</sup> / <sub>4</sub> " for casters and 27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> " for glides.
<b>M</b> Plannable	B No grommet	
<b>C</b> Table Shape	<i>Casters/glides</i>	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
<b>7236</b> Width	C Casters	
<b>S</b> Depth	G Glides	Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.
<b>5</b> Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
<b>A</b> Grommet	<i>Veneer Goup 2</i> See Color Program Page	
<b>C</b> Casters	Veneer Group 2 worksurfaces are quartered Techgrain.	
<b>118</b> Top finish		
<b>114</b> Edge finish		
<b>114</b> Leg finish		

# Plannable Upstart Tables

*extended corner*

*extended left*

description	w	d	h	pattern no.	lam.	V2
24" D left/30" D right corner worksurface, extended left	60"	42"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C6042R5 ( ) C ( ) ( )</b>	\$739.	\$1,109.
	60"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C6048R5 ( ) C ( ) ( )</b>	798.	1,196.
	72"	42"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C7242R5 ( ) C ( ) ( )</b>	855.	1,282.
	72"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C7248R5 ( ) C ( ) ( )</b>	913.	1,370.
	84"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C8448R5 ( ) C ( ) ( )</b>	1,029.	1,542.



Order Code	Specification Information	Application Notes
Example: <b>AUPM C7236S5 AC 118 114 114</b>	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
<b>A</b> Currents	<i>Grommet/No grommet</i>	Plannable Upstart tops have flat fronts allowing 2 tables to meet at right angles.
<b>UP</b> Upstart	A Grommet	Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27 <sup>3</sup> / <sub>4</sub> " - 31 <sup>3</sup> / <sub>4</sub> " for casters and 27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> " for glides.
<b>M</b> Plannable	B No grommet	
<b>C</b> Table Shape	<i>Casters/glides</i>	Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.
<b>7236</b> Width	C Casters	
<b>S</b> Depth	G Glides	
<b>5</b> Leg quantity	<i>Top finish, plastic laminates</i>	
<b>A</b> Grommet	See Color Program Page	
<b>C</b> Casters	<i>Veneer Goup 2</i>	
<b>118</b> Top finish	See Color Program Page	
<b>114</b> Edge finish	Veneer Group 2 worksurfaces are quartered Techgrain.	
<b>114</b> Leg finish		

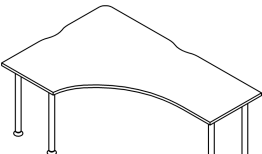
Upstart table desks and storage

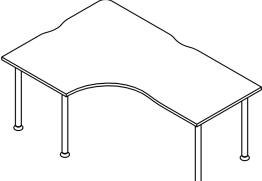
# Plannable Upstart Tables

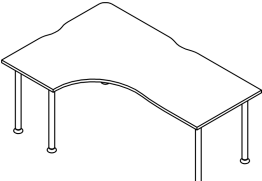
Currents

*extended corner*

*extended right*

description	w	d	h	pattern no.	lam.	V2
24" D both sides corner worksurface, extended right 	36"	60"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C3660S5 ( ) ( ) ( ) ( )</b>	\$623.	\$934.
	36"	72"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C3672S5 ( ) ( ) ( ) ( )</b>	739.	1,109.
	42"	60"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4260S5 ( ) ( ) ( ) ( )</b>	681.	1,021.
	42"	72"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4272S5 ( ) C ( ) ( ) ( )</b>	797.	1,195.
	48"	60"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4860S5 ( ) C ( ) ( ) ( )</b>	739.	1,109.
	48"	72"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4872S5 ( ) C ( ) ( ) ( )</b>	855.	1,282.
48"	84"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4884S5 ( ) C ( ) ( ) ( )</b>	970.	1,455.	

30" D both sides corner worksurface, extended right 	48"	60"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4860D5 ( ) C ( ) ( ) ( )</b>	798.	1,196.
	48"	72"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4872D5 ( ) C ( ) ( ) ( )</b>	913.	1,370.
	48"	84"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4884D5 ( ) C ( ) ( ) ( )</b>	1,029.	1,542.

24" D left/30" D right corner worksurface, extended right 	42"	60"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4260R5 ( ) C ( ) ( ) ( )</b>	739.	1,109.
	42"	72"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4272R5 ( ) C ( ) ( ) ( )</b>	855.	1,282.
	48"	60"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4860R5 ( ) C ( ) ( ) ( )</b>	798.	1,196.
	48"	72"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4872R5 ( ) C ( ) ( ) ( )</b>	913.	1,370.
	48"	84"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM C4884R5 ( ) C ( ) ( ) ( )</b>	1,029.	1,542.

Order Code	Specification Information	Application Notes
Example: <b>AUPM C4872S5 AC 118 114 114</b>	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
<b>A</b> Currents	<i>Grommet/No grommet</i>	Plannable Upstart tops have flat fronts allowing 2 tables to meet at right angles.
<b>UP</b> Upstart	A Grommet	Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27 <sup>3</sup> / <sub>4</sub> " - 31 <sup>3</sup> / <sub>4</sub> " for casters and 27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> " for glides.
<b>M</b> Plannable	B No grommet	
<b>C</b> Table Shape	<i>Casters/glides</i>	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
<b>4872</b> Width	C Casters	
<b>S</b> Depth	G Glides	Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.
<b>5</b> Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
<b>A</b> Grommet	<i>Veneer Goup 2</i> See Color Program Page	
<b>C</b> Casters	Veneer Group 2 worksurfaces are quartered Techgrain.	
<b>118</b> Top finish		
<b>114</b> Edge finish		
<b>114</b> Leg finish		




# Plannable Upstart Tables

*extended corner*

*extended right*

description	w	d	h	pattern no.	lam.	V2
30" D left/24" D right corner worksurface, extended right	42"	60"	27 3/4" - 32 3/4"	<b>AUPM C4260L5 ( ) C ( ) ( )</b>	\$739.	\$1,109.
	42"	72"	27 3/4" - 32 3/4"	<b>AUPM C4272L5 ( ) C ( ) ( )</b>	855.	1,282.
	48"	60"	27 3/4" - 32 3/4"	<b>AUPM C4860L5 ( ) C ( ) ( )</b>	798.	1,196.
	48"	72"	27 3/4" - 32 3/4"	<b>AUPM C4872L5 ( ) C ( ) ( )</b>	913.	1,370.
	48"	84"	27 3/4" - 32 3/4"	<b>AUPM C4884L5 ( ) C ( ) ( )</b>	1,029.	1,542.



Order Code	Specification Information	Application Notes
Example: <b>AUPM C4872S5 AC 118 114 114</b>	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
<b>A</b> Currents	<i>Grommet/No grommet</i>	Plannable Upstart tops have flat fronts allowing 2 tables to meet at right angles.
<b>UP</b> Upstart	A Grommet	Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27 3/4" - 31 3/4" for casters and 27 3/4" - 32 3/4" for glides.
<b>M</b> Plannable	B No grommet	
<b>C</b> Table Shape	<i>Casters/glides</i>	Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.
<b>4872</b> Width	C Casters	
<b>S</b> Depth	G Glides	
<b>5</b> Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
<b>A</b> Grommet	<i>Veneer Goup 2</i> See Color Program Page	
<b>C</b> Casters	Veneer Group 2 worksurfaces are quartered Techgrain.	
<b>118</b> Top finish		
<b>114</b> Edge finish		
<b>114</b> Leg finish		


Upstart table desks and storage

# Plannable Upstart Tables


## *half round and P-shapes*

Currents


description	w	d	h	pattern no.	lam.	V2
Half round table desk, four legs	59"	30"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM D594 ( ) G ( ) ( )</b>	\$588.	\$882.
	60"	30"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM D604 ( ) G ( ) ( )</b>	588.	882.



P-shape surface, extended right	48"	75"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM P4875S5 ( ) C ( ) ( )</b>	983.	1,475.
---------------------------------	-----	-----	---	-----------------------------------	------	--------



P-shape surface, extended left	75"	48"	27 <sup>3</sup> / <sub>4</sub> " - 32 <sup>3</sup> / <sub>4</sub> "	<b>AUPM P7548S5 ( ) C ( ) ( )</b>	983.	1,475.
--------------------------------	-----	-----	---	-----------------------------------	------	--------



### Order Code

Example:	<b>AUPM P4875S5 AC 118</b>
	<b>114 114</b>
<b>A</b>	Currents
<b>UP</b>	Upstart
<b>M</b>	Plannable
<b>P</b>	Table Shape
<b>4875</b>	Width
<b>S</b>	Depth
<b>5</b>	Leg quantity
<b>A</b>	Grommet
<b>C</b>	Casters
<b>118</b>	Top finish
<b>114</b>	Edge finish
<b>114</b>	Leg finish

### Specification Information

Specify:	
<i>Grommet/No grommet</i>	
A	Grommet
B	No grommet
<i>Casters/glides</i>	
C	Casters
G	Glides
<i>Top finish, plastic laminates</i>	
	See Color Program Page
<i>Veneer Goup 2</i>	
	See Color Program Page
	Veneer Group 2 worksurfaces are quartered Techgrain.

### Application Notes

*Edge finishes, T-mold*  
See Color Program Page

*Leg finishes, paint*  
See Color Program Page

For Veneer Group 2, only black or trim grey edgebands can be specified.

Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.

Plannable Upstart tops have flat fronts allowing 2 tables to meet at right angles.



Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27<sup>3</sup>/<sub>4</sub>" - 31<sup>3</sup>/<sub>4</sub>" for casters and 27<sup>3</sup>/<sub>4</sub>" - 32<sup>3</sup>/<sub>4</sub>" for glides.

Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.

# Plannable Upstart Tables






*straight leg only*

Currents

description	h	pattern no.	Paint
Straight leg with glide 	26 <sup>5</sup> / <sub>8</sub> " - 31 <sup>5</sup> / <sub>8</sub> "	AUPM SGV ( )	\$80.
Straight leg with caster 	26 <sup>5</sup> / <sub>8</sub> " - 30 <sup>5</sup> / <sub>8</sub> "	AUPM SCV ( )	80.

Order Code	Specification Information	Application Notes
Example: <b>AUPM SC 114</b>	Specify:	<p><b>Plannable Upstart straight leg may not be used with Original Upstart tables due to stability issues.</b></p>
<b>A</b> Currents <b>UP</b> Upstart <b>M</b> Plannable <b>S</b> Straight leg <b>C</b> Casters <b>114</b> Leg finish	<i>Casters/glides</i> C Casters G Glides  <i>Leg finishes, paint</i> See Color Program Page	
		<p>Each straight Plannable Upstart leg comes with four (4) metal inserts and four (4) screws.</p> <p>Straight Plannable Upstart legs must be positioned in accordance with BIFMA guidelines.</p> <p>Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27<sup>3</sup>/<sub>4</sub>" - 31<sup>3</sup>/<sub>4</sub>" for casters and 27<sup>3</sup>/<sub>4</sub>" - 32<sup>3</sup>/<sub>4</sub>" for glides.</p>




Upstart table desks and storage

type	w	d	h	pattern no.	list price
Flat bracket 	3 1/2"	14"		<b>AB1 F24</b>	\$29.
Cable tray 	20"	2"	6"	<b>AR1 CB</b>	105.
Carpet grips (set of 10) 				<b>MM2-CG</b>	17.
Non skid grips (set of 10) 				<b>AA1-NSK</b>	29.
Pencil drawer 	12"	15 1/8"	3"	<b>AUP PDU</b>	104.

Order Code	Specification Information	Application Notes
Example: <b>AA1-NSK</b>		
<b>A</b> Currents	Flat bracket and cable tray are black, painted steel.	Flat bracket attaches return worksurface to primary worksurface at right angle.
<b>A1</b> Accessory	Pencil drawer is integral color, light grey.	Cable tray attaches beneath stiffener under table surface to accommodate transformers or a bundle of cable.
<b>NSK</b> Non skid grips		Carpet grips snap into underside of Upstart leveling glides for traction on carpeted floors.  Non-skid grips snap into leveling glides for traction on hard-surface floors.  Pencil drawer attaches to the underside of a worksurface at any location.

# Upstart Privacy Screens for Upstart tables

Currents

type	application	w	d	h	pattern no.	list price	
	Polycarbonate screen, back of table	36"	3/4"	24"	<b>AUP B3624RC ( )</b>	\$369.	
		48"	3/4"	24"	<b>AUP B4824RC ( )</b>	420.	
		60"	3/4"	24"	<b>AUP B6024RC ( )</b>	484.	
		72"	3/4"	24"	<b>AUP B7224RC ( )</b>	528.	
	Marker surface screen, back of table	36"	3/4"	24"	<b>AUP B3624M ( )</b>	369.	
		48"	3/4"	24"	<b>AUP B4824M ( )</b>	420.	
		60"	3/4"	24"	<b>AUP B6024M ( )</b>	484.	
		72"	3/4"	24"	<b>AUP B7224M ( )</b>	528.	
	Magnet rail	36" screen	18"	1/4"	2"	<b>AUP MR36 ( )</b>	42.
		48" screen	30"	1/4"	2"	<b>AUP MR48 ( )</b>	49.
		60" screen	36"	1/4"	2"	<b>AUP MR60 ( )</b>	53.
		72" screen	48"	1/4"	2"	<b>AUP MR72 ( )</b>	57.

## Order Code

Example:	<b>AUP B7224 RC 117</b>
<b>A</b>	Currents
<b>UP</b>	Upstart
<b>B</b>	Back of worksurface
<b>72</b>	Width
<b>24</b>	Height
<b>RC</b>	Polycarbonate
<b>117</b>	Paint finish

## Specification Information

Specify surface type and painted finish for screen frame, brackets and magnet rail.

### Surface type:

RC	Ribbed polycarbonate
M	Marker Surface

## Application Notes

Upstart screens mount on the back of Upstart tables to provide partial enclosure above and below worksurface height.

Screens have a translucent, ribbed polycarbonate or marker surface core. Perimeter frame is painted steel with trim grey molded corner blocks.

Screens include brackets that mount to matching holes under Upstart tables of the same width. Bracket holes are also provided for mounting two 36" wide screens on a 72" wide Upstart table.

Screen mounts in two positions, creating enclosure to a height of 39" or 48" when the table top is adjusted to 28".

Screens may be shared between desks in back to back configurations.

Magnet rails span between screen mounting brackets to hang paper documents.


Magnet rails correspond in width to privacy screens.


Please refer to Introduction page for table and screen dimensions.


# Plannable Upstart Privacy Screens

## back screens

Currents

description	type	w	d	h	pattern no.	10	15	20	30	35	40	45
 Back of worksurface screens to 42"H		30"	3/4"	15"	<b>MZ1-B3015-()</b>	\$172.	\$194.	\$199.	\$218.	\$230.	\$245.	\$272.
		36"	3/4"	15"	<b>MZ1-B3615-()</b>	207.	224.	230.	253.	265.	278.	300.
		42"	3/4"	15"	<b>MZ1-B4215-()</b>	253.	265.	274.	301.	319.	327.	350.
		48"	3/4"	15"	<b>MZ1-B4815-()</b>	284.	295.	304.	334.	352.	374.	399.
		54"	3/4"	15"	<b>MZ1-B5415-()</b>	331.	342.	351.	388.	408.	424.	450.
		60"	3/4"	15"	<b>MZ1-B6015-()</b>	365.	372.	385.	422.	444.	472.	500.
		66"	3/4"	15"	<b>MZ1-B6615-()</b>	398.	401.	n/a	n/a	480.	n/a	n/a
		72"	3/4"	15"	<b>MZ1-B7215-()</b>	428.	444.	n/a	n/a	528.	n/a	n/a
	78"	3/4"	15"	<b>MZ1-B7815-()</b>	473.	488.	n/a	n/a	580.	n/a	n/a	

 Back of worksurface screens to overhead support height, 46"H		30"	3/4"	19"	<b>MZ1-B3019-()</b>	219.	237.	245.	268.	282.	293.	320.
		36"	3/4"	19"	<b>MZ1-B3619-()</b>	270.	283.	291.	321.	334.	343.	364.
		42"	3/4"	19"	<b>MZ1-B4219-()</b>	319.	326.	333.	370.	388.	408.	431.
		48"	3/4"	19"	<b>MZ1-B4819-()</b>	363.	371.	380.	419.	442.	484.	492.
		54"	3/4"	19"	<b>MZ1-B5419-()</b>	412.	415.	429.	473.	496.	507.	538.
		60"	3/4"	19"	<b>MZ1-B6019-()</b>	444.	458.	472.	520.	547.	553.	589.
		66"	3/4"	19"	<b>MZ1-B6619-()</b>	490.	501.	n/a	n/a	597.	n/a	n/a
		72"	3/4"	19"	<b>MZ1-B7219-()</b>	538.	548.	n/a	n/a	651.	n/a	n/a
	78"	3/4"	19"	<b>MZ1-B7819-()</b>	587.	594.	n/a	n/a	707.	n/a	n/a	


 Back of worksurface screens, to Reuter overhead support height, 49"H		30"	3/4"	22"	<b>MZ1-B3022-()</b>	268.	281.	289.	320.	333.	343.	365.
		36"	3/4"	22"	<b>MZ1-B3622-()</b>	330.	342.	351.	387.	407.	414.	429.
		42"	3/4"	22"	<b>MZ1-B4222-()</b>	380.	387.	399.	440.	460.	488.	511.
		48"	3/4"	22"	<b>MZ1-B4822-()</b>	444.	445.	459.	508.	533.	542.	590.
		54"	3/4"	22"	<b>MZ1-B5422-()</b>	489.	490.	508.	562.	590.	598.	630.
		60"	3/4"	22"	<b>MZ1-B6022-()</b>	520.	545.	562.	620.	651.	657.	680.
		66"	3/4"	22"	<b>MZ1-B6622-()</b>	582.	606.	n/a	n/a	718.	n/a	n/a
		72"	3/4"	22"	<b>MZ1-B7222-()</b>	649.	650.	n/a	n/a	772.	n/a	n/a
	78"	3/4"	22"	<b>MZ1-B7822-()</b>	697.	700.	n/a	n/a	832.	n/a	n/a	

Order Code	Specification Information	Application Notes
Example: <b>MZ1-B6619-15-W210/2</b> <b>MZ1</b> Morrison Network privacy screen <b>B</b> Back of worksurface <b>66</b> Width <b>19</b> Height <b>15</b> Surface type and group no. <b>W210/2</b> Upholstery	<i>Surface type:</i> 10- Fabric group 10 15- Fabric group 15 20- Fabric group 20 30- Fabric group 30 35- Fabric group 35 40- Fabric group 40 45- Fabric group 45  * Morrison Network screens may be used with Plannable Upstart tables. Refer to front of Upstart price book for planning information.	Back of worksurface screens provide visual barrier and tackable surface from underside of worksurface to a height of 42", 46" or 49".  Screen widths should correspond to straight worksurface width, or sum of VDT corner and return widths.  Use back of worksurface screen for VDT applications where one side is backed by a vertical panel.  VDT worksurfaces will accept back screens on only one back edge.  Back screens may not be used at the end of a straight worksurface; use end screens in this application.  Privacy screens are not available in a combination of fabrics.  Back of worksurface screens are full dimension: two smaller screens may be substituted for a larger one. For example, if using fabric grades 20-70, specify two 36" screens for a 72" surface.
		Between back-to-back straight or VDT worksurfaces specify a single 3/4" back screen. This allows back-to-back 23 5/8"D or 29 5/8"D worksurfaces to plan on a precise 6" module.  15" high screens are used for a 42" horizon.  19"H screens are used to fill in space between worksurface and Morrison overhead.  22"H screens fill the space between worksurface and Reuter overhead.  All but shared end screens start at the bottom of the worksurface.  Privacy screens are supported by brackets fastened at worksurface inserts. Privacy screens include mounting brackets, insert kit, and stiffener clip.  For replacement screen stiffeners see Accessories page.  Privacy screens may be specified to achieve ASTM E-84 Class "A" flamespread rating.

# Plannable Upstart Privacy Screens

## VDT screens

Currents



description	type	w	d	h	pattern no.	10	15	20	30	35	40	45
Back of VDT screens 	To 42"H	35 <sup>5</sup> / <sub>8</sub> "	3/4"	15"	<b>MZ1-V3615-()</b>	\$207.	\$224.	\$230.	\$245.	\$253.	\$272.	\$300.
		41 <sup>5</sup> / <sub>8</sub> "	3/4"	15"	<b>MZ1-V4215-()</b>	253.	265.	274.	293.	300.	320.	350.
		47 <sup>5</sup> / <sub>8</sub> "	3/4"	15"	<b>MZ1-V4815-()</b>	284.	295.	304.	327.	342.	364.	399.
		59 <sup>5</sup> / <sub>8</sub> "	3/4"	15"	<b>MZ1-V6015-()</b>	361.	374.	387.	413.	429.	457.	495.
		71 <sup>5</sup> / <sub>8</sub> "	3/4"	15"	<b>MZ1-V7215-()</b>	437.	451.	n/a	n/a	517.	n/a	n/a
	To 46"H	35 <sup>5</sup> / <sub>8</sub> "	3/4"	19"	<b>MZ1-V3619-()</b>	273.	282.	291.	309.	319.	332.	364.
		41 <sup>5</sup> / <sub>8</sub> "	3/4"	19"	<b>MZ1-V4219-()</b>	319.	326.	333.	357.	372.	399.	431.
		47 <sup>5</sup> / <sub>8</sub> "	3/4"	19"	<b>MZ1-V4819-()</b>	363.	372.	385.	409.	415.	445.	492.
		59 <sup>5</sup> / <sub>8</sub> "	3/4"	19"	<b>MZ1-V6019-()</b>	454.	471.	487.	528.	550.	585.	634.
		71 <sup>5</sup> / <sub>8</sub> "	3/4"	19"	<b>MZ1-V7219-()</b>	545.	568.	n/a	n/a	661.	n/a	n/a
	To 49"H	35 <sup>5</sup> / <sub>8</sub> "	3/4"	22"	<b>MZ1-V3622-()</b>	330.	342.	351.	375.	379.	399.	429.
		41 <sup>5</sup> / <sub>8</sub> "	3/4"	22"	<b>MZ1-V4222-()</b>	380.	387.	399.	419.	443.	478.	511.
		47 <sup>5</sup> / <sub>8</sub> "	3/4"	22"	<b>MZ1-V4822-()</b>	444.	447.	461.	490.	491.	492.	590.
		59 <sup>5</sup> / <sub>8</sub> "	3/4"	22"	<b>MZ1-V6022-()</b>	527.	547.	564.	613.	640.	678.	736.
		71 <sup>5</sup> / <sub>8</sub> "	3/4"	22"	<b>MZ1-V7222-()</b>	630.	657.	n/a	n/a	769.	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>MZ1-V4822-15-W210/2</b> <b>MZ1</b> Morrison Network privacy screen <b>V</b> VDT <b>48</b> Width <b>22</b> Height <b>15</b> Surface type and group no. <b>W210/2</b> Upholstery	<p><i>Surface type:</i></p> 10- Fabric group 10 15- Fabric group 15 20- Fabric group 20 30- Fabric group 30 35- Fabric group 35 40- Fabric group 40 45- Fabric group 45	Privacy screens are supported by brackets fastened at worksurface inserts. Privacy screens include mounting brackets, insert kit and stiffener clip.  15" high screens are used for a 42" horizon.  19"H screens are used to fill in space between worksurface and desk mounted Morrison Network overheads.  22"H screens fill the space between worksurface and desk mounted Reuter overheads.  Privacy screens may be specified to achieve ASTM E-84 Class "A" flamespread rating.
	VDT worksurfaces will not accept back screens on both back edges. Use VDT screens on at least one back edge.  VDT screens are not in pairs; specify one for each back edge or one VDT screen and one back screen.	* Morrison Network screens may be used with Plannable Upstart tables. Refer to front of Upstart price book for planning information.

# Plannable Upstart Privacy Screens

## end screens

Currents



description	type	w	d	h	pattern no.	10	15	20	30	35	40	45
 End screens for outside application	To 42"H	24"	3/4"	15"	<b>MZ1-E2415-W/U-( )</b>	\$164.	\$188.	\$193.	\$202.	\$214.	\$233.	\$265.
		30"	3/4"	15"	<b>MZ1-E3015-W/U-( )</b>	182.	200.	207.	222.	233.	248.	282.
	To 46"H	24"	3/4"	19"	<b>MZ1-E2419-W/U-( )</b>	198.	215.	219.	239.	247.	265.	296.
		30"	3/4"	19"	<b>MZ1-E3019-W/U-( )</b>	228.	247.	253.	272.	281.	296.	330.
	To 49"H	24"	3/4"	22"	<b>MZ1-E2422-W/U-( )</b>	233.	246.	251.	270.	281.	298.	329.
		30"	3/4"	22"	<b>MZ1-E3022-W/U-( )</b>	278.	293.	299.	321.	328.	348.	379.
 End screens for shared application	To 42"H	24"	3/4"	13"	<b>MZ1-S2415-W/U-( )</b>	158.	179.	186.	195.	206.	224.	254.
		30"	3/4"	13"	<b>MZ1-S3015-W/U-( )</b>	172.	194.	199.	213.	224.	238.	272.
	To 46"H	24"	3/4"	17"	<b>MZ1-S2419-W/U-( )</b>	190.	207.	213.	227.	238.	254.	287.
		30"	3/4"	17"	<b>MZ1-S3019-W/U-( )</b>	219.	237.	245.	261.	270.	287.	320.
	To 49"H	24"	3/4"	20"	<b>MZ1-S2422-W/U-( )</b>	222.	236.	241.	259.	270.	288.	319.
		30"	3/4"	20"	<b>MZ1-S3022-W/U-( )</b>	268.	281.	289.	309.	319.	332.	365.

Order Code	Specification Information	Application Notes
Example: <b>MZ1-S3019W15-W210/2</b>	<i>Surface type:</i>	End screens must be used at the end of straight or rounded end worksurfaces.
<b>MZ1</b> Morrison Network privacy screen	10- Fabric group 10	End screens for outside application cover the end of the worksurface and align with adjacent back screens.
<b>S</b> Shared	15- Fabric group 15	
<b>30</b> Width	20- Fabric group 20	
<b>19</b> Height	30- Fabric group 30	
<b>W</b> For 1 3/4" worksurface	35- Fabric group 35	
<b>15</b> Surface type and group no.	40- Fabric group 40	End screens for shared application begin above the worksurface to allow modular planning when straight worksurfaces are end-to-end.
<b>W210/2</b> Upholstery	45- Fabric group 45	
	<i>End screens specify:</i>	When specifying end screens under 64"H panel mounted Morrison Network overheads with task lights, only screens to 42"H will fit.
	W- For use with 1 3/4" thick worksurfaces	With 64"H panel-mounted Reuter overheads any screen up to 49"H may be planned perpendicular to storage.
	U- For use with 1 1/4" thick worksurfaces	
	* Morrison Network screens may be used with Plannable Upstart tables. Refer to front of Upstart price book for planning information.	
		Privacy screens are supported by brackets fastened at worksurface inserts. Privacy screens include mounting brackets, insert kit and stiffener clip.
		15" high screens are used for a 42" horizon.
		19"H screens are used to fill in space between worksurface and desk mounted Morrison Network overheads.
		22"H screens fill the space between worksurface and desk mounted Reuter overheads.
		All but shared end screens start at the bottom of the worksurface.
		Privacy screens may be specified to achieve ASTM E-84 Class "A" flamespread rating.



# Upstart Storage cart



Currents

type	application	w	d	h	pattern no.	list price
	locking	16 1/4"	22 1/2"	23"	<b>AUP C L ( )</b>	\$459.
	non locking	16 1/4"	22 1/2"	23"	<b>AUP C ( )</b>	424.
	locking	16 1/4"	22 1/2"	23"	<b>AUP C DL ( )</b>	505.
	non locking	16 1/4"	22 1/2"	23"	<b>AUP C D ( )</b>	470.
Vertical divider					<b>AUP VP3</b>	75.


Order Code	Specification Information	Application Notes
Example: <b>AUP CDL U</b>		
<b>A</b> Currents		
<b>UP</b> Upstart		
<b>C</b> Cart		
<b>D</b> Drawer		
<b>L</b> Lock		
<b>U</b> Light grey		
	<p>Cart includes integral color file tub and top frame, with translucent polycarbonate receding top. Legs are natural anodized aluminum with non-locking casters. Personal drawer is integral color light grey with a concealed slide lock inside the tub.</p> <p>Divider is light grey, perforated painted steel.</p> <p><i>Integral color finish for file tub and top frame:</i></p> <p>U Light grey G1 Glider grey</p>	<p>Upstart cart combines filing and personal storage in an accessible, mobile unit designed to roll under Upstart tables. The cart is not intended to be a mobile seat.</p> <p>Cart includes letter width/legal depth file tub with translucent, receding top.</p> <p>File carts with drawer include 3" high personal storage drawer under files.</p> <p>File cart may be specified with lock.</p>


# Upstart Storage tower


Currents


type	application	description	w	d	h	pattern no.	P1/P2	P3	P1/P2-V2	P3/V2	P1/P2-V3	P3/V3
	active door, 1 file tub, 4 CD tubs	casters	24"	25"	48"	<b>AUP T48E LCT ( )()</b>	\$2,014.	\$2,292.	\$2,222.	\$2,362.	\$2,431.	\$2,569.
		glides	24"	25"	48"	<b>AUP T48E LGT ( )()</b>	2,152.	2,431.	2,362.	2,500.	2,569.	2,708.
	active door, 3 file tubs, 1 CD tub	casters	24"	25"	48"	<b>AUP T48A LCT ( )()</b>	2,014.	2,292.	2,222.	2,362.	2,431.	2,569.
		glides	24"	25"	48"	<b>AUP T48A LGT ( )()</b>	2,152.	2,431.	2,362.	2,500.	2,569.	2,708.
	active door, 1 file tub, 4 CD tubs	casters	24"	25"	48"	<b>AUP T48E RCT ( )()</b>	2,014.	2,292.	2,222.	2,362.	2,431.	2,569.
		glides	24"	25"	48"	<b>AUP T48E RGT ( )()</b>	2,152.	2,431.	2,362.	2,500.	2,569.	2,708.
	active door, 3 file tubs, 1 CD tub	casters	24"	25"	48"	<b>AUP T48A RCT ( )()</b>	2,014.	2,292.	2,222.	2,362.	2,431.	2,569.
		glides	24"	25"	48"	<b>AUP T48A RGT ( )()</b>	2,152.	2,431.	2,362.	2,500.	2,569.	2,708.
Shelf Insert			20 1/2"	14 1/2"	3/4"	<b>AUPTS</b>						118.

Order Code	Specification Information	Application Notes
Example: <b>AUP T48A LCT 117 117</b>	Specify:	Bright White ( 118 ) and Silver ( 613 ) are P3 paint finishes.
<b>A</b> Currents		
<b>UP</b> Upstart		
<b>T</b> Tower		
<b>48</b> Height	<i>Door configuration:</i>	Upstart tower provides shelf, file, CD and personal storage in a compact, luminous enclosure.
<b>A</b> Door configuration	A Active door, 3 files, 1 CD	Towers include painted finish top and bottom, two shelves, molded translucent side and back panels, clear satin anodized aluminum posts, and hinged door with lock.
<b>L</b> Left	E Active door, 1 file, 4 CD	Doors may be specified with painted or veneer finish.
<b>C</b> Casters	<i>Specify:</i>	Side panels support adjustable shelves on a 3" grid.
<b>T</b> Side panels	L Left hinge	
<b>117</b> Top and base finish	R Right hinge	
<b>117</b> door finish	C Casters	Active door includes tilting bins for 5" deep, letter or legal files and CDs or personal items.
	G Glides	Upstart towers are designed for rapid assembly on site.
	<i>Specify top and base finish and door finish.</i>	

type	shelves	configuration	width	depth	height	pattern no.
	Ice	High	25"	17"	29"	<b>BB-29-NOP-CE8</b>
	Ice	Low	25"	17"	21"	<b>BB-21-NOP-CE8</b>
	Ice	Medium	25"	17"	23"	<b>BB-23-NOP-CE8</b>
	Snow	High	25"	17"	29"	<b>BB-29-NOP-SN8</b>
	Snow	Low	25"	17"	21"	<b>BB-21-NOP-SN8</b>
	Snow	Medium	25"	17"	23"	<b>BB-23-NOP-SN8</b>

type	shelves	configuration	width	depth	height	pattern no.
	Ice	High	25"	17"	29"	<b>BB-29-3PL-CE8</b>
	Ice	Low	25"	17"	21"	<b>BB-21-3PL-CE8</b>
	Ice	Medium	25"	17"	23"	<b>BB-23-3PL-CE8</b>
	Snow	High	25"	17"	29"	<b>BB-29-3PL-SN8</b>
	Snow	Low	25"	17"	21"	<b>BB-21-3PL-SN8</b>
	Snow	Medium	25"	17"	23"	<b>BB-23-3PL-SN8</b>

type	shelves	configuration	width	depth	height	pattern no.
	Ice	Low	25"	17"	21"	<b>BB-21-3PD-CE8</b>
	Ice	Medium	25"	17"	23"	<b>BB-23-3PD-CE8</b>
	Snow	Low	25"	17"	21"	<b>BB-21-3PD-SN8</b>
	Snow	Medium	25"	17"	23"	<b>BB-23-3PD-SN8</b>

type	shelves	configuration	width	depth	height	pattern no.
	Ice	High	22"	14"	1/8"	<b>BB-SH</b>
	Maximum of 2 recommended, metal shelf in metallic grey finish					

\* For pricing please refer to the KnollExtra price list.

Order Code	Ordering Information	Custom Option
<i>Example:</i> <b>BB-23-3PL-SN8-PW</b>	<i>Specify:</i>	Customers can use material for panels of 1/8" thickness, including Imago.  Please contact your KnollExtra or Customer Service Representative for pricing.
<b>BB</b>	<i>Hgt:</i>	
<b>21</b>	Low	
<b>23</b>	Medium	
<b>29</b>	High	
<b>3PL</b>	<i>Conf:</i>	
<b>SN8</b>	Open	
<b>PW</b>	3PL Three panels with the width side open	
<b>BB-SH</b>	3PD Three panels and a door	
	<i>Color:</i>	
<b>CE8</b>	Ice	
<b>SN8</b>	Snow	
	<i>Side panels (if applicable):</i>	
	<i>Grade A</i>	
	VW Vapor White	
	JB Jet Black	
	GC Grey Cloud	
	SK Sky Blue	
	<i>Grade B</i>	
	PW Pulsar White	
	BH Black Hole	
	CL Clear	
	SM SM	
	SE SE	
	GL Green Light	

Upstart table desks and storage

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
A1 R1 SI	103, 104	AA1LO24DN	109	AA1RWC44	136	AB1 FAE	96
A1 RTOPL	103, 104	AA1LO30DN	109	AA1RWC45	136	AB1 FE	96
A1 RTOPR	103, 104	AA1LO36DN	109	AA1RWC46	136	AB1 I25(G/C)	97
A2 R48 LL	103	AA1LO42DN	109	AA1RWC47	136	AB1 I27A(G/C)	97
A2 R48 LP	103	AA1LO48DN	109	AA1RWC53	136	AB1 I27F(G/C)	97
A2 R48 LV	103	AA1MET30	37	AA1RWC54	136	AB1 VL	97
A2 R48 RL	103	AA1MET39	37	AA1RWC55	136	AB1-ABC24	96
A2 R48 RP	103	AA1MET42	37	AA1RWC63	136	AB2 AE	96
A2 R48 RV	103	AA1MET48	37	AA1RWC64	136	AB2 FE27	96
A2 R64 LP	103	AA1MET56	37	AA1RWC74	136	AB2 FE28	96
A2 R64 RP	103	AA1MET64	37	AA1RWL36	136	AC 24 C 2 C	129, 130
A2L 48 LL	104	AA1MET74	37	AA1RWL42	136	AC 24 C 2 C N	131
A2L 48 LP	104	AA1MET80	37	AA1RWL48	136	AC 24 C 2 G	129, 130
A2L 48 LV	104	AA1MPS30	37	AA1RWL60	136	AC 24 C 2 G N	131
A2L 48 RL	104	AA1MPS39	37	AA1RWL72	136	AC 30 C 2 C	129, 130
A2L 48 RP	104	AA1MPS42	37	AA1RWL84	136	AC 30 C 2 C N	131
A2L 48 RV	104	AA1MPS48	37	AA1RWR36	136	AC 30 C 2 G	129, 130
A2L 64 LP	104	AA1MPS56	37	AA1RWR42	136	AC 30 C 2 G N	131
A2L 64 RP	104	AA1MPS64	37	AA1RWR48	136	AC 3A 11	134, 135
AA139E	57	AA1MPS74	37	AA1RWR60	136	AC 3A 22	134, 135
AA148E	57	AA1MPS80	37	AA1RWR72	136	AC 3A 23	134, 135
AA164E	57	AA1MRS	37	AA1RWR84	136	AC 3A 32	134, 135
AA1B	60	AA1NSK	33, 57	AA1T06	57	AC 3B 11	132, 133
AA1BP6	137	AA1-NSK	164	AA1T18	57	AC 3B 22	132, 133
AA1C36T	112	AA1OR	27	AA1T24	57	AC 3B 23	132, 133
AA1CET39	37	AA1ORD	27	AA1T30	57	AC 3B 32	132, 133
AA1CET48	37	AA1PM	150	AA1T36	57	AC 4A 11	134, 135
AA1CET64	37	AA1PMCC	150	AA1T42	57	AC 4A 22	134, 135
AA1CG	33	AA1PMCIA	150	AA1T48	57	AC 4A 23	134, 135
AA1DD	138, 140	AA1PS24	111	AA1T60	57	AC 4A 32	134, 135
AA1DT36	146	AA1RE	57	AA1UA39	42	AC 4B 11	132, 133
AA1DT42	146	AA1RODN	109	AA1UA48	42	AC 4B 22	132, 133
AA1DT48	146	AA1ROUP	109	AA1UA64	42	AC 4B 23	132, 133
AA1DT60	146	AA1ROXUP	109	AA1UPS39	42	AC 4B 32	132, 133
AA1DT72	146	AA1RPS34	40	AA1UPS48	42	AC1 39E1	58
AA1DT84	146	AA1RPS42	40	AA1UPS64	42	AC1 39L2	58
AA1DW	138, 140	AA1RPS49	40	AA1WS24	142	AC1 39T3	58
AA1ECUP64	109	AA1RPS64	40	AA1WS30	142	AC1 39V2	59
AA1ECUP65	109	AA1RPS79	40	AA1WS36	142	AC1 39X4	58
AA1EDWS	109	AA1RS11	146	AA1WS48	142	AC1 39Y3	59
AA1EPS40	39	AA1RS20	146	AA1WSD	142	AC1 48E1	58
AA1EPS48	39	AA1RSDN	109	AA2 MTC	37, 43	AC1 48L2	58
AA1EPS53	39	AA1RSOC11	146	AA2 UTC	42, 43	AC1 48T3	58
AA1EPS60	39	AA1RSOC20	146	AA2T5E19	142	AC1 48V2	59
AA1EPS65	39	AA1RSUP	109	AA2T5E25	142	AC1 48X4	58
AA1FCET39	44	AA1RSXDN	109	AA2T5E37	142	AC1 48Y3	59
AA1FCET48	44	AA1RSXDN	109	AA3EPS41	39	AC1 64E1	58
AA1FCET64	44	AA1RSXUP	109	AA3EPS49	39	AC1 64L2	58
AA1FMET30	44	AA1RTC	40	AA3EPS61	39	AC1 64T3	58
AA1FMET39	44	AA1RW36	136	AA3EPS64	39	AC1 64V2	59
AA1FMET42	44	AA1RW3C	137	AB1 AC24	96	AC1 64X4	58
AA1FMET48	44	AA1RW42	136	AB1 CL24L	97	AC1 64Y3	59
AA1FMET56	44	AA1RW48	136	AB1 CL24R	97	AC1 FS18	146
AA1FMET64	44	AA1RW4C	137	AB1 CL30L	97	AC1 FS24	146
AA1FMPS30	43	AA1RW60	136	AB1 CL30R	97	AC1 FS30	146
AA1FMPS39	43	AA1RW72	136	AB1 CLF24L	97	ACE1BD6648D(L/R)	91
AA1FMPS42	43	AA1RW84	136	AB1 CLF24R	97	ACE1BD6648S(L/R)	91
AA1FMPS48	43	AA1RWC	137	AB1 CLF30L	97	ACE1BD7248D(L/R)	91
AA1FMPS56	43	AA1RWC35	136	AB1 CLF30R	97	ACE1BD7248S(L/R)	91
AA1FMPS64	43	AA1RWC36	136	AB1 CS	111	ACE1BD7848D(L/R)	91
AA1FUPS39	43	AA1RWC4242	136	AB1 F24	164	ACE1BD7848S(L/R)	91

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
ACE1BD8448D(L/R)	91	ACE1R8424N	89	AD C46 DB	122	AD C64 LF	113
ACE1BD8448S(L/R)	91	ACE1R8430N	89	AD C46 DF	114	AD C64 LH	117
ACE1H4818	94	ACE1R9024N	89	AD C46 DH	118	AD C64 SA	125
ACE1H4818P	94	ACE1R9030N	89	AD C46 RA	126	AD C64 SB	121
ACE1H6024	94	ACE1R9624N	89	AD C46 RB	122	AD C64 SF	113
ACE1H6024P	94	ACE1R9630N	89	AD C46 RF	114	AD C64 SH	117
ACE1L3636SSN	90	ACE1W362430N	95	AD C46 RH	118	AD C74 DA	125
ACE1L4242DSN	90	ACE1W363024N	95	AD C46 SA	126	AD C74 DB	121
ACE1L4242SDN	90	ACE1W422430N	95	AD C46 SB	122	AD C74 DF	113
ACE1L4242SSN	90	ACE1W423024N	95	AD C46 SF	114	AD C74 DH	117
ACE1L4260SSN	92	ACE1W482430N	95	AD C46 SH	118	AD C74 LA	125
ACE1L4266SSN	92	ACE1W483024N	95	AD C47 DA	126	AD C74 LB	121
ACE1L4272SSN	92	ACE1W722430N	95	AD C47 DB	122	AD C74 LF	113
ACE1L4278SSN	92	ACE1W723024N	95	AD C47 DF	114	AD C74 LH	117
ACE1L4848DDN	90	AD C35 SA	126	AD C47 DH	118	AD C74 SA	125
ACE1L4848DSN	90	AD C35 SB	122	AD C47 RA	126	AD C74 SB	121
ACE1L4848SDN	90	AD C35 SF	114	AD C47 RB	122	AD C74 SF	113
ACE1L4848SSN	90	AD C35 SH	118	AD C47 RF	114	AD C74 SH	117
ACE1L4860DSN	92	AD C36 SA	126	AD C47 RH	118	AD S36 DA	128
ACE1L4860SDN	92	AD C36 SB	122	AD C47 SA	126	AD S36 DB	124
ACE1L4860SSN	92	AD C36 SF	114	AD C47 SB	122	AD S36 DF	116
ACE1L4866DSN	92	AD C36 SH	118	AD C47 SF	114	AD S36 DH	120
ACE1L4866SSN	92	AD C4242 DB	123	AD C47 SH	118	AD S36 SA	128
ACE1L4872DSN	92	AD C4242 DF	115	AD C53 SA	125	AD S36 SB	124
ACE1L4872SDN	92	AD C4242 LA	127	AD C53 SB	121	AD S36 SF	116
ACE1L4872SSN	92	AD C4242 LB	123	AD C53 SF	113	AD S36 SH	120
ACE1L4878SSN	92	AD C4242 LF	115	AD C53 SH	117	AD S42 DA	128
ACE1L4878SSN	92	AD C4242 LH	119	AD C54 DA	125	AD S42 DB	124
ACE1L4884SSN	92	AD C4242 RA	127	AD C54 DB	121	AD S42 DF	116
ACE1L6042SSN	92	AD C4242 RB	123	AD C54 DF	113	AD S42 DH	120
ACE1L6048DSN	92	AD C4242 RF	115	AD C54 DH	117	AD S42 SA	128
ACE1L6048SDN	92	AD C4242 RH	119	AD C54 LA	125	AD S42 SB	124
ACE1L6048SSN	92	AD C4242 SA	127	AD C54 LB	121	AD S42 SF	116
ACE1L6642SSN	92	AD C4242 SB	123	AD C54 LF	113	AD S42 SH	120
ACE1L6648DSN	92	AD C4242 SF	115	AD C54 LH	117	AD S48 DA	128
ACE1L6648SDN	92	AD C4242 SH	119	AD C54 SA	125	AD S48 DB	124
ACE1L6648SSN	92	AD C44 DA	127	AD C54 SB	121	AD S48 DF	116
ACE1L7242SSN	92	AD C44 DB	123	AD C54 SF	113	AD S48 DH	120
ACE1L7248DSN	92	AD C44 DF	115	AD C54 SH	117	AD S48 SA	128
ACE1L7248SDN	92	AD C44 DH	119	AD C55 DA	127	AD S48 SB	124
ACE1L7248SSN	92	AD C44 LA	127	AD C55 DB	123	AD S48 SF	116
ACE1L7842SSN	93	AD C44 LB	123	AD C55 DF	115	AD S48 SH	120
ACE1L7848SSN	93	AD C44 LF	115	AD C55 DH	119	AD S60 DA	128
ACE1L8448SSN	93	AD C44 LH	119	AD C55 LA	127	AD S60 DB	124
ACE1R1212G	94	AD C44 RA	127	AD C55 LB	123	AD S60 DF	116
ACE1R2424N	89	AD C44 RB	123	AD C55 LF	115	AD S60 DH	120
ACE1R2430N	89	AD C44 RF	115	AD C55 LH	119	AD S60 SA	128
ACE1R3024N	89	AD C44 RH	119	AD C55 RA	127	AD S60 SB	124
ACE1R3030N	89	AD C44 SA	127	AD C55 RB	123	AD S60 SF	116
ACE1R3624N	89	AD C44 SB	123	AD C55 RF	115	AD S60 SH	120
ACE1R3630N	89	AD C44 SF	115	AD C55 RH	119	AD S72 DA	128
ACE1R4224N	89	AD C44 SH	119	AD C55 SA	127	AD S72 DB	124
ACE1R4230N	89	AD C45 DA	126	AD C55 SB	123	AD S72 DF	116
ACE1R4824N	89	AD C45 DB	122	AD C55 SF	115	AD S72 DH	120
ACE1R4830N	89	AD C45 DF	114	AD C55 SH	119	AD S72 SA	128
ACE1R5424N	89	AD C45 DH	118	AD C63 SA	125	AD S72 SB	124
ACE1R5430N	89	AD C45 RA	126	AD C63 SB	121	AD S72 SF	116
ACE1R6024N	89	AD C45 RB	122	AD C63 SF	113	AD S72 SH	120
ACE1R6030N	89	AD C45 RF	114	AD C63 SH	117	AD S84 SA	128
ACE1R6624N	89	AD C45 RH	118	AD C64 DA	125	AD S84 SB	124
ACE1R6630N	89	AD C45 SA	126	AD C64 DB	121	AD S84 SF	116
ACE1R7224N	89	AD C45 SB	122	AD C64 DF	113	AD S84 SH	120
ACE1R7230N	89	AD C45 SF	114	AD C64 DH	117	AF 3924 TCP	60
ACE1R7824N	89	AD C45 SH	118	AD C64 LA	125	AF 3936 TCP	60
ACE1R7830N	89	AD C46 DA	126	AD C64 LB	121	AF 3948 TCP	60

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AF 3960 TCP	60	API 4830M	55, 56	APC 0960 F	23	APFA1 6460	14
AF 3972 TCP	60	API 4836	53	APC 0960 M	21	APFA1 6472	14
AF 4824 TCP	60	API 4836 N	54	APC 0960 P	21	APR 48	16
AF 4836 TCP	60	API 4836M	55, 56	APC 0960 PT	21	APR 480	16
AF 4848 AM	61	API 4842	53	APC 0960 S	20	APR 60	16
AF 4848 TCM	61	API 4842 N	54	APC 0972 A	24	APR 600	16
AF 4848 TCP	60	API 4842M	55, 56	APC 0972 C	20	APR 72	16
AF 4860 AM	61	API 4848	53	APC 0972 F	23	APR 720	16
AF 4860 TCM	61	API 4848 N	54	APC 0972 M	21	APT	28, 39
AF 4860 TCP	60	API 4848M	55, 56	APC 0972 P	21	APT 48	16
AF 4872 TCM	61	API 4860	53	APC 0972 PT	22	APT 60	16
AF 4872 TCP	60	API 4860 N	54	APC 0972 S	20	APT 72	16
AF 6424 TCP	60	API 6418	53	APC 1636 A	24	APT C24	16
AF 6436 TCP	60	API 6418 A	54	APC 1636 F	23	APT C36	16
AF 6448 AM	61	API 6424	53	APC 1648 A	24	APT C48	16
AF 6448 TCM	61	API 6424 A	54	APC 1648 F	23	APT C60	16
AF 6448 TCP	60	API 6424M	55, 56	APC 1648 M	21	APT C72	16
AF 6460 AM	61	API 6430	53	APC 1648 P	22	APT1 C24	16
AF 6460 TCM	61	API 6430 A	54	APC 1648 PT	22	APT1 C36	16
AF 6460 TCP	60	API 6430M	55, 56	APC 1660 A	24	APT1 C48	16
AFWB	60	API 6436	53	APC 1660 F	23	APT1 C60	16
AL1 A3918	112	API 6436 A	54	APC 1660 M	21	APT1 C72	16
AL1 A3924	112	API 6436M	55, 56	APC 1660 P	22	APTA 48	16
AL1 A4818	112	API 6442	53	APC 1660 PT	22	APTA 60	16
AL1 A4824	112	API 6442 A	54	APC 1672 A	24	APTA 72	16
AL1 A6418	112	API 6442M	55, 56	APC 1672 F	23	APTA CC	28
AL1 A6424	112	API 6448	53	APC 1672 M	21	APTA CC1	28
AL1 AA	112	API 6448 A	54	APC 1672 P	22	APX CIP4	51
AL1 C39	112	API 6448M	55, 56	APC 1672 PT	22	APX CIP6	51
AL1 C48	112	API 6460	53	APC 1836 A	24	APX CIP8	51
AL1 C64	112	API 6460 A	54	APC 1848 A	24	AR OF	19, 52, 146, 150
AMB CP12-AMP	52	API LF	57	APC 1860 A	24	AR1 CB	139, 141, 164
AMB CP24 LUC	52	APA 39	32	APC 1872 A	24	AR1 DA	45, 48, 139, 141
AMC B10	52	APA 48	32	APC 2736 A	25	AR1 DB	45, 48, 139, 141
AMC FP2 (L or N)	52	APA 64	32	APC 2748 A	25	AR1 DC	48, 141
AMC FP3 (L or N)	52	APC 0912 A	24	APC 2760 A	25	AR1 DEHI	139
AMC O3	52	APC 0912 C	20	APC 2772 A	25	AR1 DEM2	138
AMC O5E	52	APC 0912 CX	20	APC AZ48	17	AR1 DEM4	138
AMC O6	52	APC 0912 F	23	APC AZ48 F	18	AR1 DEPI	139
AMC OF500	52	APC 0912 P	21	APC AZ60	17	AR1 DTHI	141
AMC OF625	52	APC 0912 PT	21	APC AZ60 F	18	AR1 DTM2	140
AMC PDC 5E4N	52	APC 0912 S	20	APC AZ72	17	AR1 DTM4	140
AMC5 CP12	52	APC 0924 A	24	APC AZ72 F	18	AR1 DTPI	141
AMC5 OC20(A or B)	52	APC 0924 C	20	APC HOC	19	AR1 DX	45, 48, 139, 141
AMC5 OC30(A or B)	52	APC 0924 F	23	APC OC	19	AR1 DY	45, 48, 139, 141
AMC5 OC40(A or B)	52	APC 0924 M	21	APC OCF	19, 150	AR1 DZ	48, 141
AMC5 OC50(A or B)	52	APC 0924 P	21	APF 1848	15	AR1 E2	47
API 3918 N	54	APC 0924 PT	21	APF 1860	15	AR1 E3	47
API 3924	53	APC 0924 S	20	APF 1872	15	AR1 EJ1	46, 138
API 3924 N	54	APC 0936 A	24	APF1 3948	14	AR1 EJ10	46, 138
API 3930 N	54	APC 0936 C	20	APF1 3960	14	AR1 EJ12	46
API 3936	53	APC 0936 F	23	APF1 3972	14	AR1 EJ2	46, 138
API 3936 N	54	APC 0936 M	21	APF1 4848	14	AR1 EJ3	46, 138
API 3942 N	54	APC 0936 P	21	APF1 4860	14	AR1 EJ4	46, 138
API 3948	53	APC 0936 PT	21	APF1 4872	14	AR1 EJ5	46, 138
API 3948 N	54	APC 0936 S	20	APF1 6448	14	AR1 EJ6	46, 138
API 3960	53	APC 0948 A	24	APF1 6460	14	AR1 EJ7	138
API 3960 N	54	APC 0948 C	20	APF1 6472	14	AR1 EJ8	46, 138
API 4818	53	APC 0948 F	23	APFA1 3948	14	AR1 EOM	45
API 4818 N	54	APC 0948 M	21	APFA1 3960	14	AR1 EPC1	47
API 4824	53	APC 0948 P	21	APFA1 3972	14	AR1 EPC2	47
API 4824 N	54	APC 0948 PT	21	APFA1 4848	14	AR1 EPH1	46
API 4824M	55, 56	APC 0948 S	20	APFA1 4860	14	AR1 EPH2	46
API 4830	53	APC 0960 A	24	APFA1 4872	14	AR1 EPHF	33
API 4830 N	54	APC 0960 C	20	APFA1 6448	14	AR1 EPI2	46

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AR1 EPI5	46	AS1 DPDF M	98	AU 2848 A	64	AUP D624	154
AR1 EPIC	46	AS1 DPDFG	99	AU 2848 TC	62	AUP M72DC4	151
AR1 EPM	150	AS1 PT	100	AU 2860 A	64	AUP M72DF4	151
AR1 ET1	46	AS1 SDF M	98	AU 2860 TC	62	AUP MR36	165
AR1 ET3	46	AS1 SDFO	98	AU 2872 TC	62	AUP MR48	165
AR1 ET5	46	AS1 SFF M	98	AU1 CL12	67	AUP MR60	165
AR1 ET8	46	AS1 SPAD	101, 102	AU1 CL21	67	AUP MR72	165
AR1 HCC H10	51	AS1 SPDF M	98	AU1 CL28	67	AUP O664	154
AR1 HOB	19	AS1 SPDFG	99	AU1 CS	67	AUP PDU	164
AR1 HOB2	19	AS1-SFF G	99	AU1 CT12	67	AUP R424	154
AR1 OHS	139, 141	AT1 D50A	149	AU1 CT21	67	AUP S48D4	153
AR1 PCC 100	51	AT1 D50F	149	AU1 CT28	67	AUP S48S2	153
AR1 RCM 10	51	AT1 D62A	149	AU1 PC12	72	AUP S48S4	153
AR1 T2	49	AT1 D62F	149	AU1 PC21	72	AUP S60D4	153
AR1 T3	49	AT1 E24LA	148	AU1 PC28	72	AUP S72D4	153
AR1 TJ1	49, 140	AT1 E24LF	148	AU1 X112	67	AUP S72E4	153
AR1 TJ10	49, 140	AT1 E24RA	148	AU1 X121	67	AUP T363	154
AR1 TJ12	49	AT1 E24RF	148	AU1 X128	67	AUP T48A LCT	170
AR1 TJ2	49, 140	AT1 P36A	147	AU1 X312	67	AUP T48A LCT	170
AR1 TJ3	49, 140	AT1 P36F	147	AU1 X321	67	AUP T48A RCT	170
AR1 TJ4	49, 140	AT1 R42A	149	AU1 X328	67	AUP T48A RGT	170
AR1 TJ5	49, 140	AT1 R42F	149	AUA1 0824 G	65	AUP T48E LCT	170
AR1 TJ6	49, 140	AT1 R48A	149	AUA1 0836 G	65	AUP T48E LCT	170
AR1 TJ7	140	AT1 R48F	149	AUA1 0848 G	65	AUP T48E RCT	170
AR1 TJ8	49, 140	AT1 TA	147	AUA1 0860 G	65	AUP T48E RGT	170
AR1 TOM	48	AT1 TL	147	AUA1 0872 G	65	AUP V48S5	152
AR1 TPC1	49	AT1 W24A	147	AUA1 1224 G	65	AUP VP3	169
AR1 TPC2	49	AT1 W24F	147	AUA1 1236 G	65	AUP W60D4	154
AR1 TPH1	49	AT1 W30A	148	AUA1 1248 G	65	AUP Y72DCL4	151
AR1 TPH2	49	AT1 W30F	148	AUA1 1260 G	65	AUP Y72DCR4	151
AR1 TPHF	33	AT1 W50A	149	AUA1 1272 G	65	AUP Y72DFL4	151
AR1 TPI2	49	AT1 W50F	149	AUA1 1524 G	65	AUP Y72DFR4	151
AR1 TPI5	49	AU 1212 T 4	63	AUA1 1536 G	65	AUPM C3660S5	160
AR1 TPIC	49	AU 1224 A	64	AUA1 1548 G	65	AUPM C3672S5	160
AR1 TPM	150	AU 1224 H	62	AUA1 1560 G	65	AUPM C4242D5	157
AR1 TT1	49	AU 1224 TC	62	AUA1 1572 G	65	AUPM C4242S5	157
AR1 TT3	49	AU 1236 A	64	AUA1224	66	AUPM C4260L5	161
AR1 TT5	49	AU 1236 H	62	AUA1236	66	AUPM C4260R5	160
AR1 TT8	49	AU 1236 TC	62	AUA1248	66	AUPM C4260S5	160
AR1 VCM	33	AU 1248 A	64	AUA1260	66	AUPM C4272L5	161
AR1-ELS-B	45, 48	AU 1248 H	62	AUA1272	66	AUPM C4272R5	160
ARE1 DA	50	AU 1248 TC	62	AUA2124	66	AUPM C4272S5	160
ARE1 DB	50	AU 1260 A	64	AUA2136	66	AUPM C4848D5	157
ARE1 DC	50	AU 1260 H	62	AUA2148	66	AUPM C4848S5	157
ARE1 DX	50	AU 1260 TC	62	AUA2160	66	AUPM C4860D5	160
ARE1 DX (O or T)	50	AU 1272 H	62	AUA2172	66	AUPM C4860L5	161
ARE1 DY	50	AU 1272 TC	62	AUA2824	66	AUPM C4860R5	160
ARE1 DY (O or T)	50	AU 2124 A	64	AUA2836	66	AUPM C4860S5	160
ARE1 DZ	50	AU 2124 H	62	AUA2848	66	AUPM C4872D5	160
ARE1 DZ (O or T)	50	AU 2124 TC	62	AUA2860	66	AUPM C4872L5	161
ARE1 EP1	50	AU 2136 A	64	AUA2872	66	AUPM C4872R5	160
ARE1 ET1	50	AU 2136 H	62	AUP B3624M	165	AUPM C4872S5	160
ARE1 ET3	50	AU 2136 TC	62	AUP B3624RC	165	AUPM C4884D5	160
ARE1 ET5	50	AU 2148 A	64	AUP B4824M	165	AUPM C4884L5	161
ARE1 TP1	50	AU 2148 H	62	AUP B4824RC	165	AUPM C4884R5	160
ARE1 TT1	50	AU 2148 TC	62	AUP B6024M	165	AUPM C4884S5	160
ARE1 TT3	50	AU 2160 A	64	AUP B6024RC	165	AUPM C6036S5	158
ARE1 TT5	50	AU 2160 H	62	AUP B7224M	165	AUPM C6042L5	158
AS1 BKH	100	AU 2160 TC	62	AUP B7224RC	165	AUPM C6042R5	159
AS1 BKL	100	AU 2172 H	62	AUP C	169	AUPM C6042S5	158
AS1 DDF M	98	AU 2172 TC	62	AUP C D	169	AUPM C6048D5	158
AS1 DDFO	98	AU 2824 A	64	AUP C DL	169	AUPM C6048L5	158
AS1 DFF G	99	AU 2824 TC	62	AUP C L	169	AUPM C6048R5	159
AS1 DFF M	98	AU 2836 A	64	AUP C4872S5	152	AUPM C6048S5	158
AS1 DPAD	101, 102	AU 2836 TC	62	AUP C7248S5	152	AUPM C6060D5	157

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AUPM C6060S5	157	AW1 C4848 S	78	AW1 S3024	77	AWM2 C7242 L	84
AUPM C7236S5	158	AW1 C4860 D	80	AW1 S3624	77	AWM2 C7242 R	84
AUPM C7242L5	158	AW1 C4860 L	80	AW1 S3630	77	AWM2 C7242 S	84
AUPM C7242R5	159	AW1 C4860 R	80	AW1 S4224	77	AWM2 C7248 D	84
AUPM C7242S5	158	AW1 C4860 S	80	AW1 S4824	77	AWM2 C7248 L	84
AUPM C7248D5	158	AW1 C4872 D	80	AW1 S4830	77	AWM2 C7248 R	84
AUPM C7248L5	158	AW1 C4872 L	80	AW1 S6024	77	AWM2 C7248 S	84
AUPM C7248R5	159	AW1 C4872 R	80	AW1 S6030	77	AWM2 C8448 D	84
AUPM C7248S5	158	AW1 C4872 S	80	AW1 S6624	77	AWM2 C8448 L	84
AUPM C8448D5	158	AW1 C4884 D	80	AW1 S7224	77	AWM2 C8448 R	84
AUPM C8448L5	158	AW1 C4884 L	80	AW1 S7230	77	AWM2 C8448 S	84
AUPM C8448R5	159	AW1 C4884 R	80	AW1 S8424	77	AWM2 F2424	83
AUPM C8448S5	158	AW1 C4884 S	80	AW1 S8430	77	AWM2 F3024	83
AUPM D594	162	AW1 C6036 S	79	AWF1CR24L	94	AWM2 F3030	83
AUPM D604	162	AW1 C6042 L	79	AWF1CR24N	94	AWM2 F3624	83
AUPM P4875S5	162	AW1 C6042 R	79	AWF1CR24R	94	AWM2 F3630	83
AUPM P7548S5	162	AW1 C6042 S	79	AWM1 S36	88	AWM2 F4224	83
AUPM S30D4	155	AW1 C6048 D	79	AWM1 S42	88	AWM2 F4230	83
AUPM S30S4	155	AW1 C6048 L	79	AWM1 S48	88	AWM2 F4824	83
AUPM S36D4	155	AW1 C6048 R	79	AWM1 S60	88	AWM2 F4830	83
AUPM S36S2	156	AW1 C6048 S	79	AWM1 S66	88	AWM2 F5424	83
AUPM S36S4	155	AW1 C6060 D	78	AWM1 S72	88	AWM2 F5430	83
AUPM S42D4	155	AW1 C6060 L	78	AWM1 S78	88	AWM2 F6024	83
AUPM S42S2	156	AW1 C6060 R	78	AWM1 S84	88	AWM2 F6030	83
AUPM S42S4	155	AW1 C6060 S	78	AWM2 C3660 S	85	AWM2 F6624	83
AUPM S48D4	155	AW1 C7236 S	79	AWM2 C3672 S	85	AWM2 F6630	83
AUPM S48S2	156	AW1 C7242 L	79	AWM2 C4242 D	86	AWM2 F7224	83
AUPM S48S4	155	AW1 C7242 R	79	AWM2 C4242 L	86	AWM2 F7230	83
AUPM S54D4	155	AW1 C7242 S	79	AWM2 C4242 R	86	AWM2 F7824	83
AUPM S54S4	155	AW1 C7248 D	79	AWM2 C4242 S	86	AWM2 F7830	83
AUPM S60D4	155	AW1 C7248 L	79	AWM2 C4260 L	85	AWM2 F8424	83
AUPM S60S2	156	AW1 C7248 R	79	AWM2 C4260 R	85	AWM2 F9024	83
AUPM S60S4	155	AW1 C7248 S	79	AWM2 C4260 S	85	AWM2 F9030	83
AUPM S66D4	155	AW1 C8436 S	79	AWM2 C4272 L	85	AWM2 F9624	83
AUPM S66S4	155	AW1 C8442 L	79	AWM2 C4272 R	85	AWM2 F9630	83
AUPM S72D4	155	AW1 C8442 R	79	AWM2 C4272 S	85	AWM2 P4875 S	87
AUPM S72S4	155	AW1 C8442 S	79	AWM2 C4848 D	86	AWM2 P4887 S	87
AUPM S84D4	155	AW1 C8448 D	79	AWM2 C4848 L	86	AWM2 P7548 S	87
AUPM S84S4	155	AW1 C8448 L	79	AWM2 C4848 R	86	AWM2 P8748 S	87
AUPM SCV	163	AW1 C8448 R	79	AWM2 C4848 S	86	AX1 AK1	31
AUPM SGV	163	AW1 C8448 S	79	AWM2 C4860 D	85	AX1 AK3	31
AUPTS	170	AW1 CS3612	111	AWM2 C4860 L	85	AX1 E40	39
AW1 A60L	82	AW1 CS4812	111	AWM2 C4860 R	85	AX1 E48	39
AW1 A60R	82	AW1 CS6012	111	AWM2 C4860 S	85	AX1 E53	39
AW1 A72L	82	AW1 CS7212	111	AWM2 C4872 D	85	AX1 E60	39
AW1 A72R	82	AW1 F2424	77	AWM2 C4872 L	85	AX1 E65	39
AW1 C3660 S	80	AW1 F3024	77	AWM2 C4872 R	85	AX1 EET39(T,R,L)	39
AW1 C3672 S	80	AW1 F3624	77	AWM2 C4872 S	85	AX1 EET48(T,R,L)	39
AW1 C3684 S	80	AW1 F3630	77	AWM2 C4884 D	85	AX1 EET64(T,R,L)	39
AW1 C4242 D	78	AW1 F4224	77	AWM2 C4884 L	85	AX1 ECF11	39
AW1 C4242 L	78	AW1 F4824	77	AWM2 C4884 R	85	AX1 ECF16	39
AW1 C4242 R	78	AW1 F4830	77	AWM2 C4884 S	85	AX1 ECF24	39
AW1 C4242 S	78	AW1 F6024	77	AWM2 C6036 S	84	AX1 ECF4	39
AW1 C4260 L	80	AW1 F6030	77	AWM2 C6042 L	84	AX1 F18	30
AW1 C4260 R	80	AW1 F6624	77	AWM2 C6042 R	84	AX1 F39	28
AW1 C4260 S	80	AW1 F7224	77	AWM2 C6042 S	84	AX1 F48	28
AW1 C4272 L	80	AW1 F7230	77	AWM2 C6048 D	84	AX1 F64	28
AW1 C4272 R	80	AW1 F8424	77	AWM2 C6048 L	84	AX1 FF	15
AW1 C4272 S	80	AW1 F8430	77	AWM2 C6048 R	84	AX1 FHLS4818	31
AW1 C4284 L	80	AW1 P4875 S	81	AWM2 C6048 S	84	AX1 FWS 39	31
AW1 C4284 R	80	AW1 P4887 S	81	AWM2 C6060 D	86	AX1 FWS 48	31
AW1 C4284 S	80	AW1 P7548 S	81	AWM2 C6060 L	86	AX1 FWS 64	31
AW1 C4848 D	78	AW1 P8748 S	81	AWM2 C6060 R	86	AX1 HLS4839	27
AW1 C4848 L	78	AW1 R7236	82	AWM2 C6060 S	86	AX1 HLS6439	27
AW1 C4848 R	78	AW1 S2424	77	AWM2 C7236 S	84	AX1 HLS6448	27



<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AX1 L18	29	AX1SEC3939	34	AY1 2148C	68	AY1 SX316	76
AX1 L39	26	AX1SEC4239	35	AY1 2148C A	70	AY1 X112	76
AX1 L48	26	AX1SEC4339 C	34	AY1 2160C	68	AY1 X121	76
AX1 L64	26	AX1SEC4839	35	AY1 2160C A	70	AY1 X128	76
AX1 LEG	15	AX1SEC4848	34	AY1 2518M	68	AY1 X312	76
AX1 M3939	38	AX1SEC5248 C	34	AY1 2518M A	70	AY1 X321	76
AX1 M4239	38	AX1SEC5639	35	AY1 2524M	68	AY1 X328	76
AX1 M4839	38	AX1SEC5648	35	AY1 2524M A	70	AZ1 0936H	143
AX1 M4848	38	AX1SEC6439	35	AY1 2530M	68	AZ1 0942H	143
AX1 M5639	38	AX1SEC6448	35	AY1 2530M A	70	AZ1 0948H	143
AX1 M5648	38	AX1SEC6464	34	AY1 2536M	68	AZ1 0960H	143
AX1 M6439	38	AX1SEC6864 C	34	AY1 2536M A	70	AZ1 0972H	143
AX1 M6448	38	AX1SEC8048	35	AY1 2542M	68	AZ1 1836F	144
AX1 M6464	38	AX1SEC8064	35	AY1 2542M A	70	AZ1 1842F	144
AX1 M8039	38	AX1SECBT	34, 35	AY1 2548M	68	AZ1 1848F	144
AX1 M8048	38	AX2 C3939	38	AY1 2548M A	70	AZ1 1860F	144
AX1 M8064	38	AX2 C4839	38	AY1 2560M	68	AZ1 1872F	144
AX1 R34239	40	AX2 C4848	38	AY1 2560M A	70	AZ1 2736F	144
AX1 R34939	40	AX2 C6439	38	AY1 2824C	68	AZ1 2742F	144
AX1 R34948	40	AX2 C6448	38	AY1 2836C	68	AZ1 2748F	144
AX1 R36439	40	AX2 C6464	38	AY1 2848C	68	AZ1 2760F	144
AX1 R36448	40	AX3E41	39	AY1 2860C	68	AZ1 2772F	144
AX1 R36464	40	AX3E49	39	AY1 AXST16	76	AZ1 CL18	145
AX1 R37939	40	AX3E61	39	AY1 AXT16	76	AZ1 CL27	145
AX1 R37948	40	AX3E64	39	AY1 AXT25	76	AZ1 CL36	145
AX1 R37964	40	AY1 1224C	68	AY1 AXT32	76	AZ1 CS	145
AX1 S	27	AY1 1224C A	70	AY1 CE	73	AZ1 U0936T	145
AX1 STC39 3	27	AY1 1236C	68	AY1 CL12	75	AZ1 U0942T	145
AX1 STC39 L3	27	AY1 1236C A	70	AY1 CL21	75	AZ1 U0948T	145
AX1 STC48 3	27	AY1 1248C	68	AY1 CL28	75	AZ1 U0960T	145
AX1 STC48 L3	27	AY1 1248C A	70	AY1 CMK	75	BB-21-3PD-CE8	171
AX1 STC64 3	27	AY1 1260C	68	AY1 CS	73	BB-21-3PD-SN8	171
AX1 STC64 L3	27	AY1 1260C A	70	AY1 CT12	75	BB-21-3PL-CE8	171
AX1 SWS39	27	AY1 1618M	68	AY1 CT21	75	BB-21-3PL-SN8	171
AX1 SWS48	27	AY1 1618M A	70	AY1 CT28	75	BB-21-NOP-CE8	171
AX1 SWS64	27	AY1 1618S	69	AY1 CX12	76	BB-21-NOP-SN8	171
AX1 T18	29	AY1 1618S A	71	AY1 CX21	76	BB-23-3PD-CE8	171
AX1 T39	26	AY1 1624M	68	AY1 CX28	76	BB-23-3PD-SN8	171
AX1 T48	26	AY1 1624M A	70	AY1 HLA	75	BB-23-3PL-CE8	171
AX1 T64	26	AY1 1624S	69	AY1 LL16	73	BB-23-3PL-SN8	171
AX1 V18	29	AY1 1624S A	71	AY1 LL25	73	BB-23-NOP-CE8	171
AX1 V39	26	AY1 1630M	68	AY1 LL32	73	BB-23-NOP-SN8	171
AX1 V48	26	AY1 1630M A	70	AY1 LP16	74	BB-29-3PL-CE8	171
AX1 V64	26	AY1 1630S	69	AY1 LP25	74	BB-29-3PL-SN8	171
AX1 X18	29	AY1 1630S A	71	AY1 LP32	74	BB-29-NOP-CE8	171
AX1 X39	26	AY1 1636M	68	AY1 LT16	73	BB-29-NOP-SN8	171
AX1 X48	26	AY1 1636M A	70	AY1 LT25	73	BB-SH	171
AX1 X64	26	AY1 1636S	69	AY1 LT32	73	MC1-39S1	58
AX1 Y18	29	AY1 1636S A	71	AY1 LX16	74	MC1-48S1	58
AX1 Y39	26	AY1 1642M	68	AY1 LX25	74	MC1-64S1	58
AX1 Y48	26	AY1 1642M A	70	AY1 LX32	74	MD6-BD	100
AX1 Y64	26	AY1 1642S	69	AY1 MMK	75	MD6-FS	100
AX1LES E00	36	AY1 1642S A	71	AY1 PC16	72	MM2-CG	57, 164
AX1LES E02	36	AY1 1648M	68	AY1 PC25	72	MR3 ATT2	52
AX1LES30	36	AY1 1648M A	70	AY1 PC32	72	MR3 ATT3	52
AX1LES39	36	AY1 1648S	69	AY1 SCL16	75	MR3 PDCX	52
AX1LES48	36	AY1 1648S A	71	AY1 SCT16	75	MZ1-B3015	166
AX1LES64	36	AY1 1660M	68	AY1 SCX16	76	MZ1-B3019	166
AX1MES30	36	AY1 1660M A	70	AY1 SL16	73	MZ1-B3022	166
AX1MES39	36	AY1 1660S	69	AY1 SMK	75	MZ1-B3615	166
AX1MES42	36	AY1 1660S A	71	AY1 SP16	74	MZ1-B3619	166
AX1MES48	36	AY1 2124C	68	AY1 SPC16	72	MZ1-B3622	166
AX1MES56	36	AY1 2124C A	70	AY1 ST16	73	MZ1-B4215	166
AX1MES64	36	AY1 2136C	68	AY1 SX116	76	MZ1-B4219	166
AX1MES80	36	AY1 2136C A	70	AY1 SX16	74	MZ1-B4222	166

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
MZ1-B4815	166	RO1-HP9	106, 107
MZ1-B4819	166	RO1-PULL	108
MZ1-B4822	166	RO3-N24	105
MZ1-B5415	166	RO3-N30	105
MZ1-B5419	166	RO3-N36	105
MZ1-B5422	166	RO3-N42	105
MZ1-B6015	166	RO3-N48	105
MZ1-B6019	166	RO3-N60	105
MZ1-B6022	166	RO3-N66	105
MZ1-B6615	166	RO3-N72	105
MZ1-B6619	166	RO3-OM30	106
MZ1-B6622	166	RO3-OM36	106
MZ1-B7215	166	RO3-OM42	106
MZ1-B7219	166	RO3-OM48	106
MZ1-B7222	166	RO3-OM60	106
MZ1-B7815	166	RO3-OM72	106
MZ1-B7819	166	RO3-ON30	106
MZ1-B7822	166	RO3-ON36	106
MZ1-E2415-W/U	168	RO3-ON42	106
MZ1-E2419-W/U	168	RO3-ON48	106
MZ1-E2422-W/U	168	RO3-ON60	106
MZ1-E3015-W/U	168	RO3-ON72	106
MZ1-E3019-W/U	168	RO3-RD30	106
MZ1-E3022-W/U	168	RO3-RD36	106
MZ1-S2415-W/U	168	RO3-RD42	106
MZ1-S2419-W/U	168	RO3-RD48	106
MZ1-S2422-W/U	168	RO3-RD60	106
MZ1-S3015-W/U	168	RO3-RD72	106
MZ1-S3019-W/U	168	RO3-VP	106
MZ1-S3022-W/U	168	RS1 MPB	109
MZ1-V3615	167	RS1-M24	107
MZ1-V3619	167	RS1-M30	107
MZ1-V3622	167	RS1-M36	107
MZ1-V4215	167	RS1-M42	107
MZ1-V4219	167	RS1-M48	107
MZ1-V4222	167	RS1-M60	107
MZ1-V4815	167	RS1-N24	107
MZ1-V4819	167	RS1-N30	107
MZ1-V4822	167	RS1-N36	107
MZ1-V6015	167	RS1-N42	107
MZ1-V6019	167	RS1-N48	107
MZ1-V6022	167	RS1-N60	107
MZ1-V7215	167	RS1-VP	107
MZ1-V7219	167	RTAT5E19	110
MZ1-V7222	167	RTAT5E25	110
R3BOP0F4207	41	RTAT5E37	110
R3BOP0F4907	41	RTAT5E49	110
R3BOP0F6407	41	RTAT5E61	110
R3BOP0F7907	41		
R3BOP0H4207	41		
R3BOP0H4907	41		
R3BOP0H6407	41		
R3BOP0H7907	41		
R3BOT0F4207	41		
R3BOT0F4907	41		
R3BOT0F6407	41		
R3BOT0F7907	41		
R3BOT0H4207	41		
R3BOT0H4907	41		
R3BOT0H6407	41		
R3BOT0H7907	41		
RO1-GB	108		
RO1-HP12	106, 107		
RO1-HP15	106, 107		
RO1-HP6	106, 107		

# Selling Policy

---

	<p>This Selling Policy supercedes all previous selling policies. Prices, discounts and product offerings are subject to change without notice.</p>
<b>Terms &amp; Conditions of Sales</b>	<p>Sales by Knoll, Inc. or Knoll North America Corp. ("Seller") of Knoll Product Lines (hereinafter "Products") within the United States and Canada are made only on the terms which are contained in this Selling Policy. Seller hereby gives notice of its objection to any different or additional terms and conditions. This sale is expressly conditional upon Purchaser's assent to the terms and conditions set forth below. Additional terms and conditions may apply to KnollStudio and KnollTextiles orders. These terms and conditions may be modified or supplemented only by a written document signed by an authorized representative of Seller. These terms and conditions supercede any prior and/or contemporaneous agreements or correspondence between Purchaser and Seller. Written quotations expire thirty (30) days from the date of issuance and can be withdrawn by written notice anytime during that period. Where Purchaser and Seller have entered into the Knoll Electronic Terms and Conditions, all orders, acknowledgements, invoices and other business communications placed or transmitted in accordance with the Knoll Electronic Terms and Conditions shall be deemed to be in writing and signed and shall be valid for all purposes as if they were originated and maintained in documentary form.</p>
<b>Ordering Information</b>	<p>All orders must be in writing. The product pattern number(s) contained on Seller's order acknowledgement shall be the final expression of the order.</p>
<b>Order Confirmation</b>	<p>A purchase order is not binding on Seller until Purchaser has received Seller's order confirmation or acknowledgment.</p>
<b>Pricing Policies</b>	<p>List prices are subject to change without notice.</p> <p>List prices shall be those prices in effect on the date of receipt of a complete purchase order unless shipment is requested more than ninety (90) days after order entry in which case prices in effect on the date of shipment apply. List prices include specified freight costs. Unless specified in writing by Seller, no other charges are included in Seller's list prices.</p>
<b>Taxes</b>	<p>All sales, use, excise and other taxes applicable to the sale of the Products shall be paid by Purchaser. If Purchaser claims an exemption from any tax, Purchaser shall submit to Seller the appropriate exemption certificates.</p>
<b>Terms of Payment</b>	<p>Payment for one hundred percent (100%) of the net order amount is due within thirty (30) days of the date of invoice, which is issued upon shipment. In case of any discrepancies, such as shortages, and Seller is notified in writing within ten (10) days of receipt of Product, only that portion may be deducted and the balance paid. For orders greater than \$100,000 net, a one-third (1/3) deposit is due at the time of order placement, with the remainder due within thirty (30) days of the date of invoice.</p> <p>KnollStudio orders less than \$2,000 require payment for one hundred percent (100%) of the net order amount (including any applicable sales tax and charges for inside delivery, special packaging, etc.), due at time of order placement. For KnollStudio orders greater than \$2,000, a one-half (50%) deposit is due at time of order placement with the remainder (including any applicable sales tax and charges for inside delivery, special packaging, etc.) due prior to shipment.</p> <p>If, in the judgment of Seller, Purchaser's financial condition does not justify the terms of the payment, Seller may require full or partial payment in advance.</p> <p>Past due accounts shall be charged one and one-half percent (1.5%) per month, or the highest rate permitted by law, whichever is less, and will be added to the outstanding balance. In the event Purchaser defaults on payment, Purchaser shall be liable for all collection costs, including reasonable attorney's fees and costs.</p>
<b>Changes and Cancellation</b>	<p>Purchase orders may not be changed or cancelled, in whole or in part, without prior written consent of Seller. Changes may effect delivery dates. Expenses incurred because of changes shall be charged to Purchaser. In the event of cancellations, Purchaser will be liable for reasonable cancellation charges established by Seller. Orders for special Product, orders including "COM" (hereinafter defined) material and orders pursuant to expedited delivery programs, may not be canceled.</p>
<b>Freight Prepaid</b>	<p>Freight is prepaid and included in the price of all Products, except KnollTextiles, within the 48 contiguous United States and Canada, excluding the Yukon, Northwest Territories, Nunavut and Newfoundland. Packing is tested for rigorous motion and transportation but is not guaranteed to protect furniture from conditions over which the Seller has no control. If special packaging is required for any reason, please consult with your sales representative or dealer. Seller shall select the method of shipment and routing. All shipments shall be tailgate deliveries. Freight for all KnollTextiles orders is prepaid and added to the invoice.</p>
<b>Delivery/Freight Charges</b>	<p>Shipments outside the contiguous 48 United States and Canada shall be shipped F.O.B. Origin.</p> <p>For shipments outside the contiguous United States and Canada, Purchaser is responsible for the cost of freight from point of embarkation, including any handling and transportation charges incidental to loading at the point of departure and unloading at the final destination.</p> <p>Conditions beyond the control of Seller, including weather, available facilities and traffic conditions, may affect exact time of delivery. Seller shall not be responsible for specific carrier delivery date or time unless it has made a specific delivery commitment, in writing.</p> <p>Nonstandard methods of shipment and/or additional services are available upon request. Purchaser will be billed for the differential cost of any special services in excess of standard surface carrier freight costs. Premium charges, at Purchaser's request, will be added for airfreight, exclusive use of vehicle and extra, export or special packaging. Accessorial charges will be added for inside delivery, extra labor, reconsignment and redelivery.</p> <p>Partial shipments may be made and invoiced by Seller.</p>
<b>Claims</b>	<p>All shipments for all Knoll Products within the contiguous United States and Canada are F.O.B. Origin. Risk of loss passes to Purchaser at time of delivery to carrier. Purchaser shall inspect all Products upon receipt and notify Seller within ten (10) working days after receipt of any damage or defects which are, or should be, apparent from an inspection of the Product and its packaging. Failure of Purchaser to make a claim against carrier or notify Seller during the ten (10) working day period shall constitute acceptance of the Products and waiver of any apparent defects, errors or shortages. Seller will agree to repair or replace Product damaged in shipment if Purchaser has notified Seller of freight damage within ten (10) working days after receipt and assigns its rights against the carrier.</p>
<b>Seller's Security Interest</b>	<p>Until Seller receives the full payment for the Product, Seller shall have a security interest in the Product. Purchaser agrees to perform all acts, including but not limited to the execution and filing of documentation, which may be necessary to perfect and assure the security interest of Seller.</p>
<b>Returns</b>	<p>The return of Products without a written authorization by Seller shall not be accepted. To receive authorization for Product return, please call Customer Service. All Products that are returned pursuant to a valid authorization shall be subject to a twenty-five percent (25%) of list restocking charge. Products not currently offered for sale by Seller (including COM) shall not be authorized for return. All returned Products must be unused, in original condition and in the original Seller packing cartons. No refund or credit shall be given for damaged Products.</p>
<b>Held Orders/Storage</b>	<p>If Purchaser requests that an order be held or delayed, prices and terms and conditions in effect at the time of shipment shall apply. If Purchaser requests a delay after the time when Seller can defer production, Purchaser will be invoiced for the Product, payable in accordance with standard terms, when the order is ready for shipment. Seller may transfer the Product to storage, in which case all expenses incurred in connection with storage, including demurrage, preparation for storage, storage charges and handling shall be payable by Purchaser upon submission of invoices by Seller. Risk of loss to the Product shall pass to the Purchaser upon delivery of the Product into storage.</p>

# Selling Policy

<b>Customer's Own Material</b>	<p>A Purchaser who requests a fabric or other surface material not standard to Seller's line of Products ("COM") must submit samples of the requested material to Seller prior to entry of a purchaser order. Seller shall determine if the material is suitable to its manufacturing processes and meets any requirements of Underwriters Laboratories. If the COM is acceptable, Seller will then establish a price for using the COM or the Product in question. For a description of the procedures for submitting samples and testing, contact customer resources or your sales representative. Seller shall have no responsibility for the appearance, condition, performance, durability, colorfastness or any other physical attribute of the COM. Purchaser shall indemnify and hold Seller harmless for any damages, injuries or losses arising out of or related to use of the COM on the Product.</p>
<b>Warranty</b>	<p>Seller warrants to the original Purchaser only that the Products Seller manufactures and sells to Purchaser are free of defects in workmanship and materials, during the applicable warranty period set forth below.</p> <p>Should any failure to conform with this limited warranty appear to a Product listed below during the applicable warranty period from the date of shipment, Seller shall, upon prompt written notice, repair or replace, at its option and costs, the affected part or parts.</p> <p><i>Product and Period of Warranty</i></p> <p><i>Lifetime: AutoStrada, Calibre, Crinion Open Table, Currents, Dividends, Equity, Morrison, Reff</i> laminate and other non-wood components (except cascade edge worksurfaces, operational parts, controls, electrical, special or custom products, see below)</p> <p><i>10 Years: AutoStrada, Crinion Open Table and Reff</i> wood components, wood casegoods, <i>Interaction</i> tables (except height adjustment mechanisms for <i>Counterforce</i>, crank-adjustable, and split-top tables and worksurfaces, see below), <i>Reuter</i> overheads, <i>Reuter</i> vertical storage, <i>Bulldog, Chadwick, Essentials Work Chairs, Life, RPM</i> and <i>Sapper</i> seating structural and operational parts, controls, casters, pneumatic cylinders, seat and back mesh (except seating upholstery, finishes and labor, see below)</p> <p><i>5 Years:</i> Operational parts, controls, electrical (except light ballasts and bulbs, see below), cascade edge worksurfaces, special or custom product, wood veneer products, <i>A3, Currents</i> handcrank, <i>Interaction Counterforce, Interaction</i> crank-adjustable, and split-top mechanisms, <i>KnollStudio, KnollExtra</i> adjustable keyboard supports, VDT carousel, monitor platform, equipment storage drawers and all universal storage drawers, <i>Open Up, Visor</i> and <i>SoHo</i> seating structural and operational parts, controls, pneumatic cylinders (except seating upholstery, finishes and labor, see below)</p> <p><i>3 Years:</i> Upholstery, finishes and labor to repair the following chairs: <i>Bulldog, Chadwick, Life, Open Up, Parachute, RPM, Sapper</i> and <i>SoHo</i>.</p> <p><i>2 Years:</i> All other <i>KnollExtra</i> product</p> <p><i>1 Year:</i> Light ballasts and bulbs and <i>Equity</i> fiberglass panels, seating upholstered armpads and soft armpads, <i>Visor</i> finishes and labor to repair.</p> <p>This warranty does not apply to:</p> <ul style="list-style-type: none"><li>• Damage caused by a carrier other than the Seller.</li><li>• Normal wear and tear or acts or omissions of parties other than Seller (including user modification).</li><li>• COM or other third party materials applied to Products.</li><li>• Products not installed by or under the auspices of a certified dealer of Seller.</li><li>• Dramatic temperature variations or exposure to unusual conditions.</li><li>• Except as specifically noted above, textiles and upholstery supplied by <i>KnollTextiles</i> (consult current <i>KnollTextiles</i> price list for applicable warranty).</li><li>• Labor to repair or replace Essential Work Chairs affected part or parts.</li></ul> <p>Natural variations occurring in wood, marble, and leather shall not be considered defects, and the Seller does not guarantee the colorfastness or matching of the colors, grains or textures, or surface hardness of such materials. The Seller also does not guarantee the colorfastness of fiberglass panel surfaces. THE EXPRESS WARRANTIES CONTAINED HEREIN ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE AND ALL OTHER WARRANTIES ARISING FROM COURSE OF DEALING OR USAGE OF TRADE.</p> <p>The remedies provided above are the Purchaser's sole remedies for any failure of Seller to comply with its obligations regarding the workmanship of its Products. Correction of any nonconformity in the manner and for the period of time provided shall constitute complete fulfillment of all liabilities of Seller, with respect to or arising out of the Product furnished hereunder.</p>
<b>Delay/Force Majeure</b>	<p>Seller shall not be liable for failure to perform or for delay in performance due to fire, flood, strike or other labor difficulty, act of God, act of any governmental authority or of the Purchaser, riot, embargo, fuel or energy shortage, wrecks or delay in transportation, inability to obtain necessary labor, materials or manufacturing facilities from usual sources or failure of suppliers to meet their contractual obligations, or due to any cause beyond its reasonable control. If any such event occurs, Seller may extend delivery dates by a period of time necessary to overcome the effect of such delay, allocate available Product or cancel any purchase order.</p>
<b>Compliance with Law</b>	<p>PURCHASER IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL LAWS, ORDINANCES, REGULATIONS, RULES AND STANDARDS RELATING TO THE INSTALLATION, MAINTENANCE, USE AND OPERATION OF THE PRODUCTS.</p>
<b>Patents</b>	<p>Subject to the following provisions, Seller shall, at its own expense, defend or, at its option, settle any claim, suit or proceeding brought against the Purchaser, and/or its vendees, mediate and immediate, so far as based on an allegation that any Product or any part thereof furnished hereunder constitutes a direct or a contributory infringement of any claim of any patent of the United States or Canada. This obligation shall be effective only if Purchaser shall have made all payments then due hereunder and if Seller is notified promptly in writing and given authority, information and assistance for the defense of said claim, suit or proceeding. Seller shall pay all damages and costs awarded in such suit or proceedings so defended.</p> <p>The foregoing indemnity does not apply to the following:</p> <ul style="list-style-type: none"><li>• Products supplied according to a design other than that of Seller, and which is required by the Purchaser.</li><li>• Combination of the Product with another product not furnished hereunder unless Seller is a contributory infringer.</li><li>• Any settlements of a suit or proceeding made without Seller's written consent.</li></ul>
<b>Limitations of Liability</b>	<p><b>SELLER, ITS CONTRACTORS, AUTHORIZED DEALERS AND SUBCONTRACTORS OR SUPPLIERS OF ANY TIER SHALL NOT BE LIABLE TO PURCHASER FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM A BREACH OF THIS AGREEMENT.</b></p> <p>Purchaser's remedies set forth herein are exclusive and the liability of Seller with respect to the breach of this agreement or any contract entered into between the parties pursuant hereto shall not exceed the price of the Product or part on which such liability is based.</p>

# KnollKey Lock Program

## KnollKey Lock Program General Information

Following is the KnollKey lock policy, applicable to all products.

### Key-alike

For the convenience of the user, furniture may be keyed alike at no charge. Write "Key-alike" in the description of your purchase order for any pedestal, overhead, file or other item you wish to have keyed alike.

Using the key-alike instructions, order cores and keys as line items on your purchase order. Do NOT submit a key-alike form. The Knoll East Greenville Lock Center will select key numbers from the standard range of K 001 - K 250. Key numbers will not be repeated unless over 250 sets are ordered. Lock cores keyed-alike will ship separately from the product, ready for field installation.

There is no charge for key-alike orders if placed with the furniture order.

**IF THE KEY-ALIKE ORDER IS NOT PLACED AT LEAST TWO WEEKS PRIOR TO THE FURNITURE SHIP DATE, A \$50 HANDLING CHARGE AND AIR FREIGHT CHARGES WILL APPLY.**

**If product is ordered and shipped random-keyed, additional lock cores for key-alike are billable.**

### Random-Keying

To specify product keyed-random, write "key-random" in the product description. Random-keyed product is shipped with the lock core factory installed. A shrouded key is included. Random means no effort has been made to match key numbers, or to make them different.

### Keys

A Knoll shrouded key is shipped with every lock core. 250 Key numbers are available. For numbers above 250, contact Custom Product Development. Additional keys and key blanks are available. See service parts for more information.

### Master Keying

Knoll locks can be controlled by means of a master key. There is no additional per-lock charge for master keying. A letter of approval from the client must accompany orders for master keys.

### Installing Lock Cores

Lock cores can be installed or removed in the field by using a change key. Cores must be in the unlocked position to be removed. See service parts for change key pattern number and pricing.

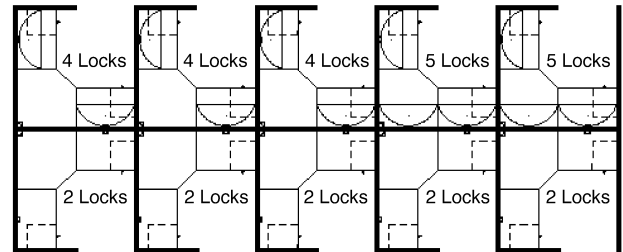
### Lock Distribution

All orders for key-alike lock cores/keys are packaged and shipped from the East Greenville Lock Center, regardless of where the pedestals, overhead, or other units are produced. Random keyed product will have cores factory-installed.

## How to Specify Key-Alike

Following is an example of how to specify key-alike for a cluster of 10 workstations.

**Step 1** - Using the project floorplan, count the number of locks in each workstation.



**Step 2** - Count the number of workstations with the same quantity of locks. Group together the workstations with a like number of locks.

5 workstations with 2 locks per station  
3 workstations with 4 locks per station  
2 workstations with 5 locks per station

**Step 3** - For the first group (5 sets of 2 locks), enter the number of workstations in the quantity column.

Qty	Pattern #	Description	Unit List	Ext. List
5				

**Step 4** - Then enter the pattern number "KSPEC\_ \_" and add a suffix for the number of locks for that group (i.e., for 2 locks per station, add the suffix "2"). Up to 30 lock cores are available in a set (i.e., KSPEC 30).

Qty	Pattern #	Description	Unit List	Ext. List
5	KSPEC 2	Set of 2 cores/keys	N / C	N / C

**Step 5** - Repeat for other groups.

Qty	Pattern #	Description	Unit List	Ext. List
5	KSPEC 2	Set of 2 cores/keys	N / C	N / C
3	KSPEC 4	Set of 4 cores/keys	N / C	N / C
2	KSPEC 5	Set of 5 cores/keys	N / C	N / C

Your Key instructions are complete.

Knoll will select key numbers for each set from 250 available numbers. Additional key numbers are available through Custom Product Development. **For additions to existing installations, specify desired key numbers in the description.**

## Service Parts

Pattern #	Description	List Price
KKEY_ _ _	Shrouded Key Specify key number desired	\$5
KBLANK	Shrouded Key Blank	\$5
KSPECB_ _ _	Retrofit Universal Core/Key Specify key number desired	\$18
KCHANGE	Change Key	\$5
KMASTER*	Master Key	\$5

\*Note: A letter of approval on company letterhead from the client must accompany all orders for master keys.

# General Ordering Information

---

## **The Products**

This guide encompasses all standard products for this product group.

## **Sizes**

Dimensions listed in this guide are indicated as:

H = height

W = width

D = depth

Dia. = diameter

Rad. = radius

## **Pricing**

All prices shown are list.

## **How to Order**

Select pattern numbers and quantities required for your complete installation. Product questions can be addressed in the specific sections of this guide or by contacting your sales representative or customer resource representative at 1-800-343-5665.

Next, select options (if required), along with colors and finishes appropriate to each product. Reference the Finishes and Fabrics pages for color designations.

On large installations, an item's "designated area" can be specified to assist in product organization and handling.

To expedite complete / correct entry of your order, be certain all pattern numbers, quantities, colors and area identifications are completely specified. Also, include complete purchase order numbers, bill-to and ship-to addresses, a contact name and specific factory shipping dates required.

## **Mail all orders to:**

Knoll, Inc.

1235 Water Street

P.O. Box 157

East Greenville, PA 18041

Attention: Order Entry

Once your order is entered at Knoll, an acknowledgment will be mailed to you. You will be advised of your scheduled shipping date within five days of the original acknowledgment. If it is necessary to revise your order, please contact your customer resource representative.

## Sustainability Statement

---

Sustainable design is a key component of Knoll's environmental focus. Our commitment to social responsibility and a healthy environment has prompted us to further articulate our longstanding environmental programs and, with encouragement and support from our colleagues in the industry, we have re-energized our focus on such "green" initiatives as life cycle analysis and LEED™ certification. Knoll is proud to have contributed to projects that have received LEED certification from the U.S. Green Building Council.

For the latest information on Knoll products that help our customers achieve LEED certification, log on to [knoll.com](http://knoll.com), click on "About Knoll" and then "Environmental Focus."