


Column Leg Tables

Glides only

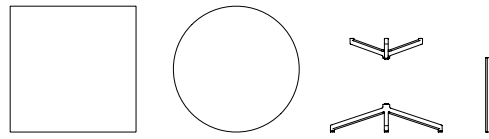

Round tables:	Square tables:
KBXL36DG	KBXL3030G
KBXW36DG	KBXW3030G
KBXC36DG	KBXC3030G
KBXB36DG	KBXB3030G

Parts list:

- 1 Table top
- 1 Column extrusion
- 1 Top support
- 1 Base (with glides)

Tools needed:

- Allen wrench
- Torque wrench

Hardware:

- 8 Socket cap head 5/16-18 x 3.00 screws (base/support to extrusion)
- 4 Socket cap head 5/16-18 x 2.00 screws (base to top)
- 2 Vertical wire management clips (clear plastic)

Please pay close attention to torque requirements.

Step 1.

Attach the column extrusion (A) to the base (B) using 4 socket cap head 5/16-18 x 3.00 screws (C), torque: 200 in/lb.

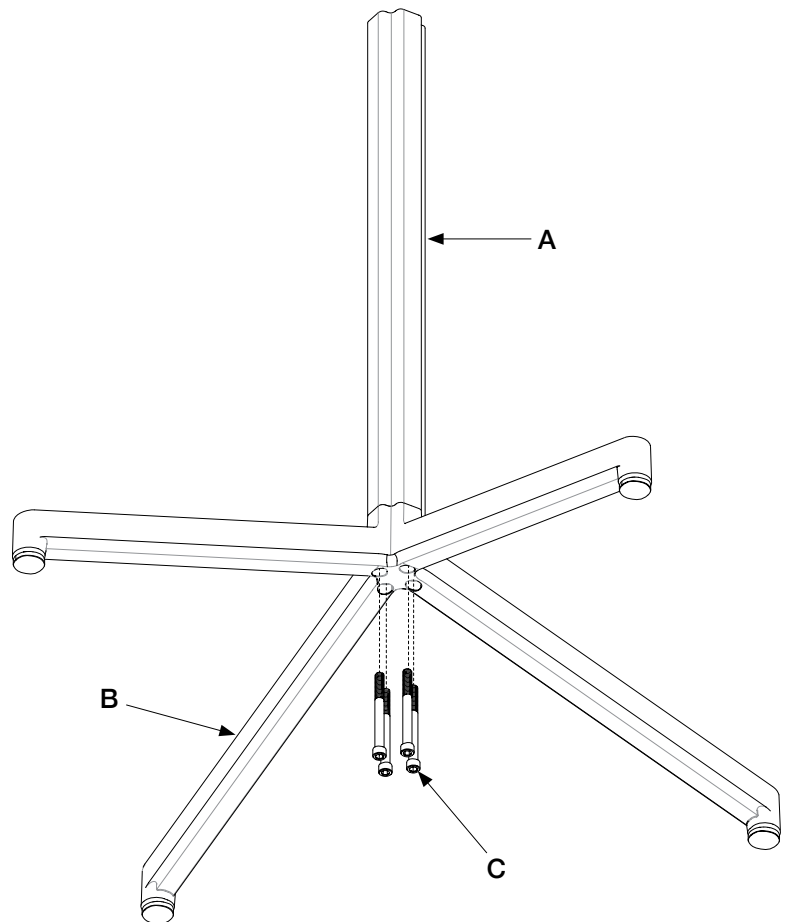


Fig. 1

Column Leg Tables

Step 2.

Attach the column extrusion and base (D) to the top support (E) using 4 socket cap head 5/16-18 x 3.00 screws (F), torque: 200 in/lb.

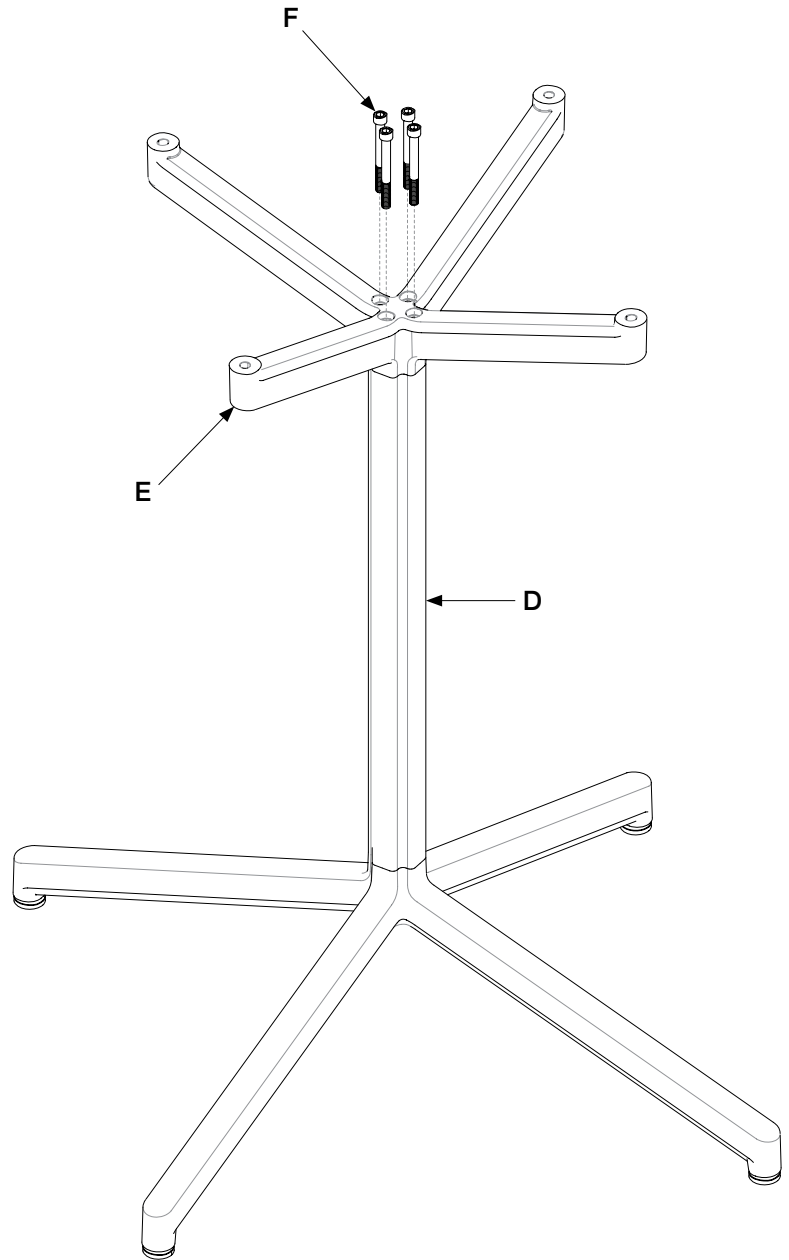


Fig. 2

Column Leg Tables

Step 3.

Lay the inverted table top on the floor.

Step 4.

Attach the base assembly (D) to the top using 4 socket cap head 5/16-18 x 2.00 screws (E), torque: 130 in/lb.

Step 5.

Turn the assembled table into the upright position.

All tables come with 2 vertical wire management clips for use with optional electrical modules. See separate electrical installation instructions for details.

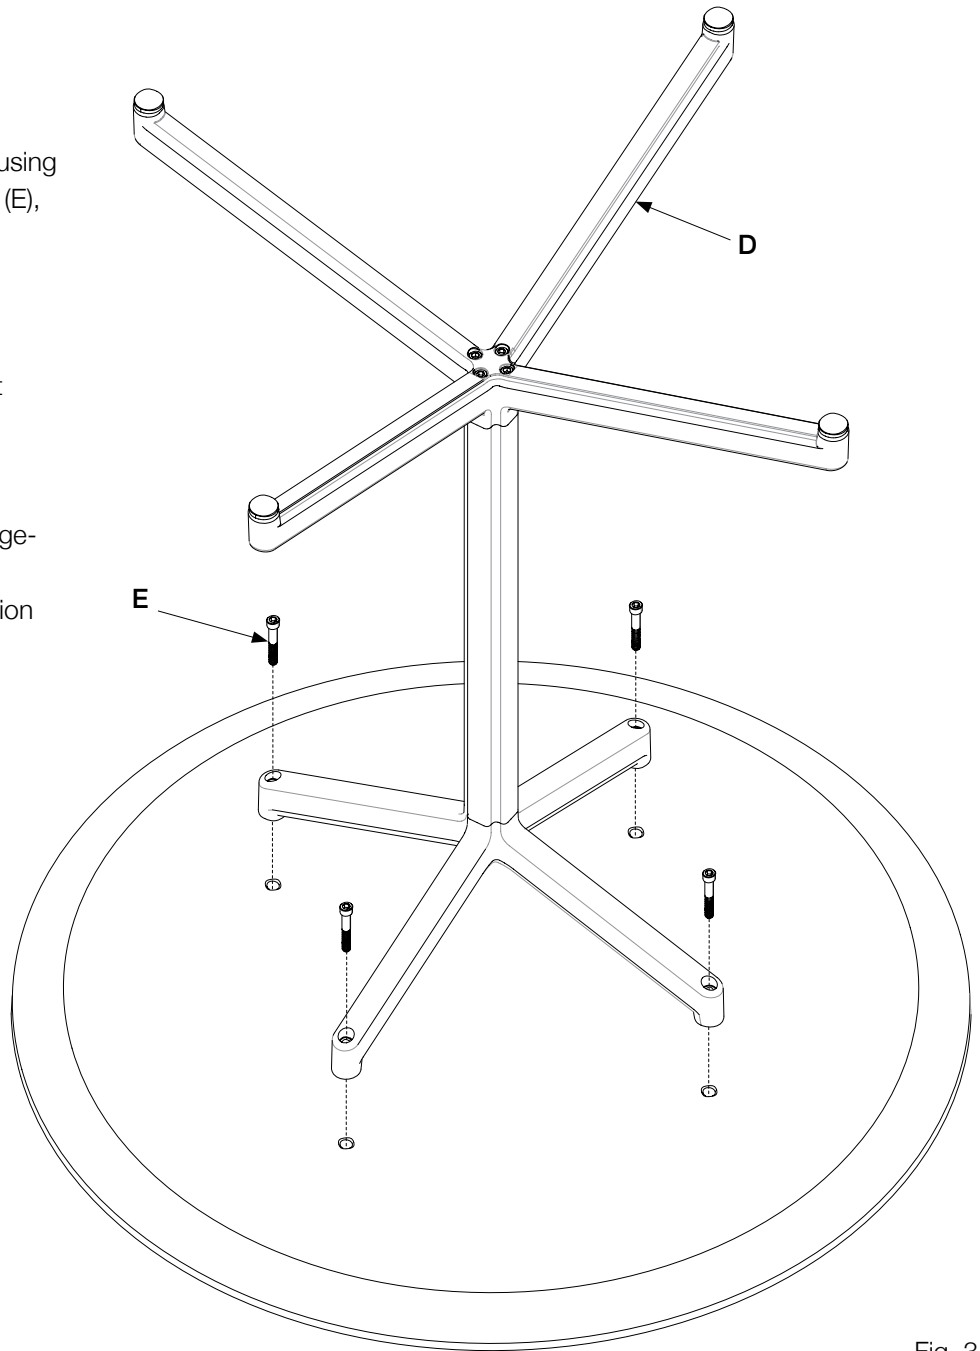


Fig. 3