










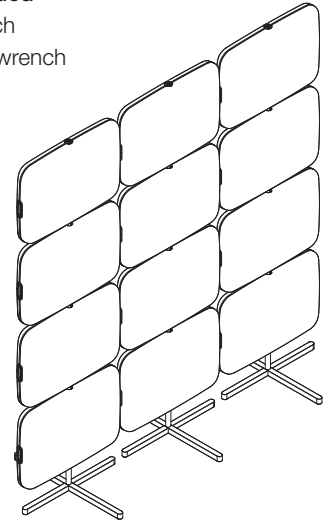
Telly™ Screen Installation Instructions

Reference Number: 6AJ9011

HARDWARE LIST					
 P/N: 6AJ101004 SUPPORT ROD, CONNECTOR - 4 SEGMENT	 P/N: 6AJ1047 BASE	 P/N: 6AJ1003 SEGMENT			
	 P/N: 6AJ1011 SPACER, PIVOT TUBE	 P/N: 6AJ1002 SCR, MACH, FLH, HEXDR, 5/16-18 x 1.25 (BLACK)	 P/N: 6AJ1018 TOP CAP OVERMOLD ASSY.		
	 P/N: 6AJ1004 LINK, SEGMENT CONNECTOR	 P/N: 6AJ1020 LOCKING CAP FILLER CAP - HOUSING	 P/N: 6AJ1019 END CAP - HOUSING		

Tools Needed

Allen wrench
Open end wrench




Assemble base and support rod, install first segment

1. Install threaded support rod (A) to base assembly (B). Support rod will be full height of assembled totem, either 2, 3 or 4 segments high. Use open end wrench to tighten thread rod (A) to base assembly (B). (Fig. 1)
2. Slide first Telly segment (C) onto support rod (A). Making sure connector key hole slot on side reads TOP (Fig. 4), right side up. Make sure to align set pin on base assembly (B) to notch in passthrough tube of Telly segment (C). First segment has properly engaged set pin if it does not spin. (Fig. 2)

Fig. 1


Fig. 2

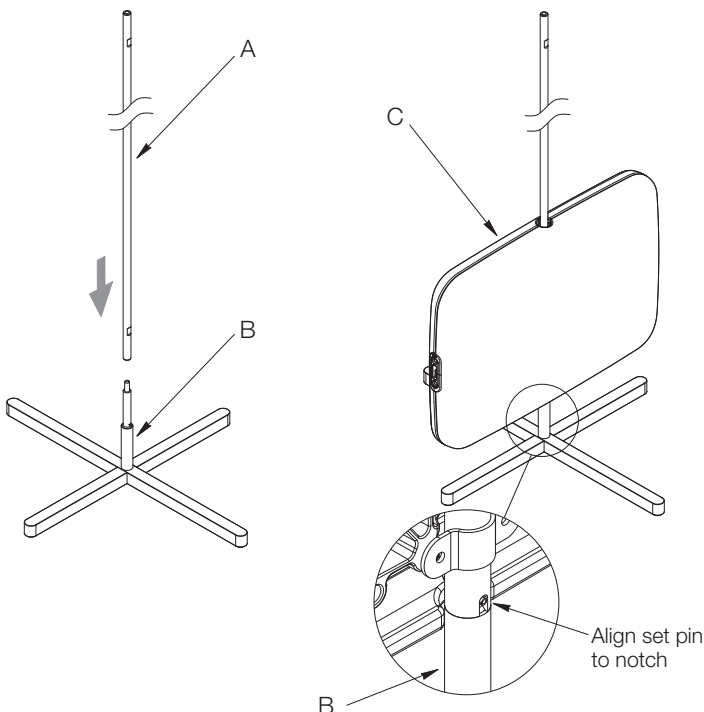

Place adjoining bases, support rods and first segments

3. Place adjoining bases in desired final configuration, either straight line or curvilinear (up to 160 degrees).
Note: For stability purposes, a minimum of two configured totems, connected at adjoining Telly segments are required.
 Repeat steps 1 and 2 for each base in configuration. (Fig. 3)

Fig. 3

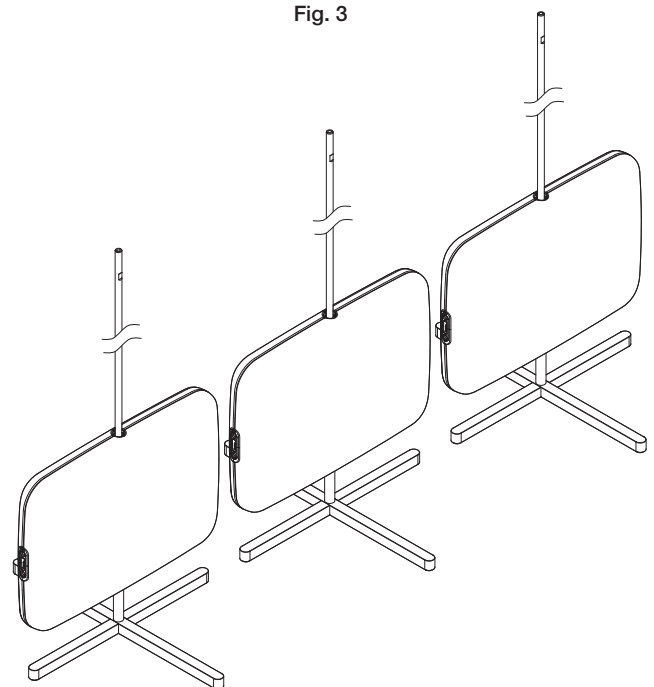

Telly™ Screen Installation Instructions

Reference Number: 6AJ9011

Connect multiple segments

4. For connecting multiple segments (C) side by side, insert connector (G) into key hole slot of segments (C), and slide down to engage. (Fig. 4)
5. Insert locking cap (H) into key hole slot of segment (C) just above connector (G), and push in all the way until it clicks into place. (Fig. 5)

Fig. 4



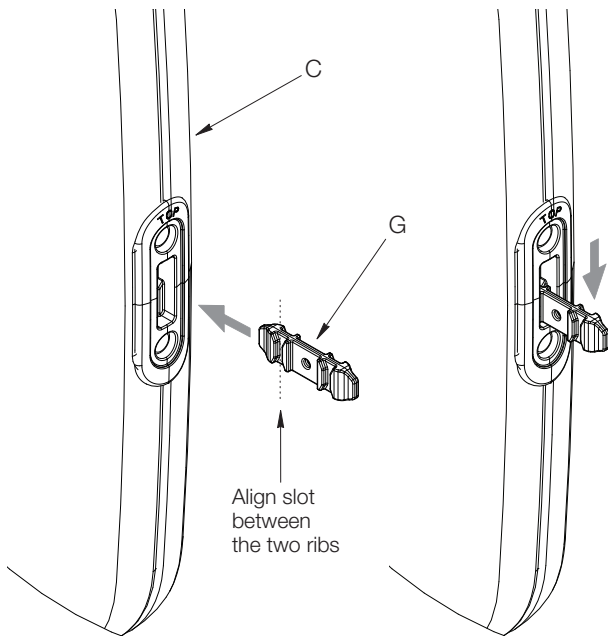


Fig. 5

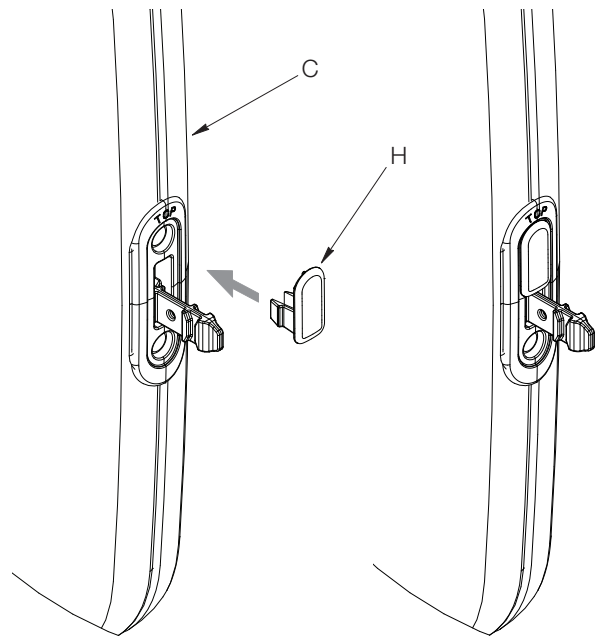

6. Using connector (G), connect segments (C) side by side. Repeat step 4 and 5 to connect across bottom row of configuration. (Fig. 6)

Fig. 6

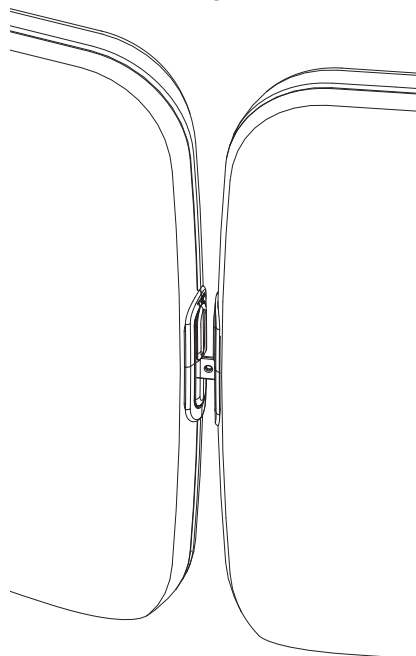

Telly™ Screen Installation Instructions

Reference Number: 6AJ9011

Stack and connect segments by row

7. Add spacer (D) onto support rod (A) between segments (C). (Fig. 7)
8. Connect adjoining segments (C) by row before stacking all segments in each totem. (Fig. 8)

Cap each totem

9. Install 5/16 flat head screw (E) into top of support rod (A) on top segment (C). Tighten and torque screw (E) using Allen wrench. Install magnetic top cap (F) to complete assembly. (Fig. 9)
10. Install end cap (I) to each end segment. (Fig. 10)

Fig. 7

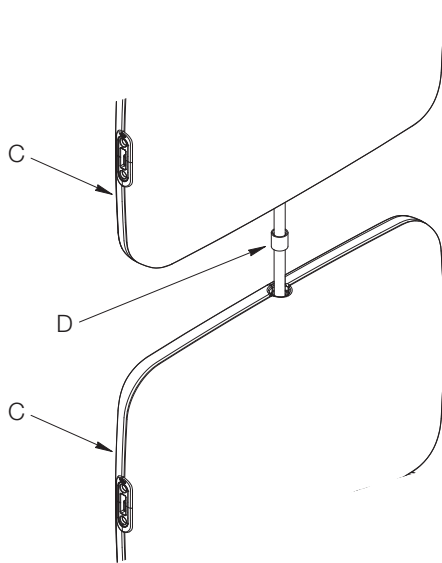


Fig. 8

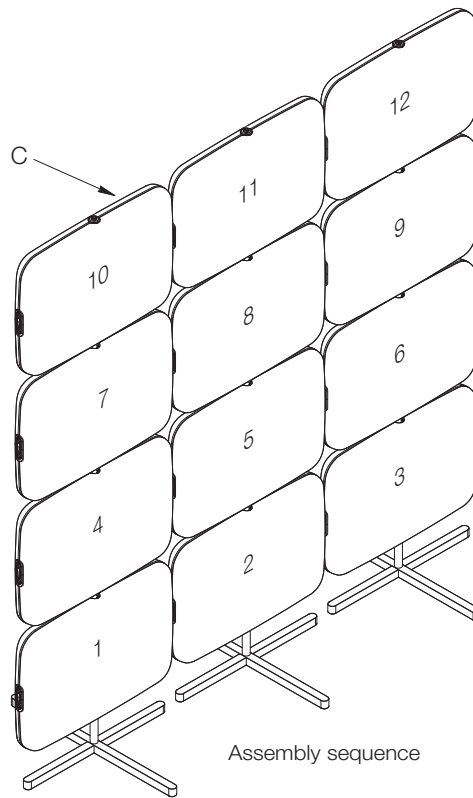


Fig. 10

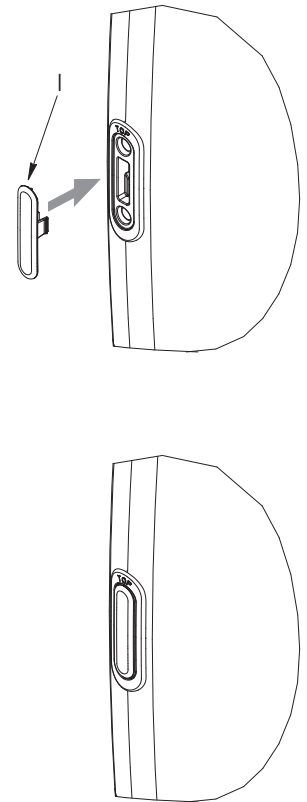


Fig. 9

