



Quoin® Locker Worksurface Mount Bracket

Hardware

(2) L-Bracket
2MA4051



(1) Backer Plate
2MA4052



(3) 1/4-20 x 3/8" Machine
screws 2MA4176H01



(3) 1/4-20 Acorn Nuts
2MA1735H02




(3) 1/4-14 x 1" Screws
4A21402H01



NOTE: For proper stability, worksurface depth must match depth of locker

1. Attach L-Bracket to underside of worksurface through slots in bracket using supplied 1/4-14 x 1" screws. Align bracket with the back edge of worksurface. Do not fully tighten screws.
2. With worksurface right side up, align locker to worksurface and L-bracket. Using L-Bracket as a template, drill pilot holes (9/32" diameter) for 1/4-20 x 3/8" machine screws through locker side panel.
3. Align Backer Plate with pilot holes from inside the locker.
4. From the outside, insert supplied 1/4-20 x 3/8" machine screws through L-Bracket, locker side panel and backing plate. Secure machine screws with supplied acorn nuts on the inside of the locker.
5. Fully tighten screws in worksurface.

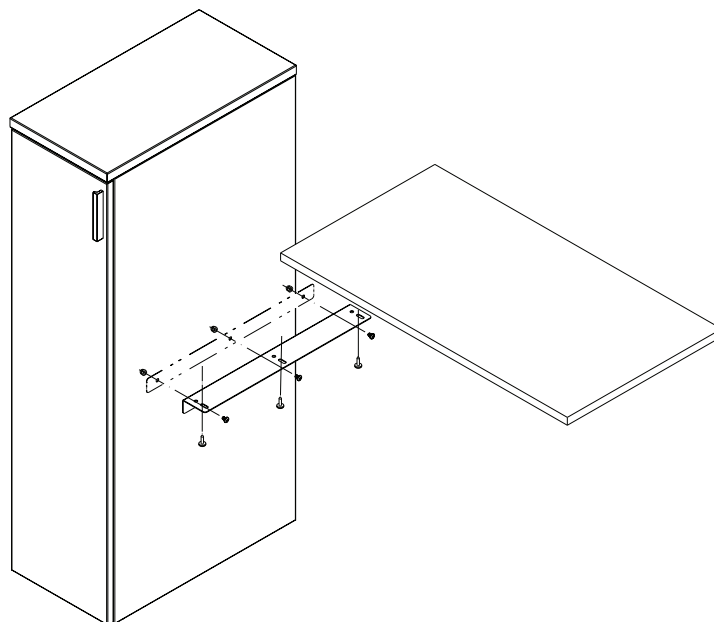

Detail view

