

# Rockwell Unscripted® Creative Wall® Install Instructions

## Stability Components: Feet and Fin Outriggers

### Table of Contents

<u>Feet: single and double sided foot</u>	<u>1-6</u>
<u>Square Anchored Foot Plate</u>	<u>7-13</u>
<u>Fin Outriggers</u>	<u>14-19</u>

# Rockwell Unscripted® Creative Wall® Install Instructions

## Feet

### Pattern Numbers Represented:

Unscripted Borders Feet 1 Sided, **UBF1**\_\_

2 Sided, **UBF2**\_\_

Unscripted Border Feet Extended Height Bracket, **UBFHCB**

### Tools Needed:

Drill

Phillips #3 Bit

12" Bit Extension

½" Box Wrenches (2)

3/16" Allen Wrench

### Part List:

(A) 1-Sided Foot Plate (1 per assy)

(B) 2-Sided Foot Plate (1 per assy)

(C) Upper Foot Bracket (1 per assy)


(D) Lower Foot Bracket (1 per assy)

(E) 5/16-18 x 3/4" Flat Head Screw (4 per assy)


(F) 5/16-18 x 5/8" Hex Head Screw (4 per assy)

(G) 5/16-18 Hex Nuts (4 per assy)


(H) ¼-20 x 3-1/4" Pan Head Screw (H) (4 per assy)




(A) 6AJ1209




(B) 6AJ120802



(C) 6AJ1296



(D) 6AJ1201




(D) 6AJ120102  
(UBFHCB)




(E) 6AJ1215



(G) 6AJ4111



(F) 6AJ1217



(H) 6AJ4022

### STEPS:


#### Note:

- The Wall Stability Guidelines must be consulted and followed for proper positioning and spacing between Feet and other support features.
- The 1-sided and 2-sided foot assemblies are the same except for the foot plates.
- Feet can be mounted at three locations. Specified layout is to be followed:
  - The end of a Wall Frame.
  - Straddling or adjacent to the joint between two Frames.
  - Straddling or adjacent to 2" Mid-Upright.
- Feet are installed at glide mounting points. If a Glide Bracket is already installed at the specified foot location, remove the Glide Bracket and relocate it to an adjacent mounting point if possible.
- Feet accommodate the standard 1.75" height adjustment range. The Extended Height Bracket (UBFHCB) provides a substitute Lower Foot Bracket (D) for an additional 1.75" height extension.

1. Attach the Lower Foot Bracket (D) to the appropriate Foot Plate (A or B) using (4) 5/16-18 x 3/4" Flat Head Screws (E).
2. Install the Lower Foot Bracket (D) with the Upper Foot Bracket (C) using (4) 5/16-18 x 5/8" Hex. Head Screws (F) and (4) 5/16-18 Hex Nuts (G). Do not tighten the screws and nuts at this stage.

#### Note:

It is critical to use the provided serrated flanged 5/16-18 x 5/8" Hex Head Screws (F) and serrated flanged 5/16-18 Hex Nuts (G). The 5/8" Hex Head Screws (F) **MUST** be on the outside of the brackets and kept loose until Step 4.

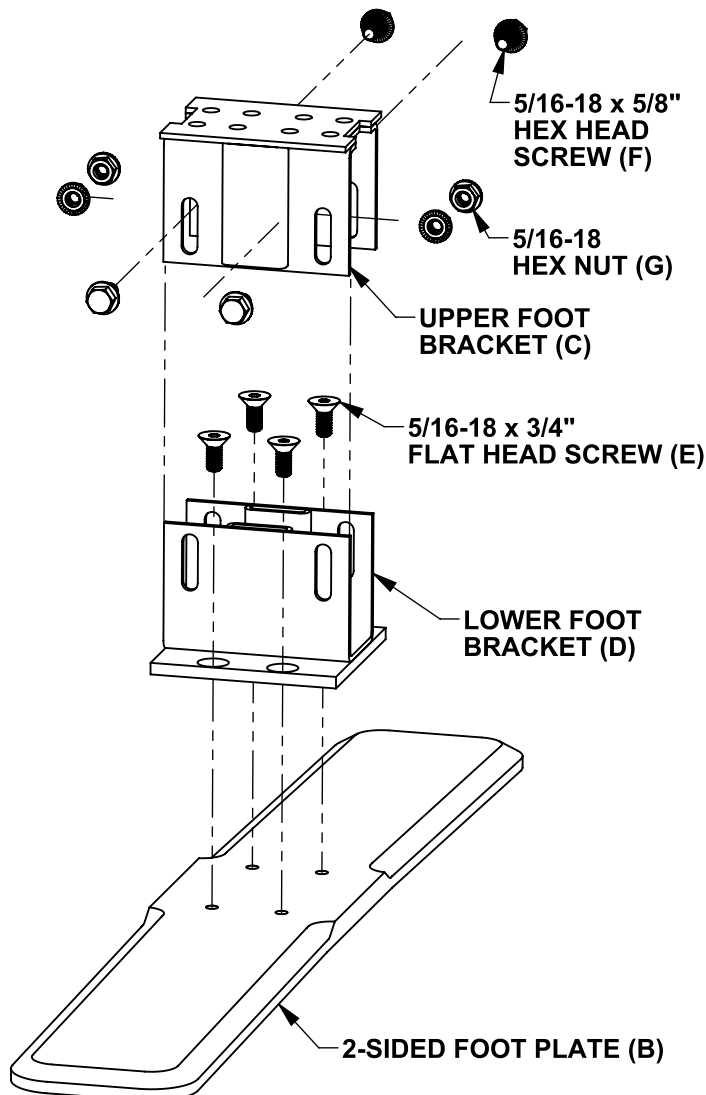

# Rockwell Unscripted® Creative Wall® Install Instructions

## Feet

3. Install the Upper Foot Bracket (C) to the bottom of the Wall Frame's lower Horizontal. Use (4) 1/4-20 x 3-1/4" Pan Head Screws (H) from the top of the Horizontal. The assembled foot can be slid under standing Wall Frames.

### Note:

The Upper Foot Bracket (C) has 8 threaded holes. The threaded holes used will be determined by the foot location and corresponding existing holes in the Horizontal.


4. The 5/16-18 x 5/8" Hex Head Screws (F) and 5/16-18 Hex Nuts (G) are to be tightened after the Wall Frames have been height adjusted and leveled using the Glides. The Foot Plate is to be flat against the floor.

### Note:

- Wall Frames can be plumbed by holding the Wall Frames vertical as the 5/16-18 x 5/8" Hex Head Screws (F) and 5/16-18 Hex Nuts (G) are tightened.
- Further adjustments can be made before tightening the 5/16-18 x 5/8" Hex Head Screws (F) and 5/16-18 Hex Nuts (G) by


pushing the Wall Frame slightly beyond vertical but in the direction opposite of its unadjusted tilt.

- Wall Frame Stability can sometimes be improved by using several 1-sided Feet (A) on alternating sides of the Wall Frame. At each Foot location push the Wall Frame slightly beyond vertical but in the direction opposite of the Foot before tightening the 5/16-18 x 5/8" Hex Head Screws (F) and Hex Nuts (G).

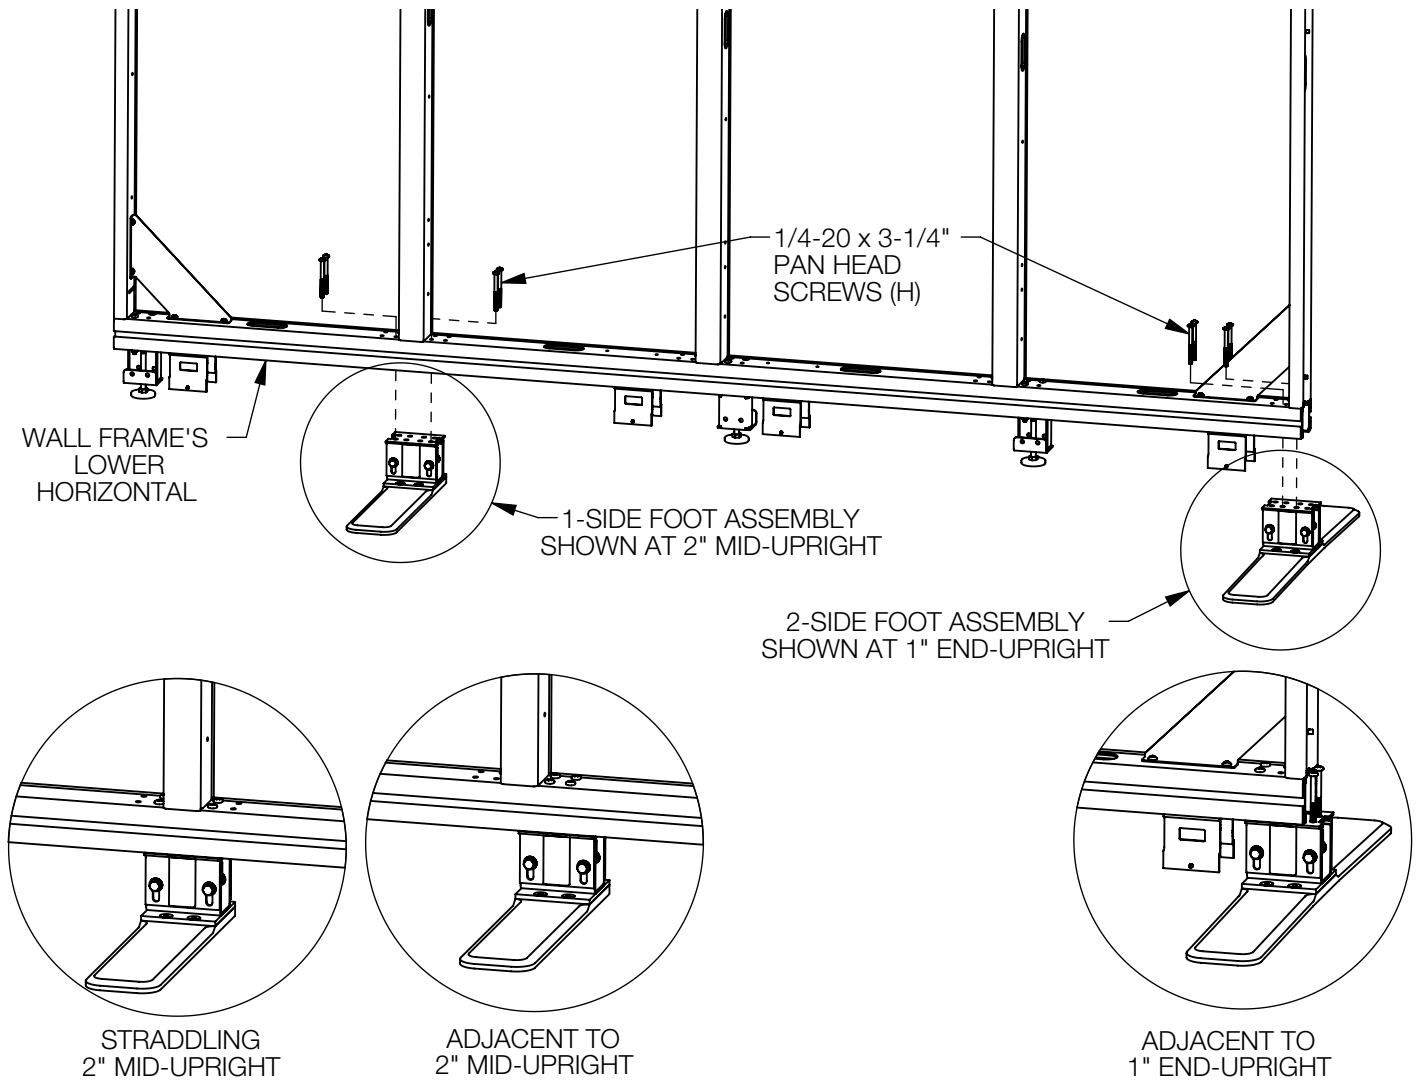


# Rockwell Unscripted® Creative Wall® Install Instructions

## Foot

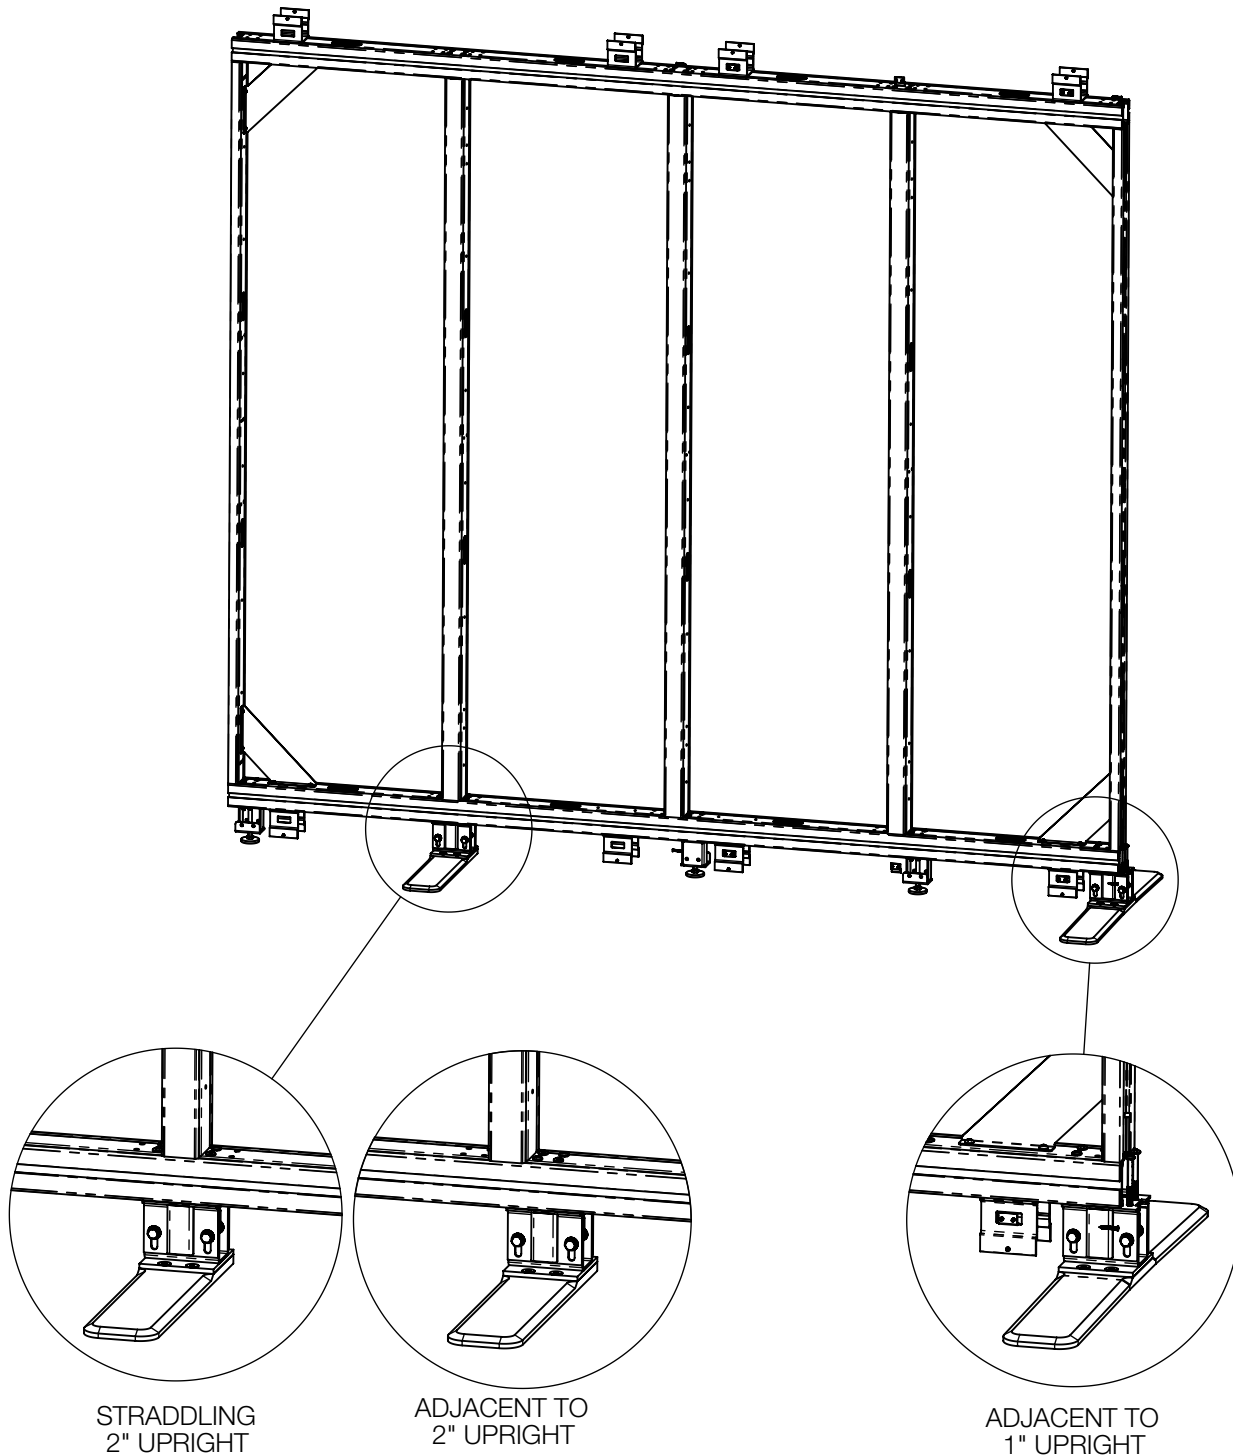


# Rockwell Unscripted® Creative Wall® Install Instructions

## Foot






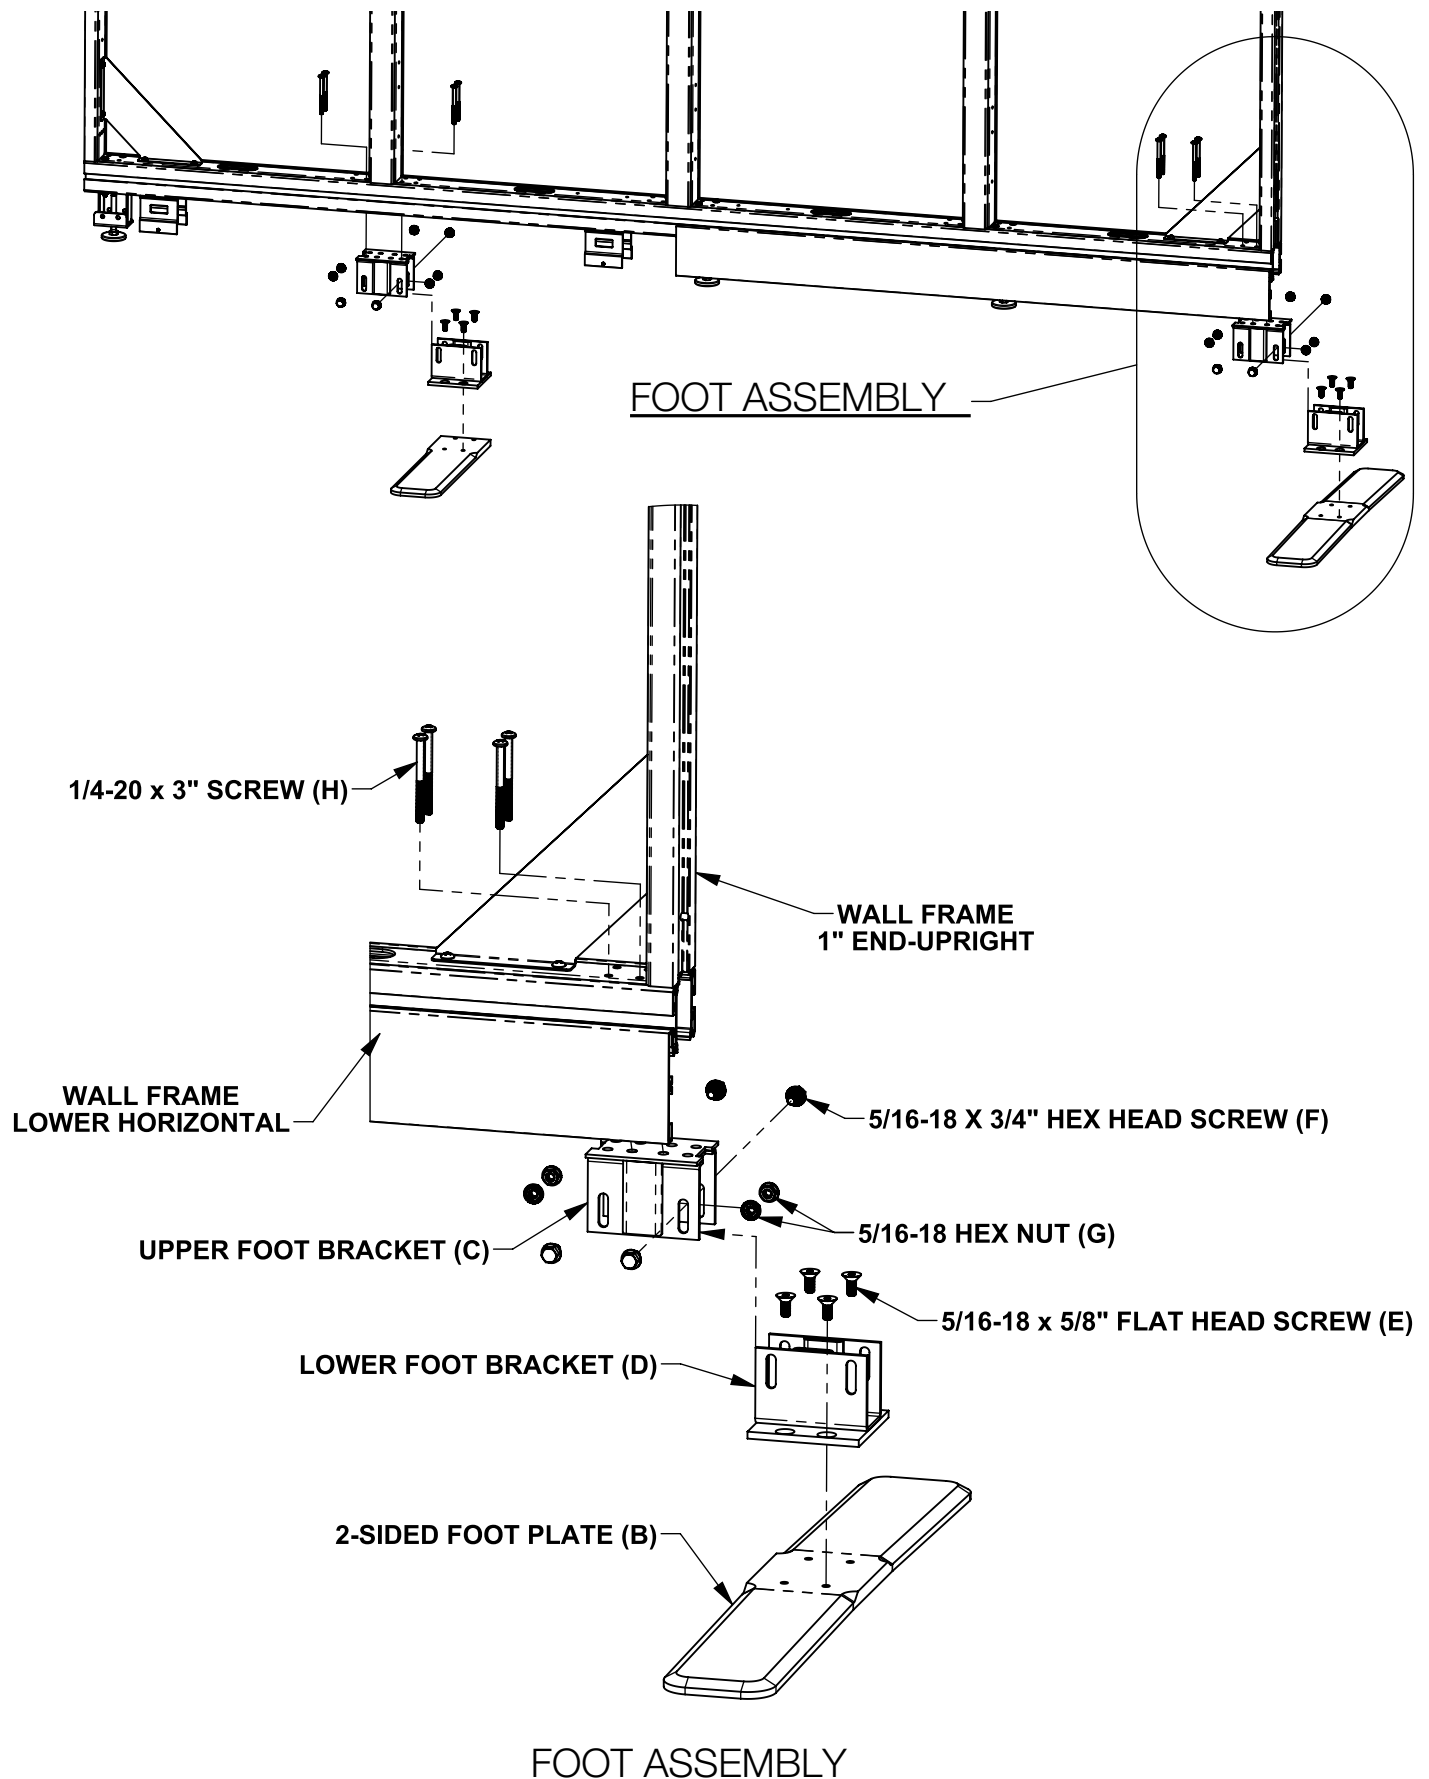




# Rockwell Unscripted® Creative Wall® Install Instructions

## Foot

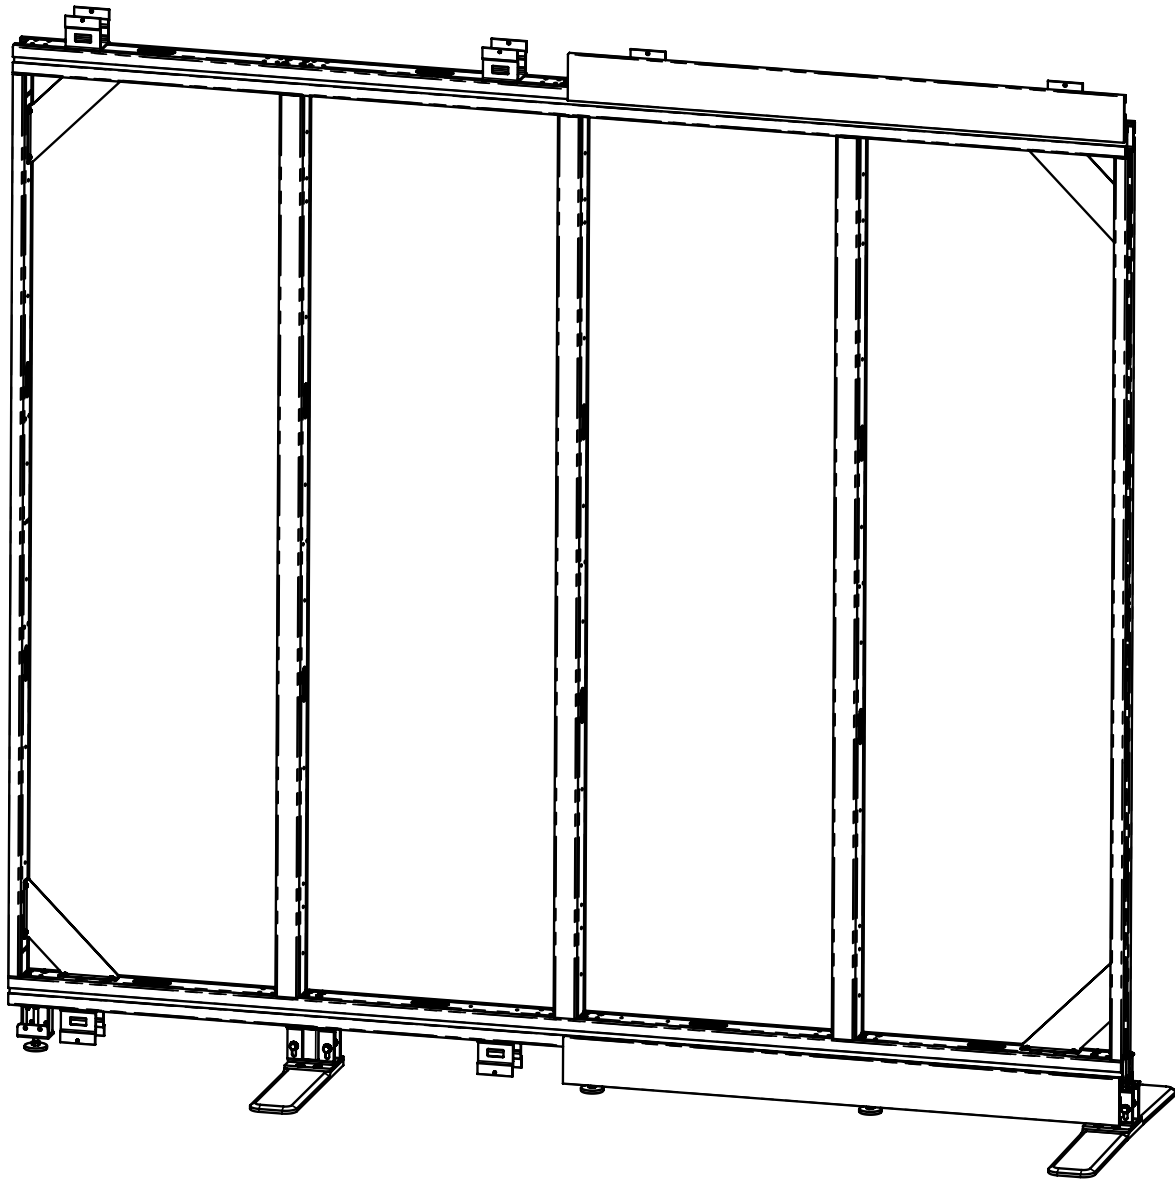

# Rockwell Unscripted® Creative Wall® Replacement Parts Feet

Description	Reference*	Replacement Pattern Number
One-sided foot plate kit, 16", with screws 	6AJ1209 6AJ1215	<b>KR6AJ1209( )</b> Includes: 6AJ1209( ) - qty 1 (foot) 6AJ1215 - qty 4 (screw)  <b>Finish options: (111) jet black, (114) folkstone grey, (115) medium grey, (118) bright white, (120) black brown</b>
Two-sided foot plate kit, 28", with screws 	6AJ120802 6AJ1215	<b>KR6AJ120802( )</b> Includes: 6AJ120802( ) - qty 1 (foot) 6AJ1215 - qty 4 (screw)  <b>Finish options: (111) jet black, (114) folkstone grey, (115) medium grey, (118) bright white, (120) black brown</b>
Foot bracket, upper 	6AJ1296	<b>KR6AJ1296</b> <b>HLKR6AJ1296 24-Response</b> Includes: 6AJ1296 - qty 1
Foot bracket, lower 	6AJ1201	<b>KR6AJ1201</b> <b>HLKR6AJ1201 24-Response</b> Includes: 6AJ1201 - qty 1
Scr, mach, flh, socdr, 5/16-18 x .75", with lockpatch 	6AJ1215	<b>KR6AJ1215</b> <b>HLKR6AJ1215 24-Response</b> Includes: 6AJ1215 - qty 1 (Total required per assy = 4)
Screw, hex head, serrated flange, 5/16-18 x .62", black 	6AJ1217	<b>KR6AJ1217</b> <b>HLKR6AJ1217 24-Response</b> Includes: 6AJ1217 - qty 1 (Total required per assy = 4)
Hex nut, serrated flange, 5/16-18, zinc 	6AJ4111	<b>KR6AJ4111</b> <b>HLKR6AJ4111 24-Response</b> Includes: 6AJ4111 - qty 1 (Total required per assy = 4)
Screw, pan head phillips drive, 1/4-20 x 3.25", black, with lockpatch 	6AJ4022	<b>KR6AJ4022</b> <b>HLKR6AJ4022 24-Response</b> Includes: 6AJ4022 - qty 1 (Total required per assy = 4)

## General Notes

1. "HL" and "ZZ" prefix in pattern number denotes 24-Response. Part will be shipped within 24-hours via ground service, pending availability; quantity limits and higher pricing apply.
2. See the product [Price Lists on www.Knoll.com](http://www.Knoll.com) for material, textile, and finish options denoted by ( ).
3. \* Not offered as an orderable service part number.

# Rockwell Unscripted® Creative Wall® Install Instructions

## Square Anchored Foot Plate

### Pattern Numbers Represented:

Unscripted Borders Square Anchored Foot Plate, **UBFSA**


Unscripted Border Feet Extended Height Bracket, **UBFHFB**

### Part List:

- (A) Square Foot Plate (1 per assy)
- (B) Square Foot Plate Covers (2 per foot)
- (C) Upper Foot Bracket (1 per foot)
- (D) Lower Foot Bracket (1 per foot)
- (E) 5/16-18 x 5/8" Flat Head Screw (4 per assy)
- (F) 5/16-18 x 5/8" Hex Head Screw (4 per assy)
- (G) 5/16-18 Hex Nuts (4 per assy)
- (H) 1/4-20 x 3-1/4" Pan Head Screw (4 per assy)
- (I) Double-Sided Tape (4 per assy)

### Tools Needed:

- Drill
- Phillips #3 Bit
- 12" Bit Extension
- 1/2" Box Wrenches (2)
- 3/16" Allen Wrench

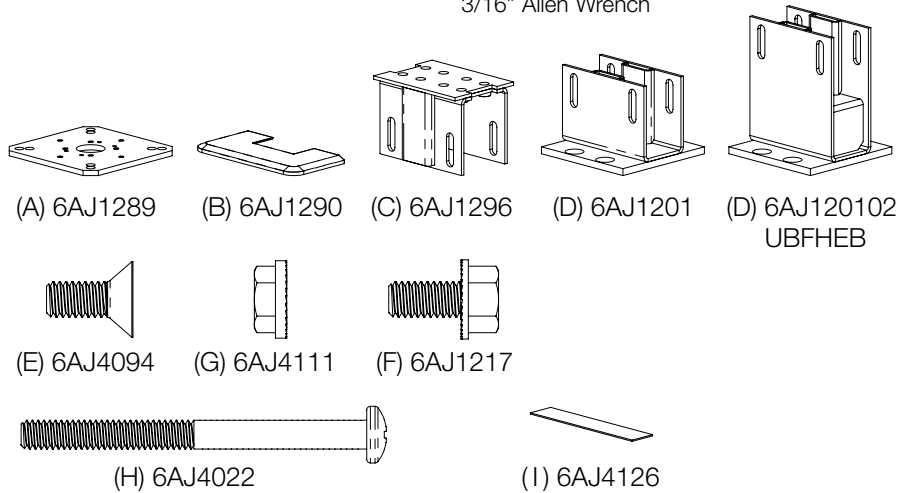

### STEPS:


#### Note:

- The Wall Stability Guidelines must be consulted for proper positioning and spacing between Square Anchored Foot Plates and other support features.
- Square Anchored Foot Plates are required to be screwed to the floor.
- Square Anchored Foot Plates can be mounted at three locations. Specified layout is to be followed:
  - The end of a Wall Frame.
  - Straddling or adjacent to the joint between two Frames.
  - Straddling or adjacent to 2" Mid-Upright.
- Square Anchored Foot Plates are installed at glide mounting points. If a Glide Bracket is already installed at the specified foot location, remove the Glide Bracket and relocated it to an adjacent mounting point if possible.
- Square Anchored Foot Plates accommodate the standard 1.75" height adjustment range. The Extended Height Bracket (UBFHFB) provides a substitute Lower Foot Bracket (D) for an additional 1.75" height extension.

1. Attach the Lower Foot Bracket (D) to the Square Foot Plate (A) using (4) 5/16-18 x 5/8" Flat Head Screws (E).
2. Install the Lower Foot Bracket (D) with the Upper Foot Bracket (C) using (4) 5/16-18 x 5/8" Hex Head Screws (F) and (4) 5/16-18 Hex Nuts (G). Do not tighten the screws and nuts at this stage.

#### Note:

It is critical to use the provided serrated flanged 5/16-18 x 5/8" Hex Head Screws (F) and serrated flanged 5/16-18 Hex Nuts (G). The 5/8" Hex Head Screws (F) **MUST** be on the outside of the brackets and kept loose until Step 4.

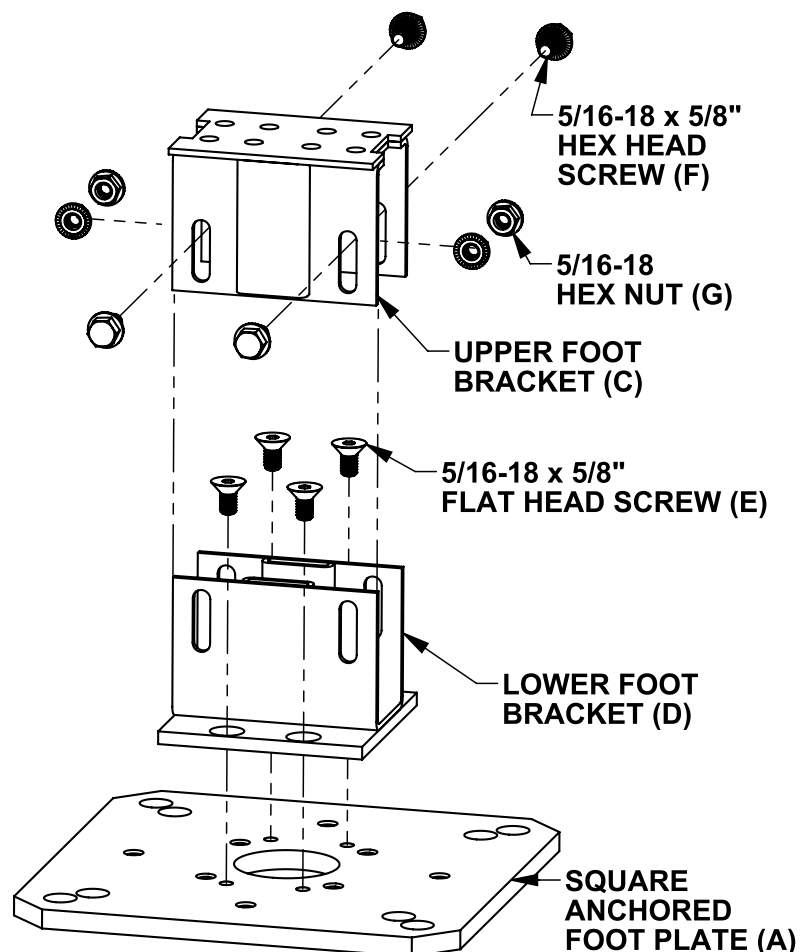




# Rockwell Unscripted® Creative Wall® Install Instructions

## Square Anchored Foot Plate

3. Install the Upper Foot Bracket (C) to the bottom of the Wall Frame's lower Horizontal. Use (4) 1/4-20 x 3-1/4" Pan Head Screws (H) from the top of the Horizontal. The assembled foot plate can be slid under standing Wall Frames.

**Note:**  
The Upper Foot Bracket (C) has 8 threaded holes. The 4 threaded holes used will be determined by the foot location and corresponding existing holes in the Horizontal.

4. Adjust the height and levelness of the Wall Frames using the Wall Frame glides.

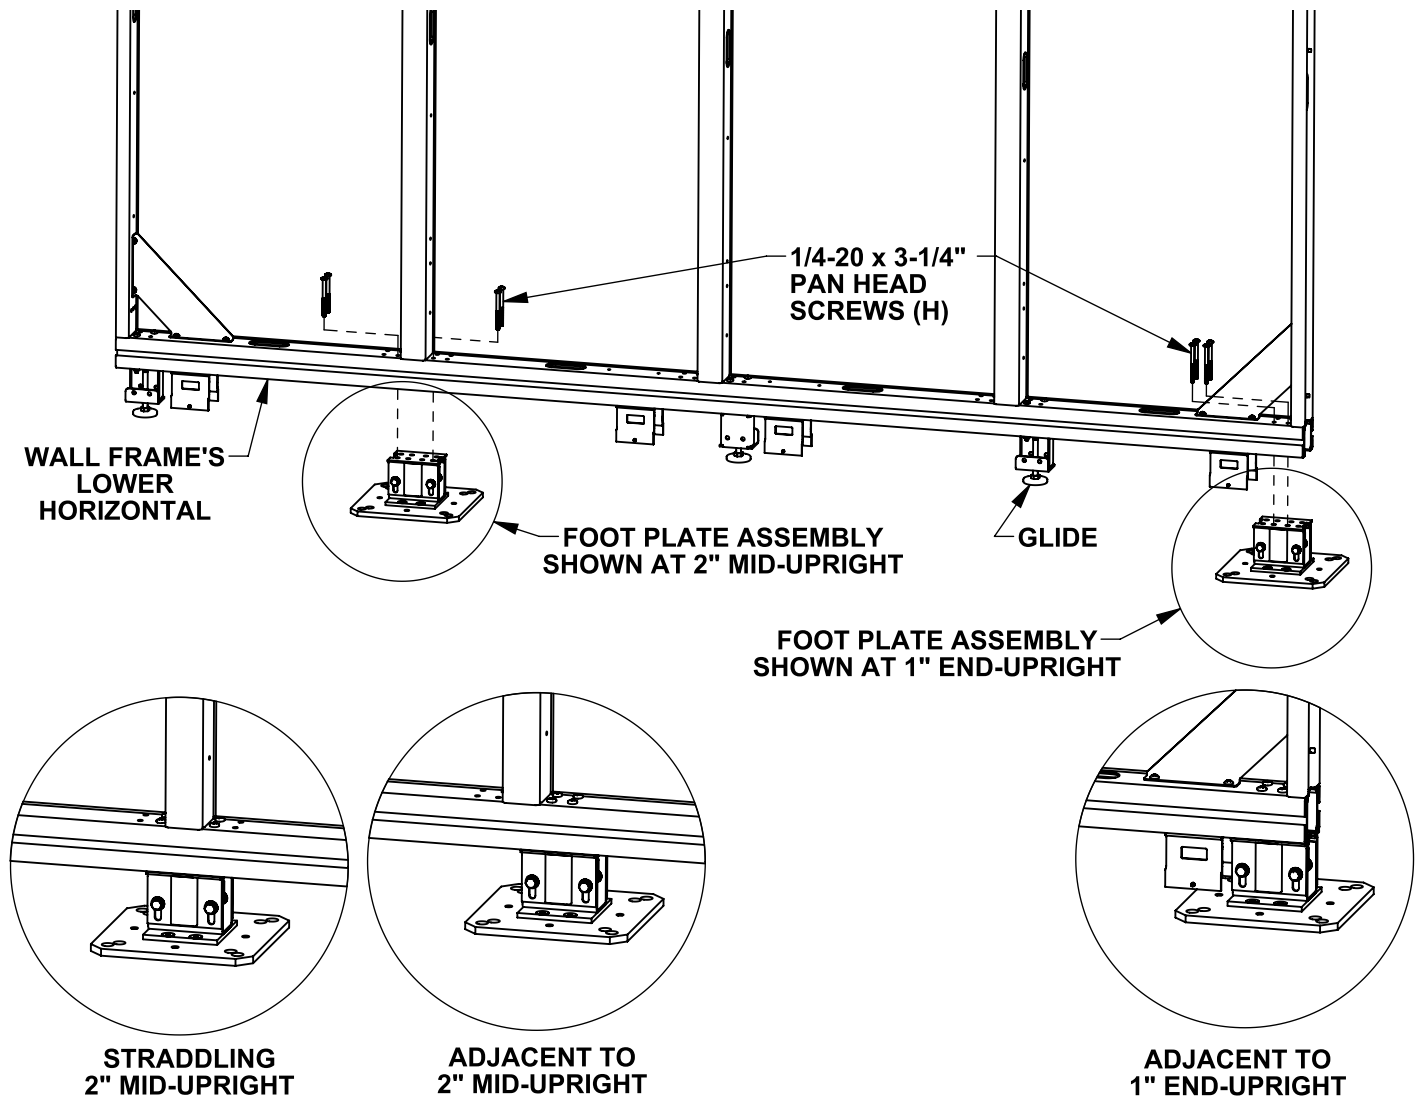

# Rockwell Unscripted® Creative Wall® Install Instructions

## Square Anchored Foot Plate


5. Attach the Square Foot Plate (A) to the floor using appropriate ¼" flat-head screws appropriate for the floor type. This hardware is not provided.

**Note:**

- Four ¼" Flat-Head screws, one in each corner of the Square Foot Plate (A), must be used. When possible, use the outermost holes. The second hole at each corner is to be used if the outermost holes cannot be used. The heads of the screws

cannot extend above the top surface of the Square Foot Plate (A).

- If the floor is significantly out of level at the desired foot location, place shims under the Square Foot Plate (A) at the appropriate corners. Shim material is not provided.

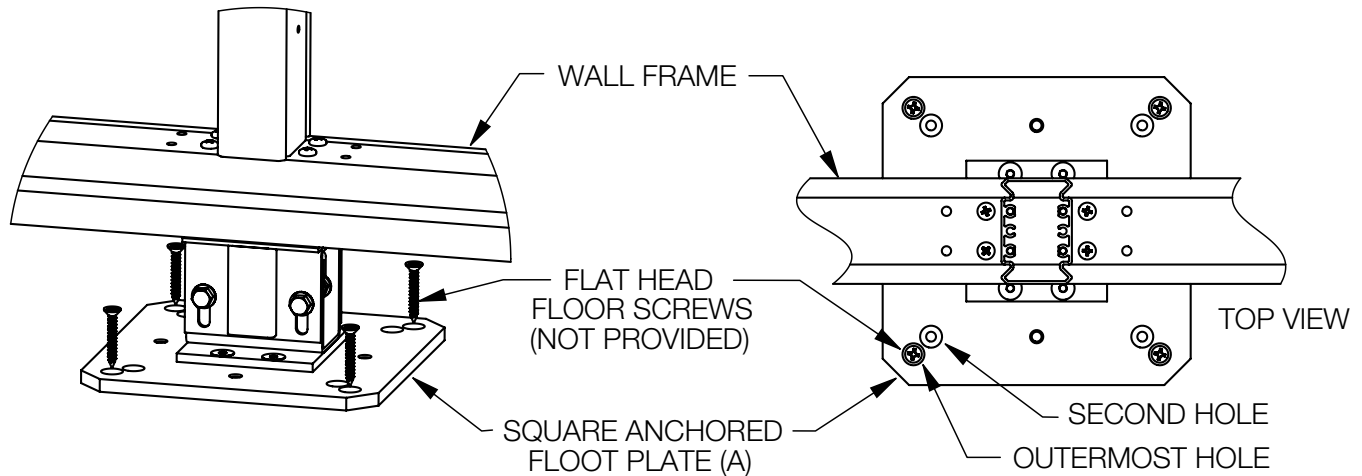

6. Tighten the 5/16-18 x 5/8" Hex Head Screws (F) and 5/16-18 Hex Nuts (G) installed in Step.


**Note:**

- Wall Frames can be plumbed by holding the Wall Frames vertical as the 5/16-18 x 5/8" Hex Head Screws (F) and 5/16-18 Hex Nuts (G) are tightened.
- Further adjustments can be made before tightening the 5/16-18 x 5/8" Hex Head

Screws (F) and 5/16-18 Hex Nuts (G) by pushing the Wall Frame slightly beyond vertical but in the direction opposite of its unadjusted tilt.


7. Ensure that the Square assembly is accurately positioned, plumb, level and secure before attaching the Square Foot Plate Covers (B). Use the (4) 4" pieces of Double-Sided Tape (I) to attach the covers to the Column Floor Plate

(C). Peel the backer off one side of each piece of tape and position them on the top surface of the Square Foot Plate (A) along each of the 4 sides. Remove the remaining backer sheet on each piece of Double-Sided Tape (I) and install the (2) Square Foot Plate Covers (A) down onto the Square Foot Plate and tape. Firmly push the covers against the tape for at least 30 seconds.

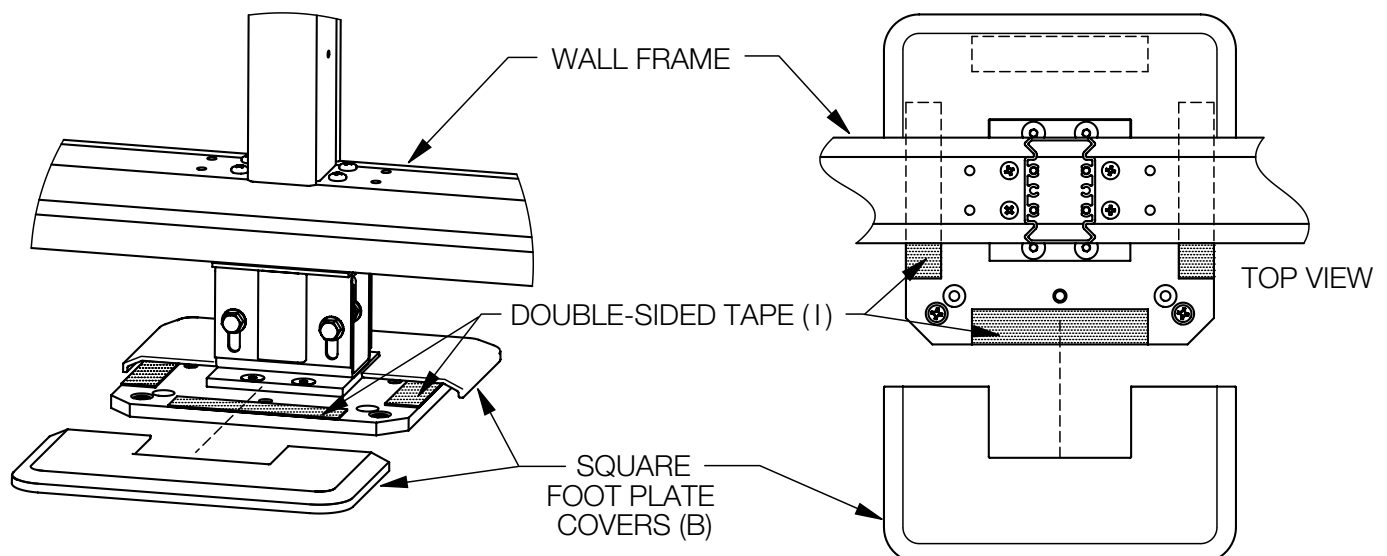


# Rockwell Unscripted® Creative Wall® Install Instructions

## Square Anchored Foot Plate

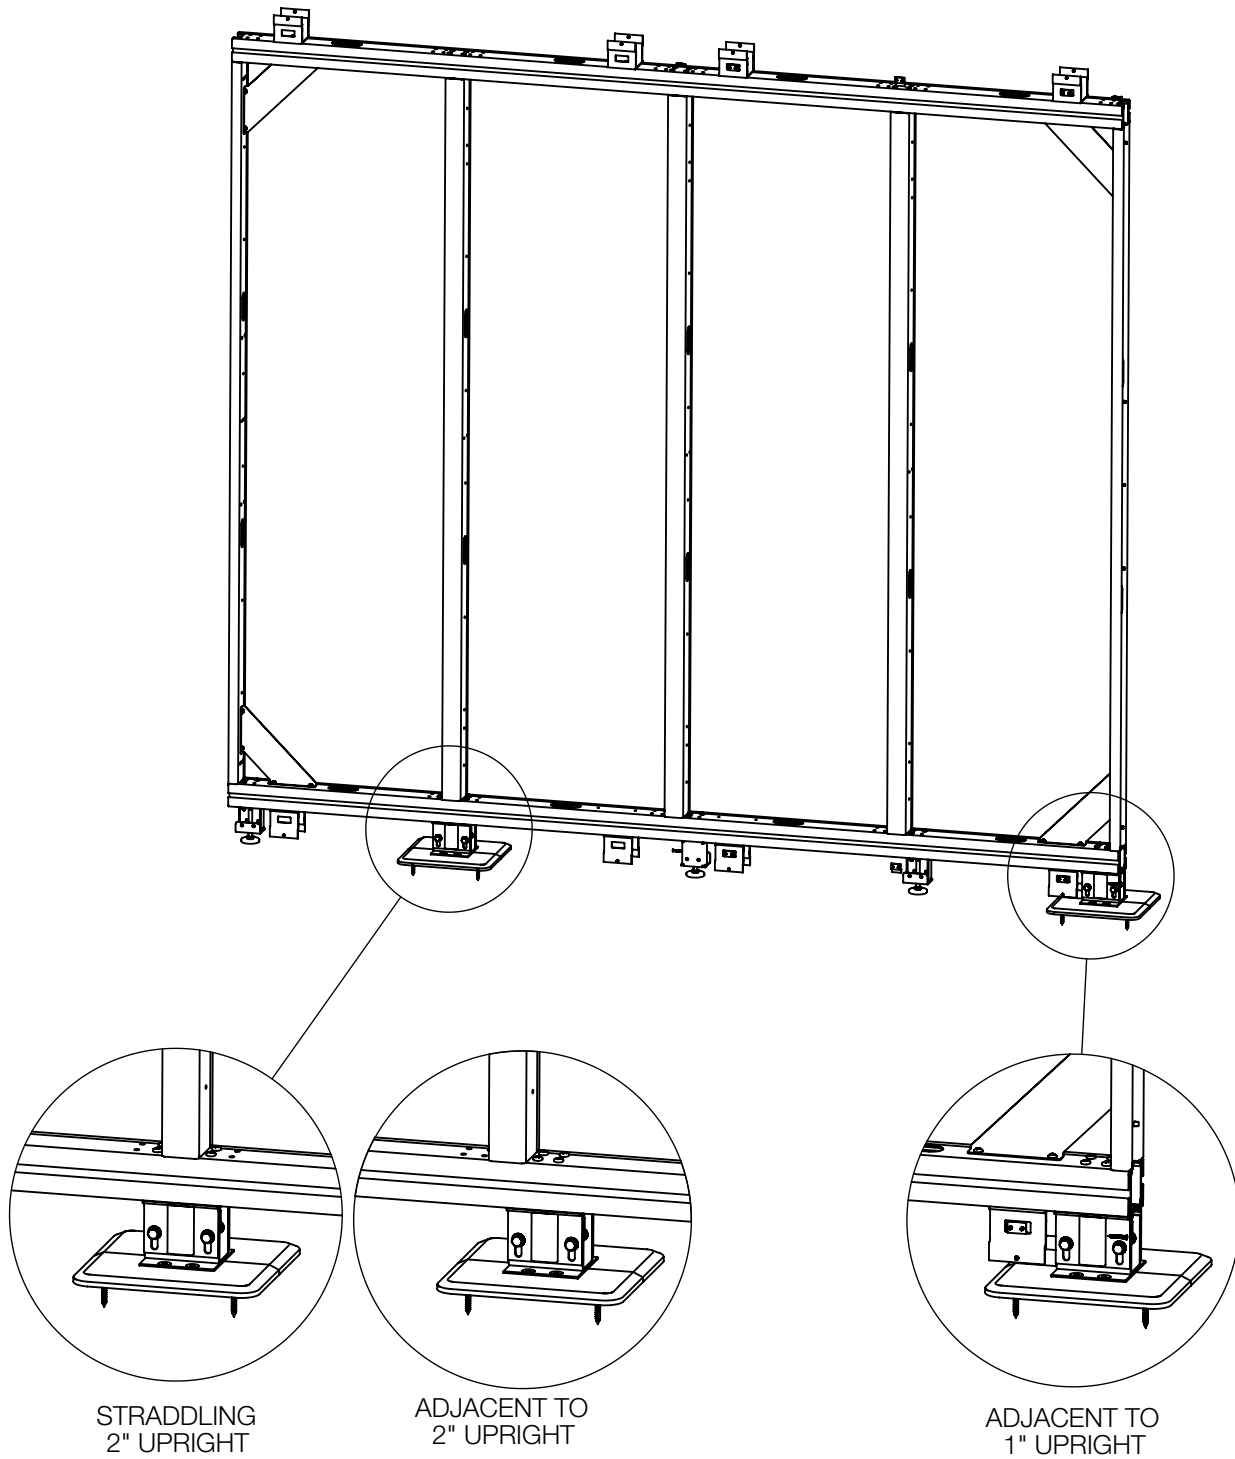


# Rockwell Unscripted® Creative Wall® Install Instructions

## Square Anchored Foot Plate

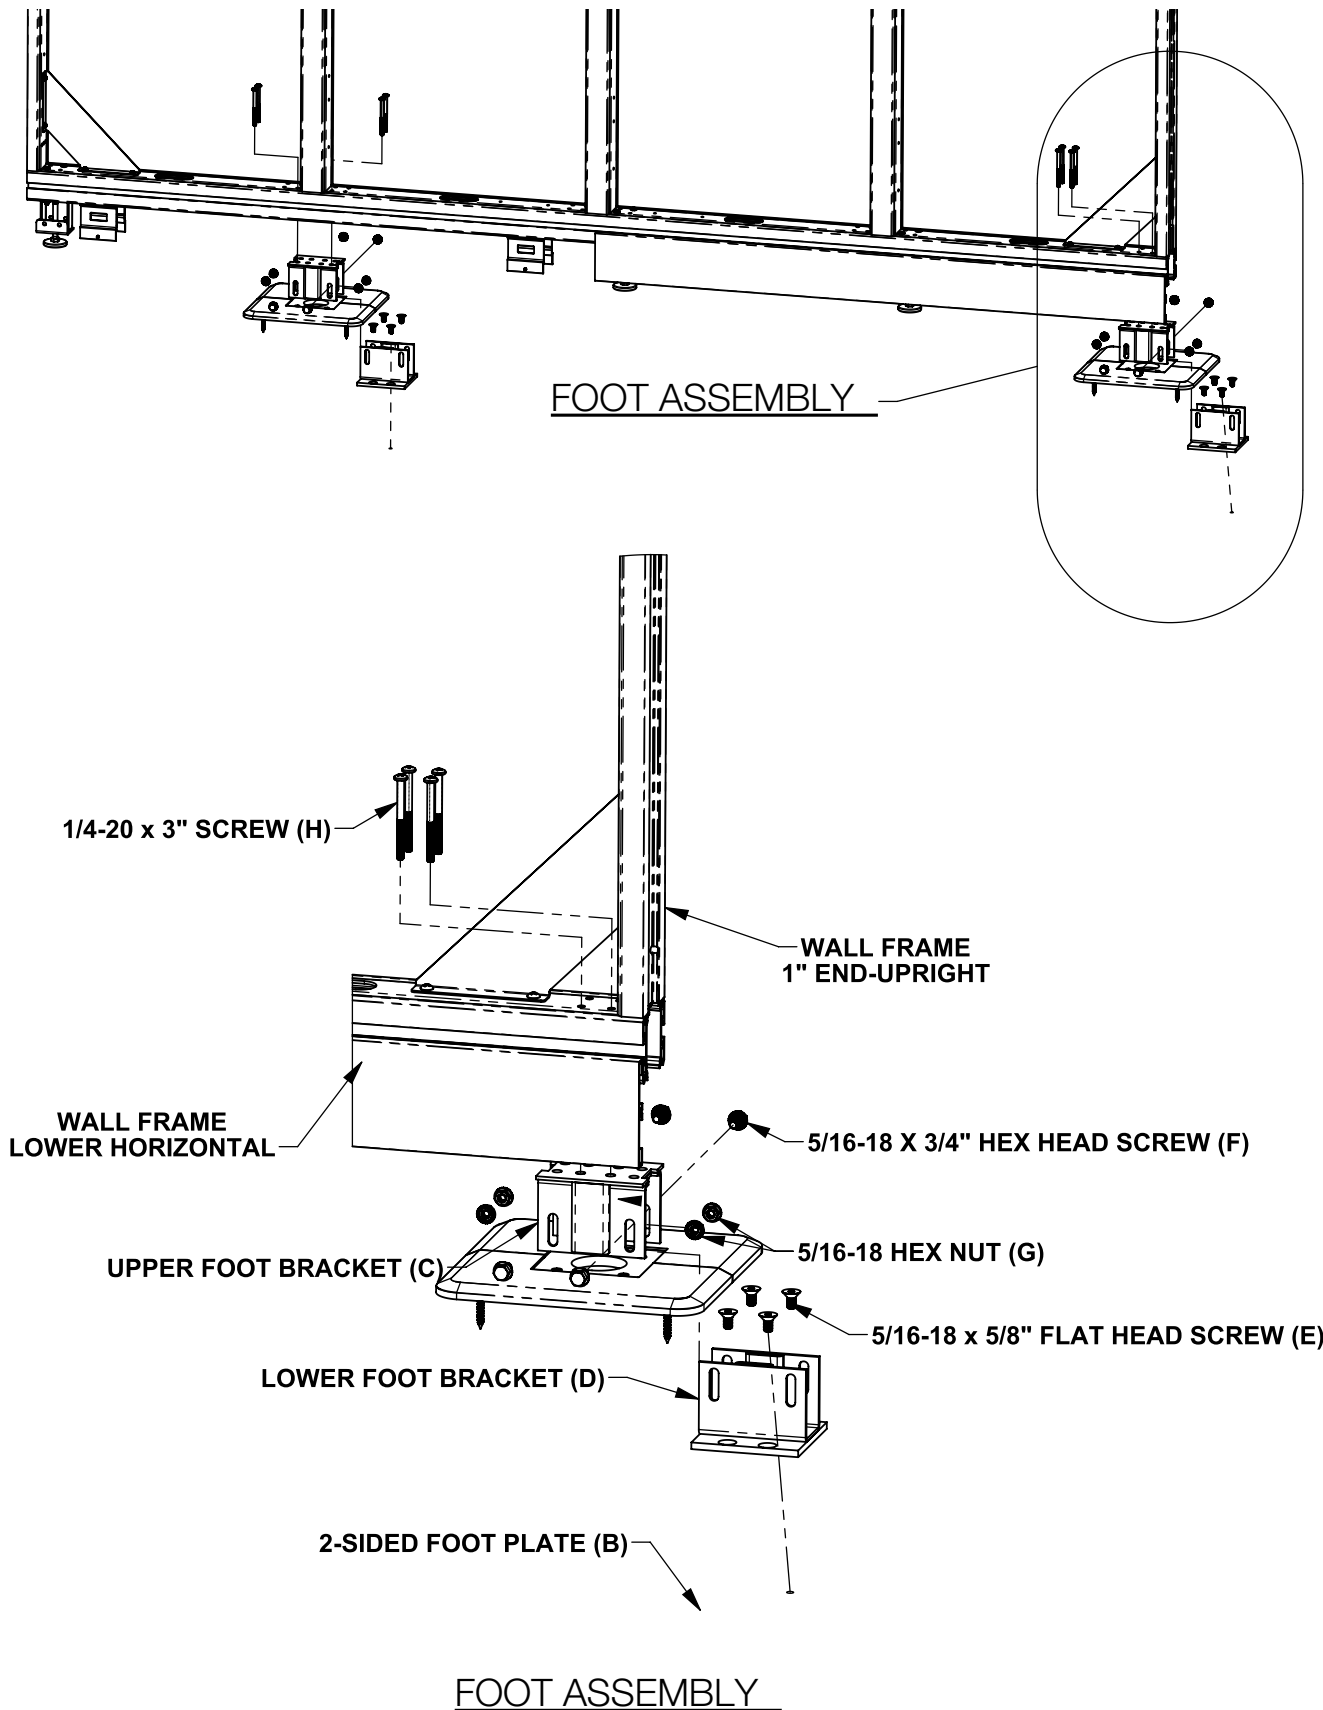










## Rockwell Unscripted® Creative Wall® Install Instructions
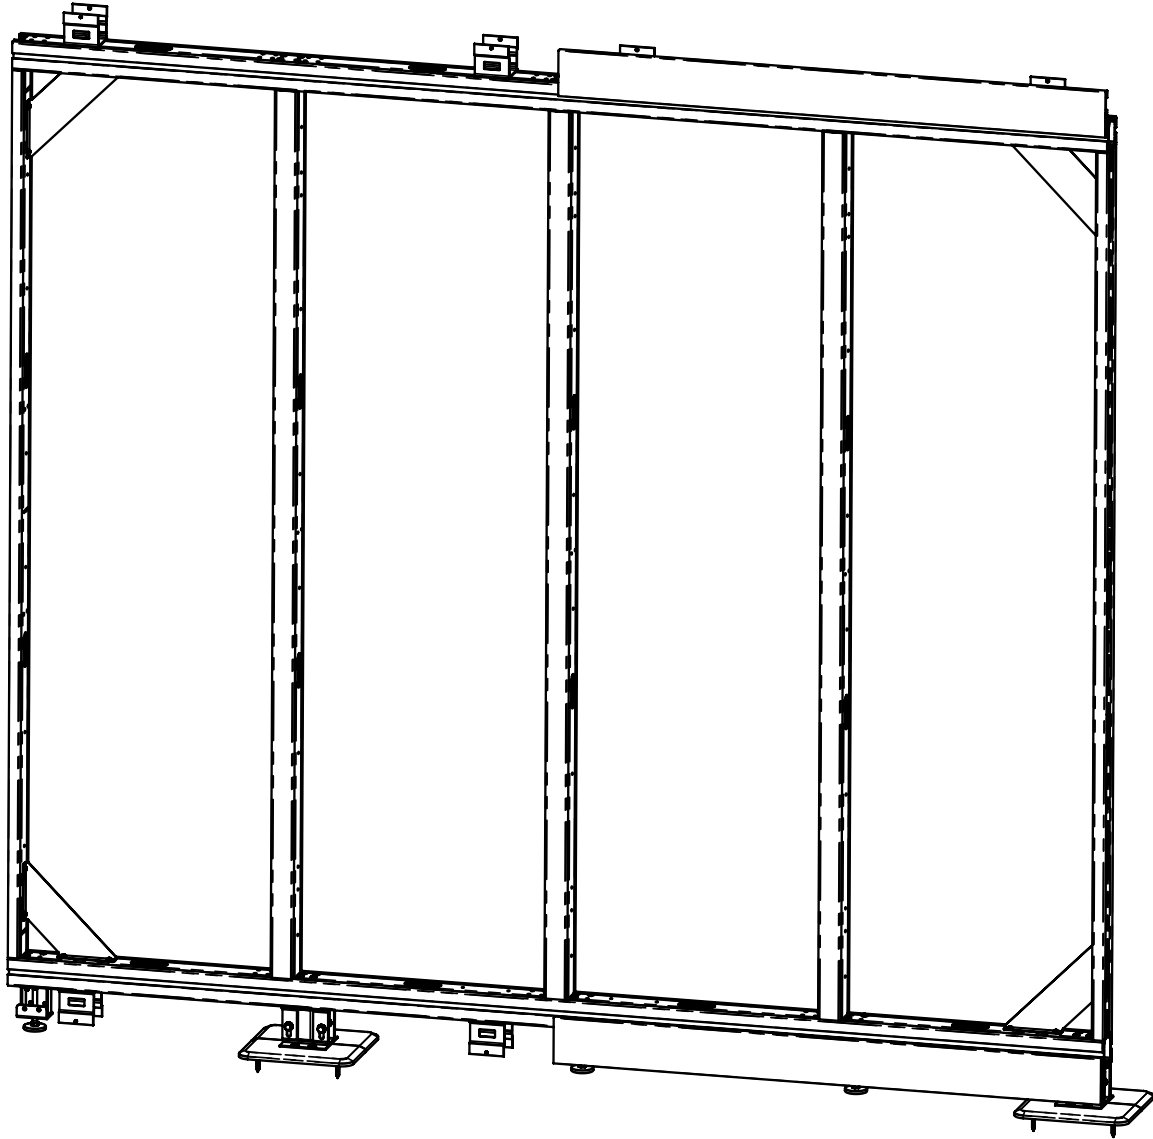
### Square Anchored Foot Plate



# Rockwell Unscripted® Creative Wall® Replacement Parts

## Square Anchored Foot Plate


Description	Reference*	Replacement Pattern Number
Square column floor plate 	6AJ1289	<b>KR6AJ1289</b> <b>HLKR6AJ1289 24-Response</b> Includes: 6AJ1289 - qty 1
Foot plate cover set 	6AJ1290	<b>KR6AJ1290( )</b> Includes: 6AJ1290 - qty 2 (Total required per foot = 1 set)
Foot bracket, upper 	6AJ1296	<b>KR6AJ1296</b> <b>HLKR6AJ1296 24-Response</b> Includes: 6AJ1296 - qty 1
Foot bracket, lower 	6AJ1201	<b>KR6AJ1201</b> <b>HLKR6AJ1201 24-Response</b> Includes: 6AJ1201 - qty 1
Screw, flat head, socket cap, 5/16-18 x .62", black, with lockpatch 	6AJ4094	<b>KR6AJ4094</b> <b>HLKR6AJ4094 24-Response</b> Includes: 6AJ4094 - qty 1 (Total required per assy = 4)
Screw, hex head, serrated flange, 5/16-18 x .62", black 	6AJ1217	<b>KR6AJ1217</b> <b>HLKR6AJ1217 24-Response</b> Includes: 6AJ1217 - qty 1 (Total required per assy = 4)
Hex nut, serrated flange, 5/16-18, zinc 	6AJ4111	<b>KR6AJ4111</b> <b>HLKR6AJ4111 24-Response</b> Includes: 6AJ4111 - qty 1 (Total required per assy = 4)
Screw, pan head phillips drive, 1/4-20 x 3.25", black, with lockpatch 	6AJ4022	<b>KR6AJ4022</b> <b>HLKR6AJ4022 24-Response</b> Includes: 6AJ4022 - qty 1 (Total required per assy = 4)
Double-sided tape strips (pad of 4) 	6AJ4126	<b>KR6AJ4126</b> Includes: 6AJ4126 - qty 1 (pad of 4 strips)

### General Notes

1. "HL" and "ZZ" prefix in pattern number denotes 24-Response. Part will be shipped within 24-hours via ground service, pending availability; quantity limits and higher pricing apply.
2. See the product [Price Lists on www.Knoll.com](http://www.Knoll.com) for material, textile, and finish options denoted by ( ).
3. \* Not offered as an orderable service part number.

# Rockwell Unscripted® Creative Wall® Replacement Parts

## Fixed Fin, Enclosure Fixed Fin, Fin Outriggers









Description	Reference*	Width	Replacement Pattern Number
Fixed fin vertical starter 	6AJ1329		<b>KR6AJ1329( )</b>  <b>Finish options:</b> (111) jet black, (114) folk-stone grey, (115) medium grey, (118) bright white, (120) black brown
Fixed fin top filler rail 	6AJ1328__  6AJ132801( ) 6AJ132802( ) 6AJ132803( ) 6AJ132804( )  6AJ132805( ) 6AJ132806( ) 6AJ132807( ) 6AJ132808( ) 6AJ132809( )  6AJ132810( ) 6AJ132811( ) 6AJ132812( ) 6AJ132813( ) 6AJ132814( )	22" w 24" w 26" w 28" w  30" w 32" w 34" w 36" w 38" w  40" w 42" w 44" w 46" w 48" w	Includes: qty 1  <b>KR6AJ132801( )</b> <b>KR6AJ132802( )</b> <b>KR6AJ132803( )</b> <b>KR6AJ132804( )</b>  <b>KR6AJ132805( )</b> <b>KR6AJ132806( )</b> <b>KR6AJ132807( )</b> <b>KR6AJ132808( )</b> <b>KR6AJ132809( )</b>  <b>KR6AJ132810( )</b> <b>KR6AJ132811( )</b> <b>KR6AJ132812( )</b> <b>KR6AJ132813( )</b> <b>KR6AJ132814( )</b>  <b>Finish options:</b> (111) jet black, (114) folk-stone grey, (115) medium grey, (118) bright white, (120) black brown
Fixed fin glide bracket 	6AJ114202		<b>KR6AJ114202</b> <b>HLKR6AJ114202 24-Response</b> Includes: 6AJ114202 - qty 1
Fixed fin lower wall bracket 	6AJ4088		<b>KR6AJ4088</b> <b>HLKR6AJ4088 24-Response</b> Includes: 6AJ4088 - qty 1
Fixed fin glide, 3" overall nominal height 	5750550		<b>KR5750550</b> <b>ZZKR5750550 24-Response</b> Includes: 5750550 - qty 1 (Total required per assy = 2)
Fixed fin glide block 	6AJ1153		<b>KR6AJ1153</b> <b>HLKR6AJ1153 24-Response</b> Includes: 6AJ1153 - qty 1 (Total required per fin = 2)

### General Notes

1. "HL" and "ZZ" prefix in pattern number denotes 24-Response. Part will be shipped within 24-hours via ground service, pending availability; quantity limits and higher pricing apply.
2. See the product [Price Lists on www.Knoll.com](http://www.Knoll.com) for material, textile, and finish options denoted by ( ).
3. \* Not offered as an orderable service part number.

# Rockwell Unscripted® Creative Wall® Replacement Parts

## Fixed Fin, Enclosure Fixed Fin, Fin Outriggers (cont.)

Description	Reference*	Replacement Pattern Number
Fixed fin lock set 	6AJ4095	<b>KR6AJ4095</b> <b>HLKR6AJ4095 24-Response</b> Includes: 6AJ4095 - qty 2 (Total required per fin = 2)
Spring slot rail nut, 1/4-20, black 	6AJ4024	<b>KR6AJ4024</b> <b>HLKR6AJ4024 24-Response</b> Includes: 6AJ4024 - qty 1 (Total required per fin filler = 2) (Total required per fin starter = 2)
Fix fin starter spacer 	6AJ1330	<b>KR6AJ1330</b> Includes: 6AJ1330 - qty 1
Screw, flat head, socket drive, 1/4-20 x 1.25", black 	6AJ4093	<b>KR6AJ4093</b> <b>HLKR6AJ4093 24-Response</b> Includes: 6AJ4093 - qty 1 (Total required per fin starter = 2)
Screw, flat head, 1/4-20 x 1", black 	7194140	<b>KR7194140</b> Includes: 7194140 - qty 1 (Total required per fin starter = 2)
Rubber D profile extrusion, Rockwell enclosures 	6AJ413701	<b>KR6AJ413701</b> Includes: 6AJ413701 - qty 1
Enclosures fin outrigger end trim extrusion, 4 inch 	6AJ110404()	<b>KR6AJ110404()</b> Includes: 6AJ110404() - qty 1
Enclosures upper end outrigger bracket 	6AJ4144	<b>KR6AJ4144</b> Includes: 6AJ4144 - qty 1









### General Notes

1. "HL" and "ZZ" prefix in pattern number denotes 24-Response. Part will be shipped within 24-hours via ground service, pending availability; quantity limits and higher pricing apply.
2. See the product [Price Lists on www.Knoll.com](http://www.Knoll.com) for material, textile, and finish options denoted by ( ).
3. \* Not offered as an orderable service part number.



# Rockwell Unscripted® Creative Wall® Replacement Parts

## Fixed Fin, Enclosure Fixed Fin, Fin Outriggers (cont.)







Description	Reference*	Replacement Pattern Number
1/4-20 nut plate 	6AJ4053	<b>KR6AJ4053</b> <b>HLKR6AJ4053 24-Response</b> Includes: 6AJ4053 - qty 1
Enclosures fixed fin wall outriggers spacer starter 	6AJ4143	<b>KR6AJ4143</b> Includes: 6AJ4143 - qty 1
Enclosures fixed fin outrigger glide mount assembly with hardware 	6AJ1323	<b>KR6AJ1323</b> Includes: 6AJ4142 - qty 1 (glide bracket weldment) 6AJ4073 - qty 4 (screw, flh #8-32 x .50) 5750550 - qty 1 (glide, 3/8-16)
Enclosure fin wall hardware kit (16 screws) 	6AJ4235	<b>KR6AJ4235</b> Includes: 6AJ4235 - qty 1 (kit of 16 6AJ4234) (screw, flh, self drill #8 x .75)
Screw spacer, fixed outrigger 	6AJ4148	<b>KR6AJ4148</b> Includes: 6AJ4148 - qty 1
Thin head hex bolt 1/4-20 x 1.25 (leveler) 	6AJ4025	<b>KR6AJ4025</b> <b>HLKR6AJ4025 24-Response</b> Includes: 6AJ4025 - qty 1
Screw, pan head phillips drive, 1/4-20 x 3.25", black, with lockpatch 	6AJ4022	<b>KR6AJ4022</b> <b>HLKR6AJ4022 24-Response</b> Includes: 6AJ4022 - qty 1
Screw, hex socket head cap, 1/4-20 x 1.125", with lockpatch 	6AJ4149	<b>KR6AJ4149</b> <b>HLKR6AJ4149 24-Response</b> Includes: 6AJ4149 - qty 1

### General Notes

1. "HL" and "ZZ" prefix in pattern number denotes 24-Response. Part will be shipped within 24-hours via ground service, pending availability; quantity limits and higher pricing apply.
2. See the product [Price Lists on www.Knoll.com](http://www.Knoll.com) for material, textile, and finish options denoted by ( ).
3. \* Not offered as an orderable service part number.

# Rockwell Unscripted® Creative Wall® Replacement Parts

## Fixed Fin, Enclosure Fixed Fin, Fin Outriggers (cont.)

Description	Reference*	Replacement Pattern Number
Screw, flat head, socket drive, 1/4-20 x .875", black 	6AJ4096	<b>KR6AJ4096</b> <b>HLKR6AJ4096 24-Response</b> Includes: 6AJ4096 - qty 1 (Total required per fin = 2)
Screw, button head, socket cap, 1/4-20 x .5", black, with lockpatch 	6AJ4039	<b>KR6AJ4039</b> <b>HLKR6AJ4039 24-Response</b> Includes: 6AJ4039 - qty 1 (Total required per fin = 6)
Screw, undercut flat head, phillips drive, 1/4-20 x .75", black, with lockpatch 	6AJ1231	<b>KR6AJ1231</b> <b>HLKR6AJ1231 24-Response</b> Includes: 6AJ1231 - qty 1
Set screw, dog point, 1/4-20 x .5", black, with lockpatch 	6AJ4097	<b>KR6AJ4097</b> <b>HLKR6AJ4097 24-Response</b> Includes: 6AJ4097 - qty 1 (Total required per fin = 2)
Screw, hex head, 1/4-20 x .75", Zinc 	6AJ4089	<b>KR6AJ4089</b> <b>HLKR6AJ4089 24-Response</b> Includes: 6AJ4089 - qty 1
Fin filler assembly hardware kit 	6AJ4024 6AJ4095 6AJ4096 6AJ4039 6AJ4097	<b>KR6AJ0069HWKIT</b> <b>HLKR6AJ0069HWKIT 24-Response</b> Includes: 6AJ4024 - qty 2 - (spring nut) 6AJ4095 - qty 2 - (lock) 6AJ4096 - qty 2 - (scr, flh) 6AJ4039 - qty 6 - (scr, btnhd) 6AJ4097 - qty 2 - (set screw)

### General Notes

1. "HL" and "ZZ" prefix in pattern number denotes 24-Response. Part will be shipped within 24-hours via ground service, pending availability; quantity limits and higher pricing apply.
2. See the product [Price Lists on www.Knoll.com](http://www.Knoll.com) for material, textile, and finish options denoted by ( ).
3. \* Not offered as an orderable service part number.