

Stromborg Rectangular Tables w/ Glass Top

Pattern numbers represented:

DS14-G2, DS16-G2




F. #10 Phillips truss head screw



G. 5/16-18 Hex drive soc cap screw


Parts List:

- A. 1x Table top
- B. 4x Leg Assembly
- C. 1x Long cross rail
- D. 2x Y-casting
- E. 4x Outdoor glide (*not used for glass top tables*)
- F. 4x #10 Philips truss head screw (*not used for glass top tables*)
- G. 12x 5/16-18 Hex drive soc cap screw
- H. 6x 1/4-20 Phillips truss head screw
- I. 6x Rubber washer
- J. 6x 1/4" Washer
- K. 4x Indoor glide



H. 1/4-20 Phillips truss head screw

Exploded View

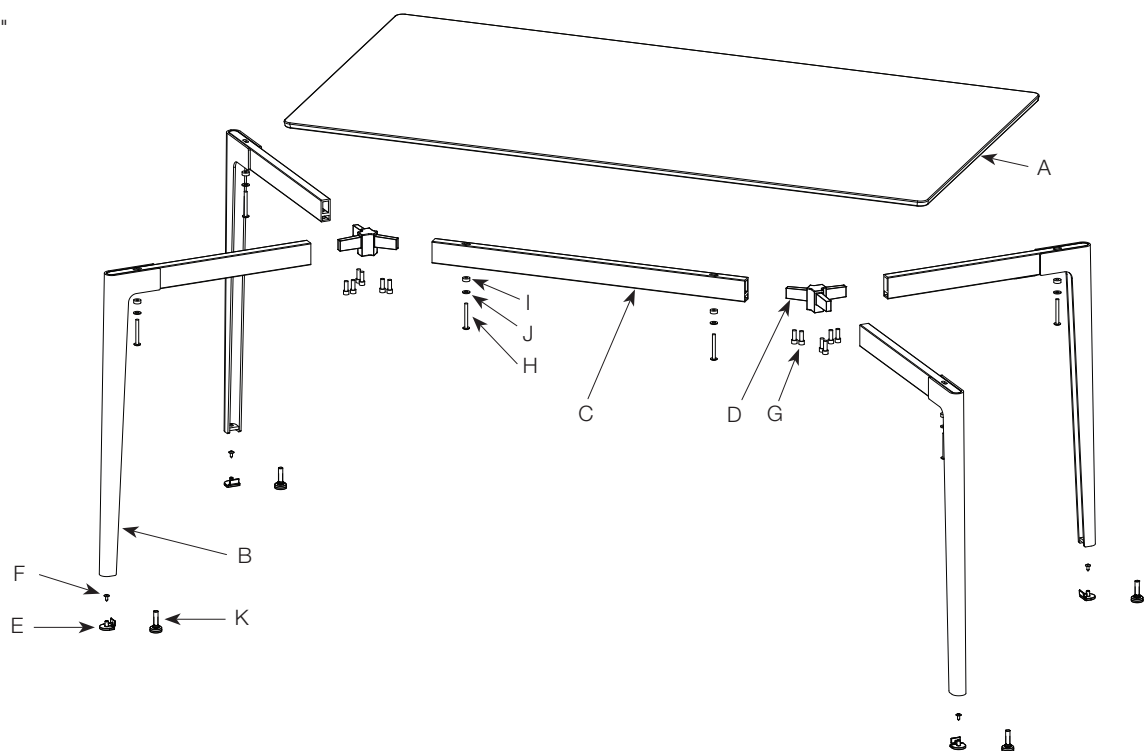

DISASSEMBLY FOR RECYCLING

Materials Identification and Segregation:

Where possible plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non-marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.

To disassemble product, reverse the above installation steps.

Stromborg Rectangular Tables w/ Glass Top, continued

STEPS

Note: *Glass top tables are for indoor use only and require indoor glides.* Leg assemblies (B) will arrive with outdoor glides (E) installed as seen in Fig 1. Please follow below instructions to change glides.

1. Remove #10 Phillips truss head screws (F) and outdoor glides (E) and replace with indoor glides (K). See Fig 2.

Fig 1


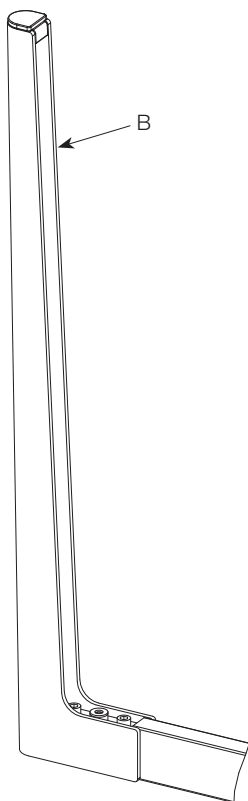



Fig 2

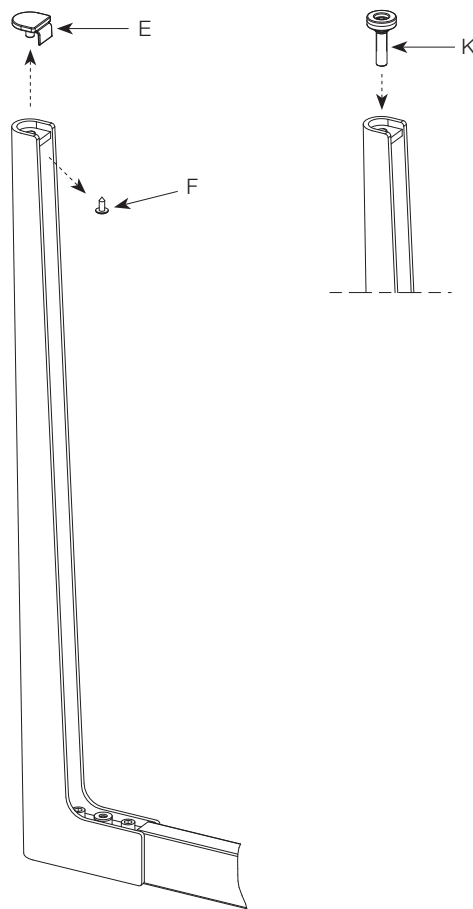

Stromborg Rectangular Tables w/ Glass Top, continued

STEPS

2. Attach long cross rail (C) to Y castings (D) using screws (G) and 1/4" allen wrench.




G. 5/16-18 Hex drive soc cap screw

3. Next, attach leg assemblies (B) to Y-castings (D) using screws (G) and 1/4" allen wrench.

Note: Do not tighten screws. Keep screws loose for final adjustment.


Fig 3

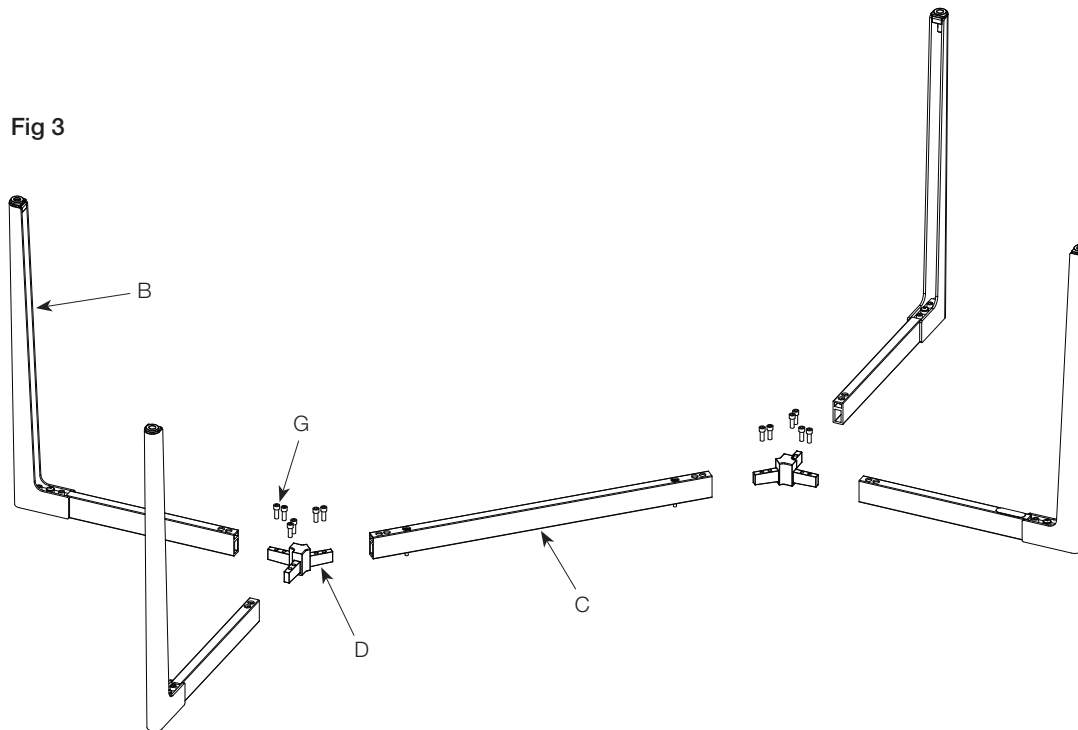

Stromborg Rectangular Tables w/ Glass Top, continued

STEPS

4. Attach leg assembly to top using washers (I), washers (J), and screws (H). See Fig 4 & 5. Tighten screws to 40 in/lbs torque.



H. 1/4-20 Phillips truss head screw

5. Align table top corner to top of leg as seen in Fig 6. Tighten screws (H) on Y casting to 80 in/lbs torque.

Note: Ensure screws are fully seated. The top of screw head should be ~ 3/16" below bottom of cross rail. Failure to fully seat screws could result in unstable table.

Fig 4

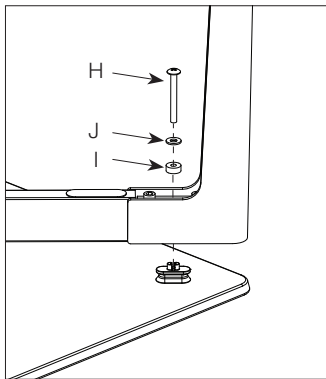


Fig 5

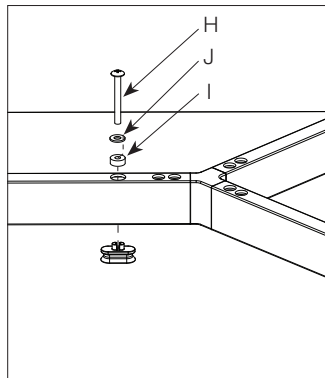


Fig 6

