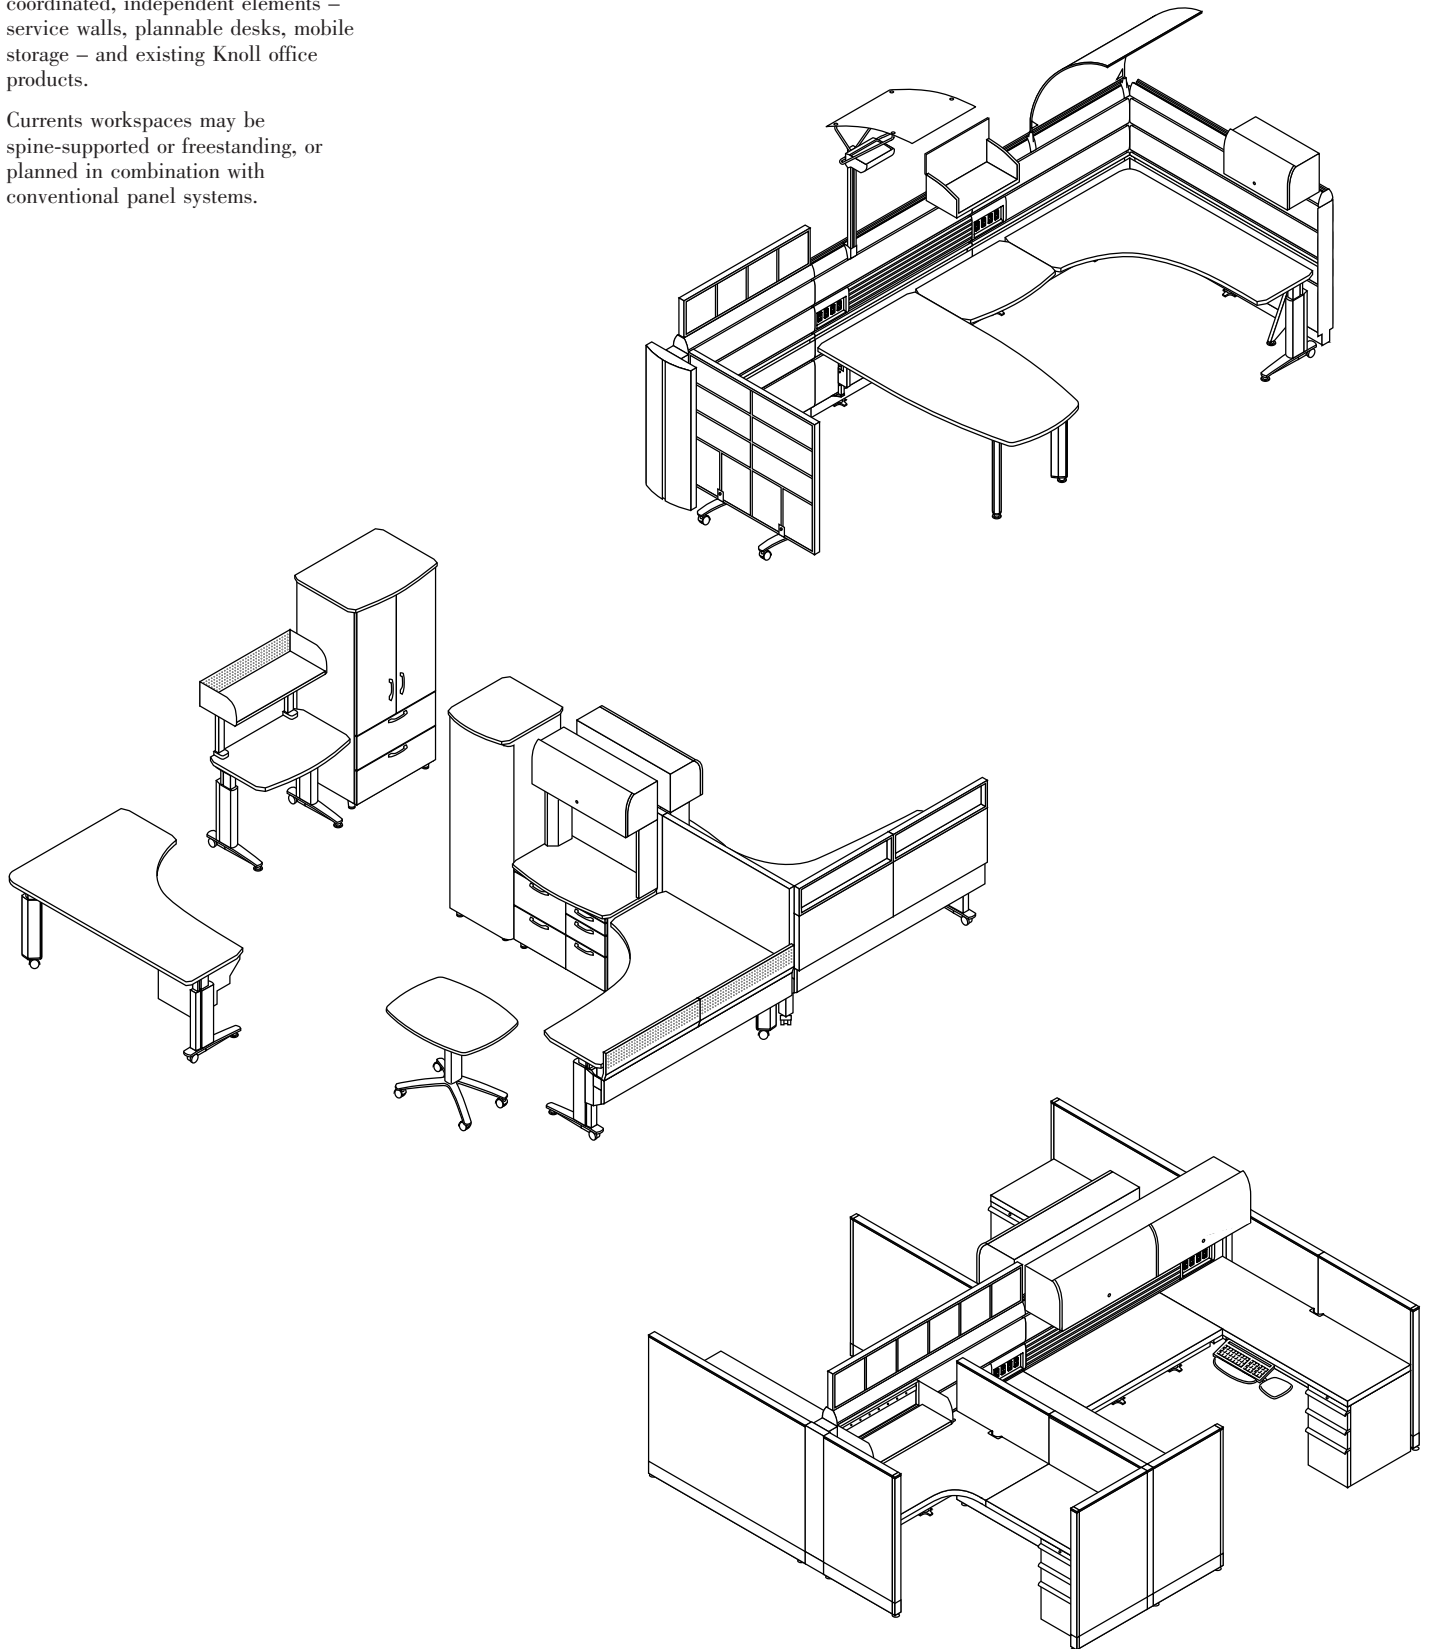


Introduction	Introduction to Currents	2
	Currents	5
	Knoll Color Program	6
	Currents Legacy Finishes	7
Service walls and components	Service wall frames	8
	Fence frames	9
	Crown and raceway covers	10
	Structural base cover kits	11
	Access covers	13
	Wall ends and connectors	20
	Wall frame accessories	25
	Panel system starters and T-ends	28
Worksurfaces	Service wall power components	36
	Worksurfaces, universal	44
	Currents worksurfaces for Morrison	50
	Cascade edge worksurfaces	56
Screens	Worksurface supports	63
	Add-up panels	65
	Add-up panel connectors and fillers	67
	Stackable add-up panels	69
	Stackable add-up connectors and fillers	73
	Linkable screens	78
	Wall-connected screens	85
	Mobile screens	86
Wall-mounted storage and lighting	Crown-mounted screens	87
	Crown-mounted storage	88
	Reuter open overhead	89
	Reuter open shelf	90
	Reuter overhead cabinet	91
	Reuter ganging bracket	92
	Task lights for Reuter overhead storage	93
	Overhead brackets	94
Floorstanding storage	Ambient lighting	95
	Pedestals	96
	Pedestal accessories	98
Worktables, desks and credenzas	Vertical storage cabinets	101
	Worktables	103
	Desks	106
	Desks with service beam	114
	Basic credenzas	122
	Credenzas	125
	Credenzas with service beam	127
	Service beams for desks or credenzas	129
	Above-desk storage	131
	Desk and credenza accessories	132
	Power components for desks and credenzas	133
Alpha-Numeric Index	Power monument	137
	Privacy screens for desks and credenzas	138
	General Ordering Information	150

Currents creates dynamic, advanced performance work environments from coordinated, independent elements – service walls, plannable desks, mobile storage – and existing Knoll office products.

Currents workspaces may be spine-supported or freestanding, or planned in combination with conventional panel systems.



### Currents service walls

Currents service walls form the structural core and primary path of services distribution for a cluster of workstations. Currents service walls may also create borders for team workspaces, conference areas, or corridors. Service walls are 5" thick, and available in three heights: 43" (nominal 39"), for seated visual access; 52" (nominal 48") for seated privacy, the most versatile height for open plan areas requiring some overhead storage; and 68" (nominal 64"), for standing privacy in executive or conference areas.

Service walls are composed of frames and covers. Frames include studs on 12" centers, base raceway with levelling glides, crown and base. All studs have brackets to support covers at 5", 21", 30", 39", 48" and 64" above the floor. Crown and raceway covers, structural base covers from 5" to 21" above the floor, and covers above 21" must be specified separately.

Structural base covers enable perpendicular panels, worksurface supports, or outriggers to be attached at any point. Structural base covers may be painted steel, perforated, or upholstered.

Wall covers above 21" snap into wall frame brackets at 12" intervals, and are removable without tools. Covers may be painted, upholstered, acoustical/tackable upholstered, cable tray, slatwall, or marker surface.

Currents walls plan in any combination of 48", 60" or 72" widths corresponding to the total length of wall required. Add stabilizer end cabinet, outriggers, T-end and L-end panels, or 90° post connections at each end of service wall spine. Straight connectors are included with each frame kit to join frames of the same height in a straight line. High-low straight connectors are available separately. Service wall spines require outriggers or perpendicular systems panels every 8'.

Power components are specified separately. Knoll universal 2+2 or 3+3 power components may be installed in the base of the wall or at worksurface height. Base power rails accept two duplex outlets on each side of a panel at raceway height. Desk-height outlet modules accept two duplex outlets on each face above or below the worksurface. One or two modules (four duplex outlets each side) may be located in any 12" wide stud bay. Locate outlet modules and related 12"W outlet covers before specifying widths of adjacent panel covers.

The interior of the wall between 21" and the crown offers unobstructed, 1" deep, lay-in cabling on each surface. Vertical wire management and excess cord capability is unobstructed 2 1/2" x 10" between studs.

All service walls have a 4"H crown for mounting shelves and overhead storage cabinets, canopy lighting and awnings at any point on one or both sides. Translucent, perforated or upholstered add-up panels fit into a center channel anywhere along the crown for 12", 21" or 28" of additional enclosure.

Stackable add-up panels are also available in translucent, perforated, upholstered, marker or glazed surface. First up panels are 12", 21" or 28" high; next up stacking panels are 16" high.

First up panels can be mounted on any 3" increment along service wall crown, or correspond in width to linkable screens.

### Wall mounted components

Worksurface supports, perpendicular wall-connected linkable screens, and systems panels may be connected to the Currents wall at any point. Wall-connected screens, linkable screens and systems panels attach to the service wall at any point. Mobile screens are also available, in translucent fiberglass, perforated or upholstered surface.

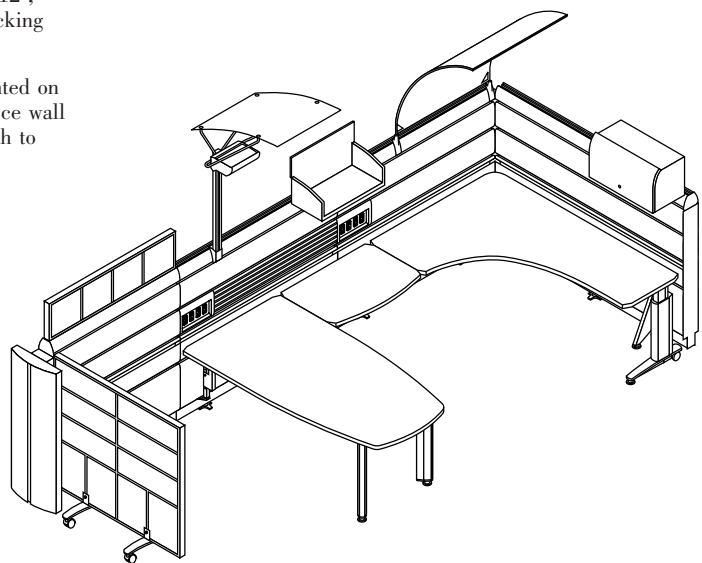
Currents linkable screens, in translucent, perforated, glazed or upholstered surface, define workstations and extend the service wall horizon. Linkable screens connect in straight, L, T and X configurations and accept stackable add-up panels. First up panels are 16", 25" or 32"H. Next up panels are 16"H.

Currents worksurfaces are designed for computer use as the primary work activity. Deep corners are shaped for large monitors, and include wide keyboard/mouse areas. Straight worksurfaces feature softly curved or flat fronts. Extended corners incorporate an adjacent work area and a computer corner into a single, uninterrupted surface. Universal worksurfaces include a steel stiffener for high load capacity and cord management.

Service walls cantilever worksurfaces up to 24"D, or provide end support for any size worksurface. Support columns, independent C-legs, and floorstanding pedestals are also available for worksurface support. Cantilevers are adjustable in 1" increments for 24"-34"H worksurface. End support brackets and C-legs are fixed height for 28"H worksurface, or adjust for 24"-34" worksurface height.

Service wall crowns can upmount portable open shelves, task and ambient lighting, add-up panels, and awnings for light control.

Service wall crowns can upmount or downmount Reuter overhead storage and open shelves at any point. Brackets are also available to downmount Morrison Options or Equity overhead cabinets from 64" service wall crown.



### Currents desks and credenzas

Currents desks and credenzas are freestanding furniture elements optimized for the high-mobility, computer-based office. Currents corner desks and credenzas can work together to form efficient, two-element workstations.

They are available in basic versions for use with Currents service walls and screens, or equipped with service beams to support privacy screens, modular power distribution, and expanded data cabling. Desk and credenza beams can be linked in powered clusters. Beam-mounted privacy screens may be shared back-to-back; both sides are tackable. Upholstered screen heights reach 39" or 48" horizons. 9"H translucent windows can be added to either height. Perforated metal screens to 30"H conceal desktop cables on open desks.

All desks include horizontal and vertical cable managers. Optional service beam may be powered with Knoll 2+2 or 3+3 modular power components, and carries up to 50 lay-in Category 5 cables. Data cabling can be protected by optional data tray covers. Standard knockouts are provided at each end of the data tray for Knoll PDC Module data connector plates.

All Currents desks are height-adjustable. Pin-set version has range of 24" to 30"H in 1" increments. Handcrank version lets the user adjust continuously from 24" to 34"H. Desks have C-legs for knee clearance, and have interchangeable rear casters or glides for easy mobility.

Desks are available in corner, extended corner, and curved-front straight shapes. Worksurface corners are eased to make alignment of mobile units less critical.

Desks, credenzas, and wall-mounted worksurfaces accept clamp-on workshelves. Workshelves provide convenient binder/book access adjacent to computer displays.

Credenzas are integrated units which provide the equivalent of one or two pedestals, enclosed shelf storage, and a worksurface top that extends the usable desk top area. A cable storage area is provided at the rear of the credenza cabinet, accessed by sliding the worksurface forward. Optional linkable service beam accepts privacy screens and extends the wireway capabilities. Credenzas accept clamp-on workshelves or stanchion-mounted Reuter overhead storage units.

Stanchions can be equipped with outlet modules that link to adjacent desks.

### Currents Worktables

Currents mobile worktables extend the worksurface area and provide flexible guest/conference spaces. Rounded corners enable informal placement near other worksurfaces. All worktables are available with casters or levelling glides.

Adjustable height worktables adjust from 24" to 30" high in 1" increments.

### Currents Storage

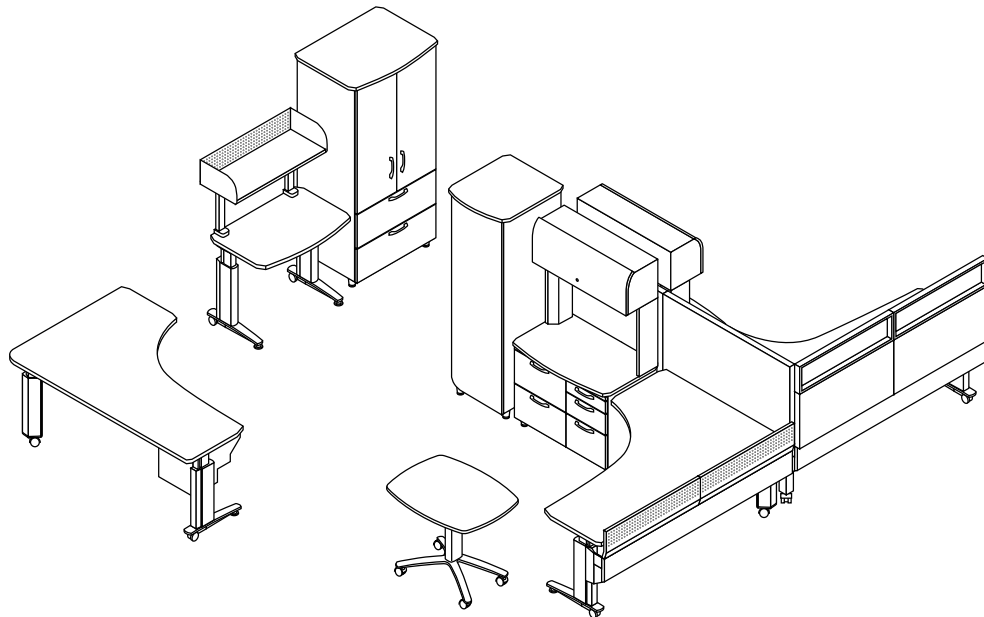
Currents freestanding storage components are designed for mobility and space efficiency.

Pedestals are available mobile or fixed, with 2 files or combination 4" personal, 7" data, and 11" file drawer fronts, fitting below standard 28" worksurface height. Data/file mobile pedestals are low enough to roll under desks set lower than 28". Mobile pedestals include top, casters and handle. Fixed pedestals include 2" levelling glides.

Vertical storage units are compact towers, 24" or 30" wide, 64" high, on casters or glides. Cabinets have all shelves or full width files at the bottom and adjustable shelves above, or full width coat bar.

Reuter vertical storage has a rotating door, shelves and pull-out file frames, and a wardrobe area. Reuter storage is 21" wide so open door fits within 24" planning footprint.

Reuter vertical storage is available 48"H, with painted or worksurface top, or 64"H with painted top only.



---

**Approved for wall covers, mobile screens and privacy screens.**

*Fabric Group 10*

Bailey II (W359)  
Foundation (W351)  
Growth Spurt (W692)  
Newbury (W812)  
Symbolic Details (W693)  
Versatility (W432)

*Fabric Group 15*

Belgrade (W256)  
Marche (W321)  
Regency/Fairfield (W210/B)  
Visage (W320)

*Fabric Group 20*

Banyan (W443)  
Bauhaus Block (W296)  
Boardwalk (W911)  
Boulevard (W912)  
Clarity (W281)  
Criss Cross (W305)  
Devon (W809)  
Frequency (W340)  
Labyrinth (W352)  
Litchfield (W808)  
Melbourne (W228)  
Playa (W422)  
Outback (W229)  
Reflect (W884)  
Resolution (W280)  
Saratoga (W807)  
Walkabout (W230)  
Weave Three (W298)

*Fabric Group 30*

Basket Draft (W249)  
Crescent (W408)  
Elan (W444)  
Flow (W565)  
Freehand (W388)  
Harmony (W232)  
Palmetto (W395)  
Peano (W234)  
Progression (W403)  
Progression Striae (W463)  
Promenade (W913)  
Raku Cloth (W566)  
Walls of Rain (W923)

*Fabric Group 35*

Saxony Plus (S)

*Fabric Group 40*

Analogy (K614)  
Bardo (W284)  
Boxstep (W325)  
Chimes (W285)  
Eurythmic (W268)  
Foil Rap (W535)  
Freefall (W922)  
Metaphor (K612)  
Sennit (W337)  
Spinoff Nuance (W319)

*Fabric Group 45*

Backdrop (W302) \*  
Casual Elegance (W920)  
Dristi (K872) with backing only  
Fast Forward (W301)\*

*Fabric Group 50*

Jump Rope Poly  
Mesh Poly

*Fabric Group 55*

Transition

Additional textiles are available on linkable screens and stackable add-up panels: see Morrison price list for approved fabrics.

Customer's Own Material is subject to an application and UL testing fee of \$2500 per fabric. Fabric requirements - application test, 10 yards; UL test, 15 yards. COM is also subject to extended leadtimes. COM panels are priced at Group 10 plus cost of fabric.

Please consult your Knoll representative for fabrics available for pedestal seat cushions.

**Core finishes**

Specify Core finishes for all new customers

Core	Legacy	Wall covers	Wall ends, trim, brackets and outriggers	Storage fronts	Storage cases	Work-surfaces and shelves	Pedestals and Reuter Overhead
611	Beige Mist Metallic	•	•	•	•		P2
118	Bright White	•	•	•	•	•	P3
112	Brown	•	•	•	•		P1
113	Dark Grey	Y3	•	•	•		P1
114	Folkstone Grey	LA	•	•	•	•	P1
111	Jet Black		•	•	•	•	P1
115	Medium Grey	Y2	•	•	•		P1
612	Medium Metallic Grey	J	•	•	•		P2
119	Pumice	F				•	
116	Sandstone		•	•	•		P1
613	Silver	3	•	•	•		P3
117	Soft Grey	E/M42	•	•	•	•	P1
	Maple Techgrain®	V2		M		4	M
	Cherry Techgrain®	V2		R		6	R
	Medium brown mahogany Techgrain®	V2		I		7	I
	Medium red mahogany Techgrain®	V2		C		8	C
	American cherry Techgrain®	V2		P		9	P
	Maple	V3		K		K	K
	American cherry	V3		X		X	X
	Medium red mahogany	V3		Z		Z	Z

**Default trim information:**

**Trim Grey** is the integral color for worksurface, desk, credenza and worktable top edge, mobile screens, linkable screen and add-up panel trim, privacy screen and window trim, pedestal pulls and awning brackets.

**Black:** wall frames and drawers interior, wall, screen, storage glides and casters,

**Light grey:** perforated add-up panels and ambient lights

**Translucent crystal:** fiberglass surfaces for mobile screens, linkable screens and add-up panels

		Work-surfaces	Wall and Structural Base covers	Crown Covers	Crown end caps, connectors and connector top caps, raceway covers, worksurface brackets and outriggers	Straight legs, C-legs, corner legs, desk screen clamps, window frames (textured only)	Storage fronts	Storage Cases
Plastic Laminates	Light Grey	L						
	Pumice	F						
	Winter grey	V						
	Slate	S						
	Snow	B						
	Folkstone Grey	U						
	Pearwood	PA						
	Fiber	E						
	Sand	D						
	Medium Grey	G						
	Soft grey	M42						
Wood Grain Laminates	Clear Maple	CM						
Veneer Group 2	Maple Techgrain®	4					M	
	Cherry Techgrain®	6					R	
	Medium brown mahogany Techgrain®	7					I	
	Medium red mahogany Techgrain®	8					C	
	American cherry Techgrain®	9					P	
Veneer Group 3	Maple	K					K	
	American cherry	X					X	
	Medium red mahogany	Z					Z	
Paint Group 2	Metallic Flint *		2	2	2	2	2	2
	Light metallic grey *		U	U	U	U	U	U
	Medium metallic grey *		J	J	J	J	J	J
	Dark metallic grey *		V	V	V	V	V	V
	Light metallic tan *		W	W	W	W	W	W
	Metallic beige *		H	H	H	H	H	H
	Soft Grey *		E	E	E			
	Medium Grey (Slate) *		Y2	Y2	Y2			
	Taupe *		R	R	R			
	Aluminum			A				
Paint Group 3	Silver *		3	3	3	3	3	3
	White *		B	B	B	B	B	B

Specify legacy finishes to match existing product only. Legacy finishes are not available for new customers.

Trim grey is the integral color for worksurface, desk, credenza and worktable top edge, mobile screen and add-up panel trim, privacy screen and window trim, pedestal pulls and awning brackets

Trim grey (5) and Black (N) are the contrasting integral colors for Currents worksurfaces for Morrison.

Light grey (L) and Pumice (F) are the plastic laminates with matching integral trim colors for Currents worksurfaces for Morrison


Wall, screen and storage glides, glide cones and casters are integral color Black.

Wall frames and pedestal drawer interiors are painted Black.

Perforated add-up panels and ambient lights are painted Light grey




Fiberglass surfaces for mobile screens, linkable screens and add-up panels is Translucent crystal

Linkable screen feet are painted Trim grey

description	type	w	d	h	pattern no.	black
	39"H	48"	5"	43"	<b>APF1 3948</b>	\$398.
		60"	5"	43"	<b>APF1 3960</b>	458.
		72"	5"	43"	<b>APF1 3972</b>	567.
	48"H	48"	5"	52"	<b>APF1 4848</b>	438.
		60"	5"	52"	<b>APF1 4860</b>	502.
		72"	5"	52"	<b>APF1 4872</b>	626.
	64"H	48"	5"	68"	<b>APF1 6448</b>	522.
		60"	5"	68"	<b>APF1 6460</b>	597.
		72"	5"	68"	<b>APF1 6472</b>	747.

Order Code	Specification Information	Application Notes
Example: <b>APF1 4860</b>	Wall frame pattern numbers begin with APF prefix.	Service wall frames are the structural component of a Currents spine. Specify frames in any combination of widths to create the overall wall length required.
<b>APF1</b> Wall frame		Crown is bored to accept stackable add-up panels at 3" increments.
<b>48</b> Height	<i>Specify:</i> <i>Fifth position: height</i>	Wall frames include two levelling feet with 2" travel, 12" from each side edge.
<b>60</b> Width	39 39"H 48 48"H 64 64"H  <i>Seventh position: width</i> 48 48"W 60 60"W 72 72"W	The base of the wall accepts Knoll 2 + 2 or 3 + 3 raceway power rails, and allows cables to enter or exit anywhere between glides.
	All wall frames include 3" diameter, 2" levelling glides and one set of connectors to adjacent frame or wall connector. Frames are black painted finish.	Specify crown covers, raceway covers, structural base covers, and wall covers for each face of frame, and specify power components separately.



description	width	depth	height	pattern number	black
Fence frames (legs not included) 	48"	5"	20 1/2"	<b>APF 1848</b>	\$395.
	60"	5"	20 1/2"	<b>APF 1860</b>	472.
	72"	5"	20 1/2"	<b>APF 1872</b>	567.
Leg with glide 	2 3/4"	4"	18 1/2"	<b>AX1 LEG ( )</b>	56.
Stabilizer feet (set of 2) 	2 1/2"	7 1/2"	4 1/2"	<b>AX1 FF ( )</b>	90.

**Order Code**

Example: <b>APF 1872</b>
<b>APF</b> Wall frame
<b>18</b> Height
<b>72</b> Width

**Specification Information**

*Specify painted finishes for legs and feet.*

Fence frames include four barrel connectors, crown and bottom rail covers in trim grey. Frames must be enclosed with two rows of 9"H Currents wall covers on each face.

Specify Currents power components separately. Outlet modules mount at any point along the top row only.

**Application Notes**

Currents Fence provides independent services distribution to a cluster of tables, desks or workstations.

Installed Fence frames are 40"H and include vertical studs with cover mounting clips and cable manager inserts every 12".



A continuous top channel accepts Currents crown top caps and supports panes, add up panels or stackable add up panels 12" high. 21"H stackable add up panels may be used on Fence runs supported by perpendicular panels or linkable screens.

Fence legs with glides mount 12" from each frame side edge under the first full vertical stud. Stabilizer feet mount on both faces of Fence legs.

For freestanding Fence runs, specify a leg with feet 12" from each run end plus a leg with feet for each intermediate frame connection. Intermediate legs may be positioned on either side of the frame connection.

Legs with feet 12" from each end of connected Fence frames can be replaced by stabilizer end cabinets or T-ends with panels or linkable screens. Intermediate support may also be provided by legs without feet in combination with perpendicular panels or linkable screens with Fence panel starters.


Fence frames can end support worksurfaces but cannot cantilever worksurfaces or upmounted storage.

description	type	w	d	h	pattern no.	paint	metal finish (A)	no outlets	outlets
Crown covers (pair) 		48"	5"	4"	<b>APT 48 ( )</b>	\$25.	\$30.		
		60"	5"	4"	<b>APT 60 ( )</b>	30.	34.		
		72"	5"	4"	<b>APT 72 ( )</b>	34.	40.		
Raceway covers (pair) 	no outlets	48"	–	2 1/2"	<b>APR 480 ( )</b>			25.	
		60"	–	2 1/2"	<b>APR 600 ( )</b>			30.	
		72"	–	2 1/2"	<b>APR 720 ( )</b>			34.	
	outlets	48"	–	2 1/2"	<b>APR 48 ( )( )</b>				30.
		60"	–	2 1/2"	<b>APR 60 ( )( )</b>				34.
		72"	–	2 1/2"	<b>APR 72 ( )( )</b>				40.

Order Code	Specification Information	Application Notes
Example: <b>APR 480 612</b> <b>APR</b> Raceway <b>48</b> Width <b>0</b> Outlet openings <b>612</b> Finish	Wall crown pattern numbers begin with APT-prefix, then frame width.  Specify: Sixth position: paint or metal finish  Raceway Covers begin with APR-prefix, then frame width.  Specify: Sixth position: outlet openings 0 no outlets 2 two outlets, each side (48", 60" only) 4 four outlets, each side 6 six outlets (72" only), each side  Seventh position: Raceway cover finish	Crown, raceway, and structural base covers are required for every wall frame in corresponding widths. Covers are specified in pairs to cover both sides of a frame.  Raceway covers may be specified with no openings (desk-height raceway), two openings in the center, or four outlets at all possible locations in 48" or 60"W raceway. 72"W raceway may have four outlet openings in the center or six in all, each side.  Raceway cover sets with outlet openings include black filler plates for one cover only.

# Structural base cover kits *non-upholstered*

description	type	w	d	h	pattern no.	smooth solid	textured solid	perforated	textured perforated
Structural base covers (pair)	non upholstered	48"	1"	16"	<b>APC AZ48 ( ) ( )</b>	\$189.	\$209.	\$268.	\$295.
		60"	1"	16"	<b>APC AZ60 ( ) ( )</b>	218.	242.	308.	340.
		72"	1"	16"	<b>APC AZ72 ( ) ( )</b>	249.	274.	348.	383.



### Order Code

Example:	<b>APC AZ48 H 612</b>
<b>APC</b>	Wall cover
<b>AZ</b>	Attachment zone
<b>48</b>	Width
<b>H</b>	Perforated
<b>612</b>	Finish

### Specification Information

Structural base cover kit pattern numbers begin with APC AZ prefix, then cover width.

*Specify:*  
*Eighth position:*

P painted  
H perforated painted  
*Ninth position:* paint finish or fabric group

*Specify paint finish for all covers: Textured paint finishes for structural base covers only:*


### Application Notes

Crown, raceway, and structural base covers are required for every wall frame in corresponding widths. Covers are specified in pairs to cover both sides of a frame.

Structural base covers bolt to each side of the wall frame up to 21"H for structure and continuous attachment capability.

# Structural base cover kits *upholstered*

description	type	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
Structural base covers (pair)	upholstered	48"	1"	16"	<b>APC AZ48 F ( )</b>	\$272.	\$283.	\$292.	\$313.	\$321.	\$332.	\$342.	\$360.	\$381.
		60"	1"	16"	<b>APC AZ60 F ( )</b>	321.	332.	344.	367.	379.	389.	401.	421.	448.
		72"	1"	16"	<b>APC AZ72 F ( )</b>	n/a	381.	n/a	n/a	n/a	n/a	n/a	n/a	n/a



### Order Code

Example:	<b>APC AZ48 F 10</b>
<b>APC</b>	Wall cover
<b>AZ</b>	Attachment zone
<b>48</b>	Width
<b>F</b>	Upholstered
<b>10</b>	Fabric

### Specification Information

Structural base cover kit pattern numbers begin with APC AZ prefix, then cover width.

*Specify:*  
*Eighth position:*

F fabric

*Ninth position:* paint finish or fabric group

*Fabric groups:*  
Specify two-digit fabric group number

### Application Notes



Crown, raceway, and structural base covers are required for every wall frame in corresponding widths. Covers are specified in pairs to cover both sides of a frame.

Structural base covers bolt to each side of the wall frame up to 21"H for structure and continuous attachment capability.

When ordering 60" wide or greater width upholstered structural base covers, please check the width of the fabric selected.

# Access covers

## outlets cover

description	type	w	d	h	pattern no.	black	no finish	smooth	textured	
Outlets cover	9"H cover	12"	1"	9"	<b>APC OC ( )</b>			\$21.		
										
Hinged outlet flap (each)					<b>APC OCF</b>			21.		
Outlet fillers (Set of 10)					<b>AR OF</b>	26.				
Hardwire outlets cover		12"	9"		<b>APC HOC ( )</b>			33.	37.	
Hardwire outlet box, desk height	quad	2"			<b>AR1 HOB</b>			147.		
	two quad	12"			<b>AR1 HOB2</b>			194.		
										

### Order Code

Example:	<b>APC OC-612</b>
<b>APC</b>	Service wall cover
<b>OC</b>	Outlets cover
<b>612</b>	Finish

### Specification Information

*Specify finish: Textured paint finish option for hardwire outlets cover only:*

### Application Notes

Locate outlets covers on wall frames before specifying other wall covers.

Outlets cover mounts between 21" and 30" (below standard desk height), 30" - 39" (above desk height) or 39" - 48" on service wall frame.

Outlets cover is 12" wide, and mounts anywhere on wall frame between 21" and 48" above the floor. Outlets cover corresponds to power components (specified separately) mounted on wall frame.

Outlets covers have four openings for power or PDC outlets. Specify outlet fillers for unused outlet openings in cover. Specify hinged outlet flap to conceal power or data outlet plugs. Each flap covers two openings; two flaps conceal all four openings in outlets cover.

For hardwire power applications (required in City of Chicago) specify hardwire outlets cover and hardwire outlets box. Do not specify cable tray covers at same level as hardwire power.




Hardwire outlet box accepts two Decora-style duplex outlets, and includes mounting brackets for one face of wall between 21" and 48"H. Two quad hardwire outlet box accepts four duplex outlets on one face. Also specify hardwire outlets cover, which has four outlet openings. Specify outlet fillers (page 12) for any unused outlet openings.

Outlet boxes include openings to permit continuous lay-in wiring with Wiremold® raceway. Electrical contractor supplies infeed cable, Wiremold 2400®, and duplex outlets. Outlet boxes can be planned back to back, with distribution on one side of service wall. Wiremold will not fit behind cable tray covers.

# Access covers

## *cable tray and slatwall covers*

Currents

description	w	d	h	pattern no.	smooth	textured
 9"H cable tray covers	12"	1"	9"	<b>APC 0912 C ( )</b>	\$57.	\$59.
	24"	1"	9"	<b>APC 0924 C ( )</b>	68.	71.
	36"	1"	9"	<b>APC 0936 C ( )</b>	78.	82.
	48"	1"	9"	<b>APC 0948 C ( )</b>	102.	107.
	60"	1"	9"	<b>APC 0960 C ( )</b>	129.	137.
	72"	1"	9"	<b>APC 0972 C ( )</b>	157.	165.
 9"H cable tray exit cover	12"	1"	9"	<b>APC 0912 CX ( )</b>	112.	116.
 9"H slatwall covers	12"	1"	9"	<b>APC 0912 S ( )</b>	50.	52.
	24"	1"	9"	<b>APC 0924 S ( )</b>	58.	61.
	36"	1"	9"	<b>APC 0936 S ( )</b>	69.	72.
	48"	1"	9"	<b>APC 0948 S ( )</b>	88.	93.
	60"	1"	9"	<b>APC 0960 S ( )</b>	112.	119.
	72"	1"	9"	<b>APC 0972 S ( )</b>	136.	144.

### Order Code

Example:	<b>APC 0948 C-612</b>
<b>APC</b>	Service wall cover
<b>09</b>	Height
<b>48</b>	Width
<b>C</b>	Surface type
<b>612</b>	Finish

### Specification Information

*Specify smooth or textured painted finish for cable tray and slatwall covers:*

### Application Notes

Cable tray and slatwall covers provide integral performance surface on one or both sides of a wall frame. Cable tray and slatwall may be planned in combination with other painted or upholstered covers to enclose frames between 21"H and 48"H.

Cable tray mounts from 21" - 30" only on any panel frame. Adjacent trays form continuous, easily accessible cable management at worksurface or table height. Shorter segments provide local cable management below outlet modules. Covers may span across a straight wall frame connection.

Bottom half of cable tray cover permits cables to be managed on surface of studs with one cable holder (55 CAT5 cables) or two clips (28 cables).


Cable tray exit cover permits power jumpers and data/ communication cables to pass from wall to Currents desk service beam. Cable tray exit cover, 12"W only, has two openings with sliding covers.


Slatwall supports KnollExtra task lights, monitor arms, paper trays, file holders and other accessories.


# Access covers


## marker surface and painted steel covers

Currents

description	w	d	h	pattern no.	M	smooth	textured
9"H Marker surface covers 	24"	1	9"	<b>APC 0924 M</b>	\$33.		
	36"	1	9"	<b>APC 0936 M</b>	38.		
	48"	1	9"	<b>APC 0948 M</b>	44.		
	60"	1	9"	<b>APC 0960 M</b>	50.		
	72"	1	9"	<b>APC 0972 M</b>	55.		

16"H Marker surface covers 	48"	1	16"	<b>APC 1648 M</b>	64.		
	60"	1	16"	<b>APC 1660 M</b>	77.		
	72"	1	16"	<b>APC 1672 M</b>	87.		

9"H Painted steel covers 	12"	1"	9"	<b>APC 0912 P ( )</b>		25.	27.
	24"	1"	9"	<b>APC 0924 P ( )</b>		30.	33.
	36"	1"	9"	<b>APC 0936 P ( )</b>		34.	38.
	48"	1"	9"	<b>APC 0948 P ( )</b>		40.	44.
	60"	1"	9"	<b>APC 0960 P ( )</b>		45.	50.
	72"	1"	9"	<b>APC 0972 P ( )</b>		51.	55.

16"H Painted steel covers 	48"	1"	16"	<b>APC 1648 P ( )</b>		59.	64.
	60"	1"	16"	<b>APC 1660 P ( )</b>		71.	77.
	72"	1"	16"	<b>APC 1672 P ( )</b>		79.	87.

### Order Code

Example:	<b>APC 0948 P 117</b>
<b>APC</b>	Service wall cover
<b>09</b>	Height
<b>48</b>	Width
<b>P</b>	Surface type
<b>117</b>	Finish

### Specification Information

9"H covers plan at any 9"H level in 39", 48", or 64" walls.

For active face of 39"H frame, specify two 9"H covers each side.

For active face of 48"H frame, specify three 9"H covers each side.

For active face of 64"H frame, specify three 9"H covers and one 16"H cover each side.

#### Surface type:

P Painted  
M Marker

Specify smooth or textured painted finish for steel covers:

### Application Notes

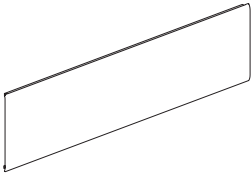
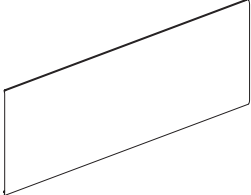
Marker surface covers are steel with a bright white dry-erase marker finish.

Painted steel covers provide a durable wall-like surface in smooth or textured finish.

Service wall covers enclose frames between 21"H and the top crown. Covers may be specified in any combination of widths corresponding to the total wall length. Covers may span across a straight wall frame connection.

For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slatwall surfaces.

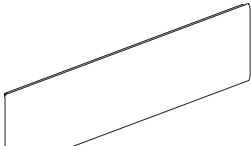
# Access covers upholstered

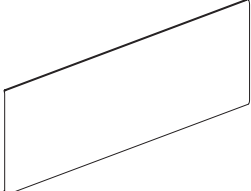
description	w	d	h	pattern no.	10	15	20	30	40	45	50	55
9"H Wall covers 	12"	1"	9"	<b>APC 0912 F ( )</b>	\$46.	\$46.	\$48.	\$51.	\$52.	\$53.	\$54.	\$58.
	24"	1"	9"	<b>APC 0924 F ( )</b>	57.	58.	60.	63.	66.	69.	72.	76.
	36"	1"	9"	<b>APC 0936 F ( )</b>	69.	71.	72.	77.	82.	84.	88.	96.
	48"	1"	9"	<b>APC 0948 F ( )</b>	75.	77.	81.	88.	94.	97.	101.	107.
	60"	1"	9"	<b>APC 0960 F ( )</b>	89.	94.	98.	105.	113.	118.	124.	131.
	72"	1"	9"	<b>APC 0972 F ( )</b>	n/a	106.	n/a	n/a	n/a	n/a	n/a	n/a
16"H Wall covers 	36"	1"	16"	<b>APC 1636 F ( )</b>	101.	105.	108.	116.	124.	127.	132.	139.
	48"	1"	16"	<b>APC 1648 F ( )</b>	112.	118.	123.	132.	139.	145.	153.	162.
	60"	1"	16"	<b>APC 1660 F ( )</b>	134.	139.	147.	158.	168.	175.	185.	197.
	72"	1"	16"	<b>APC 1672 F ( )</b>	n/a	159.	n/a	n/a	n/a	n/a	n/a	n/a

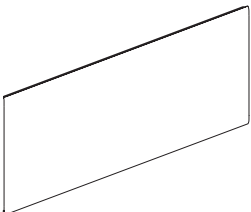
Order Code	Specification Information	Application Notes
Example: <b>APC 0948 F15</b> <b>APC</b> Service wall cover <b>09</b> Height <b>48</b> Width <b>F</b> Surface type <b>15</b> Fabric group	For active face of 39"H frame, specify two 9"H covers.  For active face of 48"H frame, specify three 9"H covers.  For active face of 64"H frame, specify three 9"H covers and one 16"H cover.  For full fabric surface between 5" and 21", order upholstered attachment zone cover.  <i>Surface type:</i> F Upholstered  <i>Specify fabric group:</i> 10 Fabric group 10 15 Fabric group 15 20 Fabric group 20 30 Fabric group 30 40 Fabric group 40 45 Fabric group 45 50 Fabric group 50 55 Fabric group 55	Upholstered service wall covers enclose frame between 21" and the top crown.  Specify widths corresponding to wall frame width, or in any 12" increment to accommodate 12"W outlets covers or slatwall covers. Covers may span across a straight wall frame connection.  For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slatwall surfaces. outlets cover.  For outlets covers, see page 12.  When ordering 60" or wider covers, please check width of fabric specified.



# Access covers tackable upholstered

description	w	d	h	pattern no.	10	15	20	30	40	45	50	55
 9"H Wall covers	12"	1"	9"	<b>APC 0912 A ( )</b>	\$92.	\$96.	\$99.	\$104.	\$111.	\$113.	\$119.	\$128.
	24"	1"	9"	<b>APC 0924 A ( )</b>	92.	96.	99.	104.	111.	113.	119.	128.
	36"	1"	9"	<b>APC 0936 A ( )</b>	92.	96.	99.	104.	111.	113.	119.	128.
	48"	1"	9"	<b>APC 0948 A ( )</b>	101.	105.	109.	118.	127.	131.	137.	146.
	60"	1"	9"	<b>APC 0960 A ( )</b>	120.	127.	132.	142.	153.	158.	166.	178.
	72"	1"	9"	<b>APC 0972 A ( )</b>	n/a	144.	n/a	n/a	n/a	n/a	n/a	n/a

 16"H Wall covers	36"	1"	16"	<b>APC 1636 A ( )</b>	137.	142.	148.	156.	165.	170.	180.	189.
	48"	1"	16"	<b>APC 1648 A ( )</b>	152.	158.	164.	178.	189.	196.	206.	218.
	60"	1"	16"	<b>APC 1660 A ( )</b>	181.	189.	199.	214.	229.	238.	248.	266.
	72"	1"	16"	<b>APC 1672 A ( )</b>	n/a	215.	n/a	n/a	n/a	n/a	n/a	n/a

 18"H Wall cover (replaces (2) 9"H)	36"	1"	18"	<b>APC 1836 A ( )</b>	163.	168.	174.	184.	194.	200.	211.	220.
	48"	1"	18"	<b>APC 1848 A ( )</b>	205.	211.	217.	229.	242.	248.	258.	274.
	60"	1"	18"	<b>APC 1860 A ( )</b>	245.	253.	260.	276.	290.	296.	306.	321.
	72"	1"	18"	<b>APC 1872 A ( )</b>	n/a	286.	n/a	n/a	n/a	n/a	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>APC 0948 A20</b> <b>APC</b> Service wall cover <b>09</b> Height <b>48</b> Width <b>A</b> Surface type <b>20</b> Fabric group	<p>For active face of 39"H frame, specify two 9"H covers. For passive face (along corridor or wall) specify one 18" cover.</p> <p>For active face of 48"H frame, specify three 9"H covers or one 9"H and one 18"H cover. For passive face, specify 27"H cover.</p> <p>For active face of 64"H frame, specify three 9"H covers and one 16"H cover or one 9"H, one 18"H, and one 16"H cover. For passive face, specify one 27" and one 16"H cover.</p> <p>For full fabric surface between 5" and 21", order upholstered attachment zone cover.</p> <p><i>Surface type:</i> A tackable upholstered</p> <p><i>Specify fabric group:</i>            10 Fabric group 10            15 Fabric group 15            20 Fabric group 20            30 Fabric group 30            40 Fabric group 40            45 Fabric group 45            50 Fabric group 50            55 Fabric group 55</p>	<p>Tackable upholstered service wall covers enclose wall frames between 21" and the top crown. Covers incorporate a tackable, acoustical core in the same outward profile as other upholstered covers.</p> <p>Specify widths corresponding to wall frame width, or in any 12" increment to accommodate 12"W outlets covers or slatwall covers. Covers may span across a straight wall frame connection.</p> <p>For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slatwall surfaces.</p> <p>For passive wall surfaces (corridors or conference areas) specify 18"H or 27"H covers in place of two or three 9"H covers.</p> <p>18"H covers may also be specified above 9"H covers including outlets covers below desk height on 48" or 64"H service walls.</p> <p>For outlets covers, see page 12.</p> <p>Service wall with upholstered tackable covers has been tested to NRC .40 and STC 22.</p> <p>When ordering 60" or wider covers, please check width of fabric specified.</p>



# Access covers tackable upholstered

description	w	d	h	pattern no.	10	15	20	30	40	45	50	55
27"H Wall cover (replaces (3) 9"H)	36"	1"	27"	<b>APC 2736 A ( )</b>	\$245.	\$253.	\$260.	\$276.	\$290.	\$296.	\$306.	\$321.
	48"	1"	27"	<b>APC 2748 A ( )</b>	308.	316.	323.	342.	358.	367.	380.	395.
	60"	1"	27"	<b>APC 2760 A ( )</b>	371.	380.	383.	408.	426.	436.	448.	463.
	72"	1"	27"	<b>APC 2772 A ( )</b>	n/a	431.	n/a	n/a	n/a	n/a	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>APC 0948 A20</b>		
<b>APC</b> Service wall cover	For active face of 39"H frame, specify two 9"H covers. For passive face (along corridor or wall) specify one 18" cover.	Tackable upholstered service wall covers enclose wall frames between 21" and the top crown. Covers incorporate a tackable, acoustical core in the same outward profile as other upholstered covers.
<b>09</b> Height		For passive wall surfaces (corridors or conference areas) specify 18"H or 27"H covers in place of two or three 9"H covers.
<b>48</b> Width	For active face of 48"H frame, specify three 9"H covers or one 9"H and one 18"H cover. For passive face, specify 27"H cover.	18"H covers may also be specified above 9"H covers including outlets covers below desk height on 48" or 64"H service walls.
<b>A</b> Surface type		For outlets covers, see page 12 .
<b>20</b> Fabric group	For active face of 64"H frame, specify three 9"H covers and one 16"H cover or one 9"H, one 18"H, and one 16"H cover. For passive face, specify one 27" and one 16"H cover.	Service wall with upholstered tackable covers has been tested to NRC .40 and STC 22.
	For full fabric surface between 5" and 21", order upholstered attachment zone cover.	When ordering 60" or wider covers, please check width of fabric specified.
	<i>Surface type:</i> A tackable upholstered	
	<i>Specify fabric group:</i> 10 Fabric group 10 15 Fabric group 15 20 Fabric group 20 30 Fabric group 30 40 Fabric group 40 45 Fabric group 45 50 Fabric group 50 55 Fabric group 55	For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slatwall surfaces.

# Access covers glazed translucent

Currents

description	w	d	h	pattern no.	list price
9"H Wall covers 	24"	1"	9"	<b>APC 0924 G ( )</b>	\$182.
	36"	1"	9"	<b>APC 0936 G ( )</b>	217.
	48"	1"	9"	<b>APC 0948 G ( )</b>	276.
	60"	1"	9"	<b>APC 0960 G ( )</b>	324.
	72"	1"	9"	<b>APC 0972 G ( )</b>	393.
16"H Wall cover 	24"	1"	16"	<b>APC 1624 G ( )</b>	198.
	36"	1"	16"	<b>APC 1636 G ( )</b>	261.
	48"	1"	16"	<b>APC 1648 G ( )</b>	332.
	60"	1"	16"	<b>APC 1660 G ( )</b>	394.
	72"	1"	16"	<b>APC 1672 G ( )</b>	476.

## Order Code

Example: <b>APC 0948 G 613</b>	
<b>APC</b>	Service wall cover
<b>09</b>	Height
<b>48</b>	Width
<b>G</b>	Surface type
<b>613</b>	Finish

## Specification Information

9"H covers plan at any 9"H level in 39", 48", or 64" walls.

For active face of 39"H frame, specify two 9"H covers each side.

For active face of 48"H frame, specify three 9"H covers each side.

For active face of 64"H frame, specify three 9"H covers and one 16"H cover each side.

*Surface type:*

G Glazed translucent

*Specify painted finish for covers top and bottom frame (textured paint only):*

Glazed translucent covers are frosted acrylic with top and bottom frame extrusions.




Service wall covers enclose frames between 21"H and the top crown. Covers may be specified in any combination of widths corresponding to the total wall length. Covers may span across a straight wall frame connection.

For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, glazed or slatwall surfaces.

# Wall ends and connectors

## 90° connectors

Currents




description	w	d	h	pattern no.	paint
 L connector, 90°	6"	6"	39"	<b>AX1 L39 ( ) ( )</b>	\$244.
	6"	6"	48"	<b>AX1 L48 ( ) ( )</b>	292.
	6"	6"	64"	<b>AX1 L64 ( ) ( )</b>	342.
 T connector, 90°	6"	7"	39"	<b>AX1 T39 ( ) ( )</b>	244.
	6"	7"	48"	<b>AX1 T48 ( ) ( )</b>	292.
	6"	7"	64"	<b>AX1 T64 ( ) ( )</b>	342.
 X connector, 90°	7"	7"	39"	<b>AX1 X39 ( )</b>	244.
	7"	7"	48"	<b>AX1 X48 ( )</b>	267.
	7"	7"	64"	<b>AX1 X64 ( )</b>	292.

Order Code	Specification Information	Application Notes
Example: <b>AX1 L39 612,612</b>	For L, T, connectors specify:	L, T, and X connectors join Currents panels at 90° angles and include vertical trim covers, top cap and crown end caps, and one spare set of straight connectors.
<b>AX1</b> Currents connector	<i>Seventh position:</i> painted finish for outside trim cover and raceway cover	
<b>L</b> Type	<i>Eighth position, and X connectors:</i> painted finish for top cap and crown end caps	
<b>39</b> Height	For flat ends specify:	
<b>612</b> Trim/raceway cover finish	<i>Seventh position:</i> painted finish for outside trim cover and raceway cover	
<b>612</b> Top/end cap finish	<i>Eighth position:</i> painted finish for crown end cap	

# Wall ends and connectors

## *other ends and connectors*

Currents

description	type	w	d	h	pattern no.	paint
Outrigger 	deep	3"	15"	21"	<b>AX1ORD ( )</b>	\$136.
	standard	3"	8"	21"	<b>AX1OR ( )</b>	98.
Stabilizer end cabinet 	no lock	6 - 8"	19"	39"	<b>AX1 STC39 3 ( )( )</b>	1,170.
		6 - 8"	19"	48"	<b>AX1 STC48 3 ( )( )</b>	1,268.
		6 - 8"	19"	64"	<b>AX1 STC64 3 ( )( )</b>	1,462.
	with lock	6 - 8"	19"	39"	<b>AX1 STC39 L3 ( )( )</b>	1,318.
		6 - 8"	19"	48"	<b>AX1 STC48 L3 ( )( )</b>	1,414.
		6 - 8"	19"	64"	<b>AX1 STC64 L3 ( )( )</b>	1,610.
High low straight connector	48 - 39"	–	5"	48"	<b>AX1 HLS4839 ( )( )</b>	132.
	64 - 39"	–	5"	64"	<b>AX1 HLS6439 ( )( )</b>	227.
	64 - 48"	–	5"	64"	<b>AX1 HLS6448 ( )( )</b>	152.
Service wall starter	39"	1"	2"	39"	<b>AX1 SWS39 ( )</b>	76.
	48"	1"	2"	48"	<b>AX1 SWS48 ( )</b>	85.
	64"	1"	2"	64"	<b>AX1 SWS64 ( )</b>	96.
Straight connector kit (replacement)	–	–	–	<b>AX1 S</b>	15.	
Flat end 	–	–	5"	39"	<b>AX1 F39 ( )( )</b>	77.
	–	–	5"	48"	<b>AX1 F48 ( )( )</b>	88.
	–	–	5"	64"	<b>AX1 F64 ( )( )</b>	98.



Order Code	Specification Information	Application Notes
Example: <b>AX1 HLS4839 612,612</b> <b>AX1</b> Currents connector <b>F</b> Type <b>48</b> Height <b>612</b> Vertical cover finish <b>612</b> Crown end finish	For stabilizer end specify:  <i>Tenth position:</i> cabinet finish  <i>Eleventh position:</i> top cap finish  <i>Specify painted finishes for outrigger, stabilizer end cabinet, top and crown end caps.</i>	Outrigger connects to structural base cover at any point. Outriggers (or perpendicular systems panels) are required every 8' and adjacent to flat end for adequate support. Specify deep outriggers when cantilevering 24"D worksurfaces without adjacent perpendicular systems panels or Currents service wall connectors.  Low profile outrigger should be specified when desks or credenzas with service beam are positioned along service wall.  Stabilizer end cabinet supports one end of Currents service wall spine. Hinged cover panels in cabinet open for access to data/telecom consolidation point and cable storage. Stabilizer end cabinet with lock has recessed KnollKey lock in finger pull reveal.  Stabilizer end cabinet expands the end of the Currents spine 3 1/2" to accommodate intermediate panel divisions between workstations. In the 3 1/2" x 5" space above this extension a ceiling infeed panel
		may be added. Inside back corner covers may be removed for unobstructed access to cabinet and wall frame surface.  High-low straight connectors join service wall of different heights in a straight line.  Service wall starter connects service wall to building wall.  Straight connector is replacement hardware kit to join Currents wall frames of the same height end to end. Kit includes four barrel-shape connectors and hardware.  Flat end finishes end of corresponding height spine when end of wall is supported by outriggers.

# Wall ends and connectors

## *fence ends and connectors*

### *connectors*

Currents

description	w	d	h	pattern no.	list price
L connector, 90 degrees	6"	6"	19"	<b>AX1 L18 ( )</b>	\$295.
					
T connector, 90 degrees	6"	7"	19"	<b>AX1 T18 ( )</b>	301.
					
X connector, 90 degrees	7"	7"	19"	<b>AX1 X18</b>	248.
					
V connector, 120 degrees	5 1/2"	5 1/2"	19"	<b>AX1 V18 ( )</b>	269.
					
Y connector, 120 degrees	6 1/2"	5 1/2"	19"	<b>AX1 Y18 ( )</b>	125.
					

#### Order Code

Example: <b>AX1 L 18 613</b>
<b>AX1</b> Fence connector
<b>L</b> Type
<b>18</b> Height
<b>613</b> Trim finish

#### Specification Notes

*Specify painted finishes for connector trim covers.*

For L, T, V and Y connectors specify finish for vertical trim.

All top caps and crown covers are trim grey. Specify finish for outside trim of flat end.

#### Application Notes

L, T and X connectors join frames at 90° angles and include vertical trim covers, top cap and crown end caps and one set of straight connectors.

Y and V connectors join frames at 120° angles.

Flat end finishes end of Fence frames and includes crown end detail.

Wall ends and connectors  
*fence ends and connectors*  
*connectors*

description	w	d	h	pattern no.	list price
Flat end	-	5"	19"	<b>AX1 F18 ( )</b>	\$111.



**Order Code**

Example: <b>AX1 L 18 613</b>
<b>AX1</b> Fence connector
<b>L</b> Type
<b>18</b> Height
<b>613</b> Trim finish

**Specification Notes**

*Specify painted finishes for connector trim covers.*

For L, T, V and Y connectors specify finish for vertical trim.

All top caps and crown covers are trim grey. Specify finish for outside trim of flat end.

**Application Notes**







L, T and X connectors join frames at 90° angles and include vertical trim covers, top cap and crown end caps and one set of straight connectors.

Y and V connectors join frames at 120° angles.

Flat end finishes end of Fence frames and includes crown end detail.

Wall ends and connectors  
*fence ends and connectors*  
*other hardware*

Currents

description	type	w	d	h	pattern no.	list price
T-end adapter 	0" or 1 1/8" extension	1 3/8"	2 1/8"	2 3/8"	<b>AX1 AK1 ( )</b>	\$15.
						
T-end and stabilizer end cabinet adapter 	3 1/2" extension	4"	5"	16 1/2"	<b>AX1 AK3 ( )</b>	58.
						
Flat wall starter 	48"H service wall		3 1/4"	27"	<b>AX1 FWS 48</b>	49.
	64"H service wall		3 1/4"	43"	<b>AX1 FWS 64</b>	54.
	Fence and 39"H wall		3 1/4"	18"	<b>AX1 FWS 39</b>	44.
High-low straight connector 	48"H wall - Fence				<b>AX1 FHLS4818 ( )</b>	292.

**Order Code**

Example: <b>AX1 FWS 39</b>	
<b>AX1</b>	Fence end
<b>FWS</b>	Type
<b>39</b>	Height

**Specification Information**

*Specify painted finishes for T-end adapter kits:*  
 Flat wall starter is black only.  
 Crown end covers are trim grey.

**Application Notes**



Fence accepts Currents T-ends for 39" service wall and 39"H stabilizer end cabinet.  
 High-low fence connector joins fence and 48"H Currents service wall.  
 Specify AX1 AK1 adapter kit to complete bottom trim and crown end of T-ends with 0" or 1 1/8" extension.  
 Specify AX1 AK3 adapter kit to complete bottom trim and crown end of T-ends with 3" extension and 39"H stabilizer end cabinet.  
 Flat wall starter connects Fence frames and Currents service wall to building wall.



# Wall frame accessories

## *wall frame*

Currents

description	type	w	d	h	pattern no.	list price	
Crown top cap 		24"	2"	–	<b>APT C24</b>	\$8.	
		36"	2"	–	<b>APT C36</b>	12.	
		48"	2"	–	<b>APT C48</b>	19.	
		60"	2"	–	<b>APT C60</b>	22.	
		72"	2"	–	<b>APT C72</b>	26.	
Crown end cap (replacement part)					<b>APT ( )</b>	5.	
Acoustical inserts 		39"H	12"	2"	34"	<b>APA 39</b>	20.
		48"H	12"	2"	43"	<b>APA 48</b>	24.
		64"H	12"	2"	59"	<b>APA 64</b>	33.

### Order Code

Example: <b>APT 612</b>	
<b>APT</b>	Service wall trim
<b>612</b>	Painted finish

### Specification Information

Crown top caps are trim grey.  
 Specify painted finish for crown end cap:

### Application Notes


Crown top caps are optional fillers for the crown where no add-up panels are planned. Crown end caps are included with all Currents connectors except Equity end trim kit.

Acoustical inserts fit between studs in service wall frame to increase control of sound transmission. Inserts are bagged in heights corresponding to wall frame. Specify four inserts for 48"W frame, five for 60"W frame, and six for 72"W frame. Service walls with acoustical inserts have been tested to STC 33.

# Wall frame accessories

## *fence frame*

Currents

description	type	w	d	h	pattern no.	list price
Wire manager cover (set of 2)		3 1/2"	3"	18 3/8"	<b>AR1 VCM</b>	\$49.
						
Carpet grips (set of 10)					<b>AA1CG</b>	12.
Non-skid pads (set of 10)					<b>AA1NSK</b>	27.
Hardwire fence infeed (NYC)	2 + 2				<b>AR1 EPHF</b>	346.
	3 + 3				<b>AR1 TPHF</b>	368.

### Order Code

Example	<b>AR1 VCM</b>
<b>AR1</b>	Raceway
<b>VCM</b>	Type

### Specification Information

Wire manager covers are integral color trim grey.

### Application Notes

Wire manager covers snap into the sides of the fence legs to guide cables from the floor to the underside of the frame.

Carpet grips and/or non-skid pads snap onto bottom of stabilizer feet to prevent legs from sliding.


Hardwire fence infeed is approved for City of New York installation. Infeed includes wire manager cover, junction box and connector to desk height outlet module.

# Wall frame accessories


## *fence panes and end brackets*

Currents

description	w	d	h	pattern no.	list price
panes (set of 4)	12"	1 3/4"	12"	<b>AU 1212 T 4</b>	\$281.



end bracket kit				<b>AB1 FAE ( )</b>	130.
-----------------	--	--	--	--------------------	------



### Order Code

Example:	<b>AU 1212 T 4</b>
<b>AU</b>	Add up
<b>12</b>	Height
<b>12</b>	Width
<b>T</b>	Finish
<b>4</b>	Quantity

### Specification Information

Panes are molded translucent finish and are ordered in sets of 4.

End bracket kit includes a left and a right handed bracket.

*Specify paint finish for end bracket.*

### Application Notes

Panes add privacy above Fence and any height Currents service wall.

Bottom edge inserts in center of crown at any point.




Fence end brackets attach to the Currents fence to support one end of rectilinear or one back edge of a corner worksurface when the other ends are properly supported by legs, storage or panel brackets Refer to the specific worksurface Application Notes for support requirements.

Fence end brackets support the underside of the worksurface in 1" increments from 26" to 28" (27" to 29" top height).

# Panel system starters and T-ends

## *Morrison or linkable screen panel starters*

Currents


description	type	w	d	h	pattern no.	paint	
	Morrison and linkable screen panel starters	30"H panel	4"	1"	26"	<b>AA1MPS30( )</b>	\$88.
	39"H panel/screen	4"	1"	35"	<b>AA1MPS39( )</b>	88.	
	42"H panel	4"	1"	38"	<b>AA1MPS42( )</b>	88.	
	48"H panel/screen	4"	1"	44"	<b>AA1MPS48( )</b>	93.	
	56"H panel	4"	1"	52"	<b>AA1MPS56( )</b>	98.	
	64"H panel/screen	4"	1"	60"	<b>AA1MPS64( )</b>	102.	
	74"H panel	4"	1"	70"	<b>AA1MPS74( )</b>	107.	
	80"H panel	4"	1"	76"	<b>AA1MPS80( )</b>	107.	
	Morrison raceway shroud	2 1/4"	3"	4"	<b>AA1MRS( )</b>	38.	
	panel/screen top clip				<b>AA2 MTC ( )</b>	42.	
	Morrison end trim	30"H panel	1"	2 1/4"	9"	<b>AA1MET30( )</b>	27.
	39"H panel	1"	2 1/4"	18"	<b>AA1MET39( )</b>	27.	
	42"H panel	1"	2 1/4"	21"	<b>AA1MET42( )</b>	29.	
	48"H panel	1"	2 1/4"	27"	<b>AA1MET48( )</b>	31.	
	56"H panel	1"	2 1/4"	35"	<b>AA1MET56( )</b>	33.	
	64"H panel	1"	2 1/4"	43"	<b>AA1MET64( )</b>	38.	
	74"H panel	1"	2 1/4"	53"	<b>AA1MET74( )</b>	42.	
	80"H panel	1"	2 1/4"	59"	<b>AA1MET80( )</b>	44.	
	Currents end trim	39" linkable screen	1"	2"	18"	<b>AA1CET39</b>	27.
	48" linkable screen	1"	2"	27"	<b>AA1CET48</b>	31.	
	64" linkable screen	1"	2"	43"	<b>AA1CET64</b>	38.	


Order Code	Specification Information	Application Notes
Example: <b>AA1 MPS48 612</b>	<p><i>Specify paint finishes for panel starters, Morrison raceway shroud and end trim. Currents end trims are trim grey integral color.</i></p>	<p>Panel starters attach perpendicular panels or linkable screens to Currents service wall structural base covers (5" - 21"H).</p> <p>Panel starters include clamp bracket to any height Currents wall and full height connector track with modified top wedge block. For Morrison also specify high/low corner top cap <b>MT5 HLC ( )</b> in width of first panel.</p> <p>Top clip connects panel connector track to Currents crown. Specify top clip for added stiffness of panels higher than 48" or whenever cantilevering components from panel. Top clip is not compatible with end trim.</p> <p>Specify raceway shroud if connecting power from Currents service wall to Morrison panel.</p>
<b>AA1</b> Accessory		
<b>M</b> Morrison		
<b>PS</b> Panel starter		
<b>48</b> Panel height		
<b>612</b> Finish	<p>Optional Morrison end trim fills 5/8" reveal between panel end and Currents wall surface. End trim also includes end top cap (high/low corner top cap is not required in this application).</p> <p>Currents end trims are optional fillers for linkable screen starters. End trims may interfere with easy access to wall covers.</p>	

# Panel system starters and T-ends

Currents

## Morrison, Currents screens and linkable screen T-ends non-upholstered

description	type	w	d	h	pattern no.	0" or 1 1/8" extension	3 1/2" extension
 T ends for Currents screens and linkable screens	39" screen/39" spine	2 1/4"-5 3/4"	7"	39"	AX2 C3939 ( ) ( ) ( )	\$610.	\$683.
	48" screen/39" spine	2 1/4"-5 3/4"	7"	48"	AX2 C4839 ( ) ( ) ( )	707.	781.
	48" screen/48" spine	2 1/4"-5 3/4"	7"	48"	AX2 C4848 ( ) ( ) ( )	658.	732.
	64" screen/39" spine	2 1/4"-5 3/4"	7"	64"	AX2 C6439 ( ) ( ) ( )	806.	878.
	64" screen/48" spine	2 1/4"-5 3/4"	7"	64"	AX2 C6448 ( ) ( ) ( )	756.	830.
	64" screen/64" spine	2 1/4"-5 3/4"	7"	64"	AX2 C6464 ( ) ( ) ( )	756.	830.





description	type	w	d	h	pattern no.	0" or 1 1/8" extension	3 1/2" extension
 T ends for Morrison panels	39" panel/39" spine	6"	7"	39"	AX1 M3939 ( ) ( ) ( )	610.	683.
	42" panel/39" spine	6"	7"	42"	AX1 M4239 ( ) ( ) ( )	658.	732.
	48" panel/39" spine	6"	7"	48"	AX1 M4839 ( ) ( ) ( )	707.	781.
	48" panel/48" spine	6"	7"	48"	AX1 M4848 ( ) ( ) ( )	658.	732.
	56" panel/39" spine	6"	7"	56"	AX1 M5639 ( ) ( ) ( )	756.	830.
	56" panel/48" spine	6"	7"	56"	AX1 M5648 ( ) ( ) ( )	707.	781.
	64" panel/39" spine	6"	7"	64"	AX1 M6439 ( ) ( ) ( )	806.	878.
	64" panel/48" spine	6"	7"	64"	AX1 M6448 ( ) ( ) ( )	756.	830.
	64" panel/64" spine	6"	7"	64"	AX1 M6464 ( ) ( ) ( )	756.	830.
	80" panel/39" spine	6"	7"	80"	AX1 M8039 ( ) ( ) ( )	976.	1,073.
	80" panel/48" spine	6"	7"	80"	AX1 M8048 ( ) ( ) ( )	976.	1,073.
	80" panel/64" spine	6"	7"	80"	AX1 M8064 ( ) ( ) ( )	976.	1,073.

Order Code	Specification Information	Application Notes
Example: <b>AX1 M6448 3 612, 612</b>	<i>T ends begin with AX1-prefix.</i>	<p>T-end encloses the end of a Currents service wall and connects to perpendicular Currents wall-attached screens, linkable screens or panels on one or both sides. T-end 7"W Morrison style top cap.</p> <p>Specify Morrison straight connector separately to attach linkable screen or panel. Specify Morrison end connector, top cap and raceway cover kits separately, to finish side edge of Morrison T-end without a connected panel. Specify Currents end connector for side of Currents T-end without a connected screen.</p> <p>Specify T-ends for Morrison or Currents to capture the end of the wall (no extension) or to extend the wall 1 1/8" or 3 1/2". This extension enables precise planning of multiple workstations and intermediate panels between workstations.</p> <p>Specify two 0" T-ends for a single workstation on each side (no intermediate panels).</p> <p>Specify two 1 1/8" T-ends for one intermediate panel, one 1 1/8" and one 3 1/2" for two panels, and two 3 1/2" for three intermediate panels.</p> <p>T-ends with 3 1/2" extension have removable inside covers and accept ceiling infed panel.</p>
<b>AX1</b> Currents connector	<i>Fourth position indicates attached panel system:</i>	
<b>M</b> Morrison	C Currents screen/linkable screen	
<b>64</b> Morrison height	M Morrison panel	
<b>48</b> Currents height	<i>Fifth position: height of panel.</i>	
<b>3</b> Extension	<i>Seventh position: height of service wall.</i>	
<b>612</b> Top cap finish	<i>Ninth position: extension at end of spine.</i>	
<b>612</b> Vertical trim cover	0 0" extension	
	1 1 1/8" extension	
	3 3 1/2" extension	
	<i>Tenth position: painted finish for Morrison top caps and crown end.</i>	
	<i>Eleventh position: painted finish for vertical trim cover.</i>	

# Panel system starters and T-ends

## *Equity panel starters, end starters and trim kits*

Currents

description	type	pattern no.	list price
 Equity panel starters	40"	<b>AA1EPS40</b>	\$215.
	41"	<b>AA3EPS41</b>	253.
	48"	<b>AA1EPS48</b>	224.
	49"	<b>AA3EPS49</b>	264.
	53"	<b>AA1EPS53</b>	234.
	60"	<b>AA1EPS60</b>	244.
	61"	<b>AA3EPS61</b>	288.
	64"	<b>AA3EPS64</b>	298.
	65"	<b>AA1EPS65</b>	254.
 Equity end starters	40"	<b>AX1 E40</b>	215.
	41"	<b>AX3E41</b>	253.
	48"	<b>AX1 E48</b>	224.
	49"	<b>AX3E49</b>	264.
	53"	<b>AX1 E53</b>	234.
	60"	<b>AX1 E60</b>	244.
	61"	<b>AX3E61</b>	288.
	64"	<b>AX3E64</b>	298.
	65"	<b>AX1 E65</b>	254.
 Equity end trim kits	39"H wall	<b>AX1 EET39(T,R,L)</b>	88.
	48"H wall	<b>AX1 EET48(T,R,L)</b>	118.
	64"H wall	<b>AX1 EET64(T,R,L)</b>	147.
	Crown end cap	<b>APT ( )</b>	5.
 Gap filler	40"/64"	<b>AX1 EGF24</b>	18.
	48"/64"	<b>AX1 EGF16</b>	10.
	53"/64"	<b>AX1 EGF11</b>	8.
	60"/64"	<b>AX1 EGF4</b>	6.

### Order Code

Example:	<b>AX1EET64T 612</b>
<b>AX1</b>	Accessory
<b>EET</b>	Equity end trim
<b>64</b>	Panel height
<b>T</b>	"T" both sides
<b>612</b>	Trim finish

### Specification Information

*Specify paint finish for Equity end and panel starters, trim kits and crown end cap. Note:* For more specific application information, please refer to pages 48-49 of the 1999 Equity Planning Guide. Additional finishes are available for crown end cap.

### Application Notes

Equity panel starters attach perpendicular panels to Currents wall structural base covers. Equity panel starter includes clamp bracket and adapter. Both end and panel starters include top clip for added stiffness. No connector post is required for either starter.

Equity end starter supports perpendicular panel run on the centerline of the end of the wall. Perpendicular panels should be at the same height or higher than the service wall.

The Equity end trim kit encloses and flushes out the end of the Currents service wall with attached, end started Equity panels.


Specify trim kit suffix "T" for panels on both sides, "L" or "R" for attached panels only on left or right side of end of the Currents wall (as seen from outside of "T" end). Also specify crown end cap for all end conditions.


Gap fillers fill the gap when attaching a lower height Equity panel at the end of a 64"H Currents service wall.

# Panel system starters and T-ends


## Reff panel starters and T-ends

Currents

description	type	pattern no.	price	0" or 1 1/8" extension	3 1/2" extension
 Reff panel starter	34"H (includes AA1RTC bracket)	<b>AA1RPS34</b> ( ) ( ) ( )	\$98.		
	42"H (includes AA1RTC bracket)	<b>AA1RPS42</b> ( ) ( ) ( )	170.		
	49"H (includes AA1RTC bracket)	<b>AA1RPS49</b> ( ) ( ) ( )	175.		
	64"H (includes AA1RTC bracket)	<b>AA1RPS64</b> ( ) ( ) ( )	186.		
	79"H (includes AA1RTC bracket)	<b>AA1RPS79</b> ( ) ( ) ( )	194.		

T-end frame for Reff panels					
	42" Reff panel to 39" Currents	<b>AX1 R34239</b> ( ) ( )		732.	806.
	49" Reff panel to 39" Currents	<b>AX1 R34939</b> ( ) ( )		740.	814.
	49" Reff panel to 48" Currents	<b>AX1 R34948</b> ( ) ( )		693.	765.
	64" Reff panel to 39" Currents	<b>AX1 R36439</b> ( ) ( )		818.	891.
	64" Reff panel to 48" Currents	<b>AX1 R36448</b> ( ) ( )		770.	843.
	64" Reff panel to 64" Currents	<b>AX1 R36464</b> ( ) ( )		770.	843.
	79" Reff panel to 39" Currents	<b>AX1 R37939</b> ( ) ( )		824.	898.
	79" Reff panel to 48" Currents	<b>AX1 R37948</b> ( ) ( )		776.	849.
	79" Reff panel to 64" Currents	<b>AX1 R37964</b> ( ) ( )		751.	824.

Top clip (replacement part)	<b>AA1RTC</b> ( )	73.
-----------------------------	-------------------	-----





Order Code	Specification Information	Application Notes
Example: <b>AA1-RPS64 48 A 613 613</b>	<i>For T-end specify extension at end of spine, then paint finish. Extension at end of spine:</i>	Panel starters attach perpendicular Reff panels to Currents service wall. Panel starter includes clamp bracket to structural base cover, top clip, and vertical extrusion corresponding to Reff panel height.
<b>AA1</b> Accessory	0 0" extension	Specify two 0" T-ends for a single workstation on each side (no intermediate panels).
<b>R</b> Reff	1 1 1/8" extension	
<b>PS</b> Panel starter	3 3 1/2" extensions	
<b>64</b> Panel height	<i>Specify following for panel starter:</i>	Specify two 1 1/8" T-ends for one intermediate panel, one 1 1/8" and one 3 1/2" for two panels, and two 3 1/2" for three intermediate panels.
<b>48</b> Adjoining panel width	1 Adjoining panel width	T-ends enclose the end of a Currents service wall and connects to perpendicular Reff panels on one or both sides.
<b>A</b> Panel top trim profile	2 Top trim profile of adjoining panel	
<b>613</b> Finish, panel starter	3 Painted finish for panel starter	T-ends with 3 1/2" extension have removable inside covers and accept ceiling infeed panel.
<b>613</b> Panel top trim finish	4 Top trim finish	Only Reff finishes are available for AA1RTC( ) top clip.
	In addition to Currents finishes, all standard Reff system painted finishes are available.	Specify Reff straight connector separately to attach panel. Specify Reff end connector to finish side edge without a connected wall. Specify T-end with 0", 1 1/8", or 3 1/2" of extension to accommodate the "creep" of panels between workstations on each side of service wall.

# Panel system starters and T-ends

## Reff T-end fabric and wood cover sets

Currents

description	type	height	pattern no.	list price
 Monolithic cover set	Fabric	42"	<b>R3B0P0F4207</b>	\$96.
		49"	<b>R3B0P0F4907</b>	108.
		64"	<b>R3B0P0F6407</b>	128.
		79"	<b>R3B0P0F7907</b>	147.
	Wood	42"	<b>R3B0P0H4207</b>	96.
		49"	<b>R3B0P0H4907</b>	108.
		64"	<b>R3B0P0H6407</b>	128.
		79"	<b>R3B0P0H7907</b>	147.
 Tiled cover set	Fabric	42"	<b>R3B0T0F4207</b>	96.
		49"	<b>R3B0T0F4907</b>	108.
		64"	<b>R3B0T0F6407</b>	128.
		79"	<b>R3B0T0F7907</b>	147.
	Wood	42"	<b>R3B0T0H4207</b>	96.
		49"	<b>R3B0T0H4907</b>	108.
		64"	<b>R3B0T0H6407</b>	128.
		79"	<b>R3B0T0H7907</b>	147.

### Order Code

Example:	<b>R3B0P0F4207</b>
<b>R3B</b>	Reff
<b>0P0F</b>	Monolithic
<b>42</b>	Panel height
<b>07</b>	Width

### Specification Information

See Reff System for full selection of painted finishes, fabrics and wood veneers for T-end cover sets.

#### Specify:

1. Top trim profile
2. Panel finishes
3. Top trim finish
4. Base finish

#### Top trim profile:

- A Flat
- B Square
- C Bullnose

#### Base height:

- 4 4" base height
- 6" base height is currently not available.

### Application Notes

Specify covers in monolithic or tiled sets to complete T-end frames for Reff..

Monolithic cover sets include a raceway cover and a single snap-in panel above.

Tiled sets include raceway cover and segmented tiles corresponding to adjacent Reff tiled panels.




Reff tiled module horizontal reveals are at nominal 19", 34", 49" and 64" above the floor and do not align with service wall cover reveals.



# Panel system starters and T-ends

## *Universal panel starters and T-ends*

Currents

description	w	d	h	pattern no.	paint
 Universal T-end adapter	2-6"	7"	39"	<b>AA1UA39( )</b>	\$58.
	2-6"	7"	48"	<b>AA1UA48( )</b>	69.
	2-6"	7"	64"	<b>AA1UA64( )</b>	77.
 Universal panel starters	3"	1"	39"	<b>AA1UPS39( )</b>	136.
	3"	1"	48"	<b>AA1UPS48( )</b>	147.
	3"	1"	64"	<b>AA1UPS64( )</b>	156.
 Universal top clip				<b>AA2 UTC ( )</b>	

### Order Code

Example:	<b>AA1 UPS48 612</b>
<b>AA1</b>	Accessory
<b>UPS</b>	Panel starter
<b>48</b>	Panel height
<b>612</b>	Finish

### Specification Information

*Specify paint finishes for Universal end and panel starter.*

### Application Notes

Universal adapters and starters integrate other panel systems with the service wall. Vertical surface accepts architectural wall starter of most other systems.

T-end adapters include connector to corresponding height T-end for Currents screen (specified separately).





Panel starter includes clamp bracket to structural base cover on service wall.

Top clip gives added stability to attached panels of the same height or higher than the service wall.

# Panel system starters and T-ends

## *fence panel starters*

Currents



description	type	w	d	h	pattern no.	list price
Panel starter for Morrison panels/ Currents linkable screens 	30"H panel	4"	1"	26"	<b>AA1FMPS30()</b>	\$58.
	39"H panel/screen	4"	1"	35"	<b>AA1FMPS39()</b>	59.
	42"H panel	4"	1"	38"	<b>AA1FMPS42()</b>	59.
	48" H panel/screen	4"	1"	44"	<b>AA1FMPS48()</b>	64.
	56"H panel	4"	1"	52"	<b>AA1FMPS56()</b>	64.
	64" H panel/screen	4"	1"	60"	<b>AA1FMPS64()</b>	69.
Universal panel starter		3"	1"	35"	<b>AA1FUPS39()</b>	90.
						
Universal top clip					<b>AA2 UTC ()</b>	55.
						
Morrison and linkable screen panel starters	panel/screen top clip				<b>AA2 MTC ()</b>	42.
						

Order Code	Specification Information	Application Notes
Example: <b>AA1 FMPS48 613</b>	<i>Specify paint finish for panel starters and top clip.</i>	Panel starters attach perpendicular panels to the Fence bottom rail.  Panel starters include clamp bracket and full height connector track with modified top wedge block. For Morrison also specify high/low corner topcap in width of first panel.  Top clip connects panel connector track with the Fence crown. Specify top clip for added stiffness of panels higher than 48" or whenever cantilevering components from panel.  Top clip is not compatible with end trim.
<b>AA1</b> Accessory		
<b>F</b> Fence		
<b>MPS</b> Morrison panel starter		
<b>48</b> Panel height		
<b>613</b> Finish	Universal panels starters integrate other panel systems with the Currents Fence. Vertical surface accepts architectural wall starters of most other systems.	

# Panel system starters and T-ends

## *end trim for fence panel starters*

Currents

description	type	w	d	h	pattern no.	list price
 End trim for Morrison panels	30"H panel	1"	2 1/4"	30"	<b>AA1FMET30( )</b>	\$74.
	39"H panel	1"	2 1/4"	39"	<b>AA1FMET39( )</b>	74.
	42"H panel	1"	2 1/4"	42"	<b>AA1FMET42( )</b>	77.
	48" H panel	1"	2 1/4"	48"	<b>AA1FMET48( )</b>	79.
	56" H panel	1"	2 1/4"	56"	<b>AA1FMET56( )</b>	81.
	64" H panel	1"	2 1/4"	64"	<b>AA1FMET64( )</b>	87.
 End trim for linkable screens	39" H screen	1"	2"	35"	<b>AA1FCET39</b>	62.
	48" H screen	1"	2"	44"	<b>AA1FCET48</b>	69.
	64" H screen	1"	2"	60"	<b>AA1FCET64</b>	77.

### Order Code

Example: **AA1 FMET39 612**

<b>AA1</b>	Accessory
<b>F</b>	Fence
<b>MET</b>	Morrison end trim
<b>39</b>	Panel height
<b>612</b>	Finish

### Specification Notes

*Specify paint finish for end trim for Morrison panels.*


Morrison end trim includes end raceway cover in matching color.

Linkable screen end trim is trim grey integral color.

### Application Notes

Optional end trim is available for the panel starter connector track. End trim covers the connector track above and below the panel starter clamp bracket.

Service wall power components  
 2+2 raceway  
 outlet module, central switch and outlets

description	type	w	d	h	pattern no.	black	orange (-O) or orange triangle (-T)	no finish
Desk height outlet module	21-48"H	5"	-	6"	<b>AR1 EOM</b>			\$121.
								
Central switch	21-48"H				<b>AR1-ELS-B</b>			337.
Duplex outlet	Circuit A				<b>AR1 DA</b>	29.		
	Circuit B				<b>AR1 DB</b>	29.		
	Circuit X				<b>AR1 DX</b>	29.	34.	
	Circuit Y				<b>AR1 DY</b>	29.	34.	

Order Code	Specification Information	Application Notes
Example: <b>AR1 EOM</b>	Raceway components distribute four 20-amp circuits at desk height or service wall base: two convenience circuits and two protected circuits, with separate grounds and heavy duty #10 neutrals.	Service wall power may be distributed point-to-point between outlet modules at desk height or in the base raceway.  Outlet housings and power rails accept two duplex outlets on each face and four connector/jumper cables.  Modular desk-height outlet module mounts between frame studs at any height from 21" - 48", above or below adjacent worksurfaces. Each 12"W frame bay can accept two outlet housings (up to four duplex outlets on each side.)  Central switch controls three outlets inside wall frame for task or ambient lights. Switch occupies right-hand outlet opening in outlets cover on one side of wall.  Switches cannot be positioned back-to-back in combination with an outlet module.
<b>AR1</b> Raceway		
<b>E</b> 2+2		
<b>OM</b> Outlet module		
		Central switch includes white rocker switch, connector to adjacent outlet module, and three simplex outlets on circuit B (2+2 or 3+3).  Outlet modules and power rails accept two duplex outlets on each face. Specify outlets with black face for convenience circuits. Specify orange face or black with orange triangle for protected circuits with separate ground and neutral in building power supply.

Service wall power components  
 2+2 raceway  
 other hardware


description	type	w	d	h	pattern no.	no finish
Power infeeds, modular	Base power	49"			AR1 EPI2	\$115.
	Desk height power	85"			AR1 EPI5	139.
	Ceiling infeed	145"			AR1 EPIC	174.
Hardwire base infeeds (NYC)	One connector				AR1 EPH1	232.
	Two connectors				AR1 EPH2	347.
Transitional connectors for Morrison or Reff	12"	61"			AR1 ET1	128.
	36"	85"			AR1 ET3	162.
	60"	109"			AR1 ET5	186.
	96"	133"			AR1 ET8	208.
Jumper cable	12" wall/36" desk	37"			AR1 EJ1	70.
	24" wall/48" desk	49"			AR1 EJ2	92.
	36" wall/60" desk	61"			AR1 EJ3	105.
	48" wall/84" desk	73"			AR1 EJ4	115.
	60" wall/84" desk	85"			AR1 EJ5	128.
	72" wall/96" desk	97"			AR1 EJ6	139.
	96" wall/120" desk	121"			AR1 EJ8	162.
	120" wall/144" desk	145"			AR1 EJ10	186.
	144" wall	169"			AR1 EJ12	208.

Order Code	Specification Information	Application Notes
Example: <b>AR1 ET1</b>	<p>Raceway components distribute four 20-amp circuits at desk height or panel base: two convenience circuits and two protected circuits, with separate grounds and heavy duty #10 neutrals.</p> <p><b>NOTE: The City of New York does not approve use of liquid-tight PVC conduit.</b> For installations anywhere in the City of New York, specify NYC infeed kits (AR1 EPH1 or 2, AR1 TPH1 or 2), which do not contain PVC. To connect power from the Currents service wall to wall-started panels: specify standard (not transitional) jumper cables. Also specify Raceway Cable Managers (AR1 RCM) to support power jumpers within the Currents wall base between the base or desk-height power module and the attached panel.</p>	<p>Desk height power infeed connects from floor box to desk height outlets module inside service wall.</p> <p>Ceiling infeed connects from ceiling junction box to desk height outlet module or to base power rail. Specify Currents ceiling infeed panel separately.</p> <p>Base power infeed connects building power to either end of base raceway power rail.</p> <p>Hardwire base infeed is approved for City of New York installations. Infeed includes junction box for base raceway and connector to desk height outlet module, or two connectors to adjacent base raceway power rails.</p> <p>Transitional connectors connect Currents service wall power components to powered Morrison or Reff panels or Morrison Network desks. Application dimension indicates distance</p>
<b>AR1</b> Raceway		
<b>E</b> 2+2		
<b>T</b> Transitional		
<b>1</b> Length		<p>from service wall desk-height outlet module to perpendicular panel with powered base.</p> <p>Specify jumper cables between outlet modules. Application dimension indicates maximum wall cover width between outlets covers at the same height. Excess cable may be stored in interior of wall frame.</p> <p>Base raceway power rail is suspended between panel supports 3" above floor. 48" wall accepts one 12" rail, 60" wall accepts one 24" rail, 72" accepts two 12" rails. 12" rails may also be inserted at any straight connection.</p> <p>Specify 12" base power connector between 12" rails in a 72"W wall base, or straddling a wall connection. Specify 36" base power connector to pass through a connection between adjacent powered bases.</p>

# Service wall power components

## 2+2 raceway other hardware

description	type	w	d	h	pattern no.	no finish
Base raceway power rail	48" or 72" frame	12"	–	2"	<b>AR1 E2</b>	\$128.
	60" frame	24"	–	2"	<b>AR1 E3</b>	151.
Base power connector	Within a frame	12"			<b>AR1 EPC1</b>	58.
	Frame to frame	36"			<b>AR1 EPC2</b>	70.



### Order Code

Example:	<b>AR1 ET1</b>
<b>AR1</b>	Raceway
<b>E</b>	2+2
<b>T</b>	Transitional
<b>1</b>	Length

### Specification Information

Raceway components distribute four 20-amp circuits at desk height or panel base: two convenience circuits and two protected circuits, with separate grounds and heavy duty #10 neutrals.

**NOTE: The City of New York does not approve use of liquid-tight PVC conduit.** For installations anywhere in the City of New York, specify NYC infeed kits (AR1 EPH1 or 2, AR1 TPH1 or 2), which do not contain PVC. To connect power from the Currents service wall to wall-started panels: specify standard (not transitional) jumper cables. Also specify Raceway Cable Managers (AR1 RCM) to support power jumpers within the Currents wall base between the base or desk-height power module and the attached panel.

### Application Notes

Desk height power infeed connects from floor box to desk height outlets module inside service wall.

Ceiling infeed connects from ceiling junction box to desk height outlet module or to base power rail. Specify Currents ceiling infeed panel separately.

Base power infeed connects building power to either end of base raceway power rail.

Hardwire base infeed is approved for City of New York installations. Infeed includes junction box for base raceway and connector to desk height outlet module, or two connectors to adjacent base raceway power rails.

Transitional connectors connect Currents service wall power components to powered Morrison or Reff panels or Morrison Network desks. Application dimension indicates distance


from service wall desk-height outlet module to perpendicular panel with powered base.

Specify jumper cables between outlet modules. Application dimension indicates maximum wall cover width between outlets covers at the same height. Excess cable may be stored in interior of wall frame.

Base raceway power rail is suspended between panel supports 3" above floor. 48" wall accepts one 12" rail, 60" wall accepts one 24" rail, 72" accepts two 12" rails. 12" rails may also be inserted at any straight connection.

Specify 12" base power connector between 12" rails in a 72"W wall base, or straddling a wall connection. Specify 36" base power connector to pass through a connection between adjacent powered bases.

Service wall power components  
 3+3 raceway  
 outlet module, central switch and outlets

description	type	w	d	h	pattern no.	black	orange (-O) or orange triangle (-T)	no finish
Desk-height outlet module	21"-48"H	6"	1"	9"	<b>AR1 TOM</b>			\$139.
								
Central switch	21-48"H				<b>AR1-ELS-B</b>			337.
Duplex outlet	Circuit A				<b>AR1 DA</b>	29.		
	Circuit B				<b>AR1 DB</b>	29.		
	Circuit C				<b>AR1 DC</b>	29.		
	Circuit X				<b>AR1 DX</b>	29.	34.	
	Circuit Y				<b>AR1 DY</b>	29.	34.	
	Circuit Z				<b>AR1 DZ</b>	29.	34.	

Order Code	Specification Information	Application Notes
Example: <b>AR1 TOM</b> <b>AR1</b> Raceway <b>T</b> 3+3 <b>OM</b> Outlet Module	Raceway components distribute six 20-amp circuits at desk height or wall base: three convenience circuits and three protected circuits, with separate grounds and heavy-duty #10 neutrals.	<p>Service wall power may be distributed point-to-point between outlet modules at desk height or in the base raceway. Outlet modules and power rails accept two duplex outlets on each face and four connector/jumper cables.</p> <p>Modular desk-height outlet module mounts between frame studs at any height from 21" - 48", above or below adjacent worksurfaces. Each 12"W frame bay can accept two outlet housings (up to four duplex outlets on each side.)</p> <p>Central switch controls three outlets inside wall frame for task or ambient lights. Switch occupies right-hand outlet opening in outlets cover on one side of wall.</p> <p>Central switch includes white rocker switch, connector to adjacent outlet module, and three simplex outlets on circuit B (2+2 or 3+3).</p>

Outlet modules and power rails accept two duplex outlets on each face. Specify outlets with black face for convenience circuits. Specify orange face or black with orange triangle for protected circuits with separate ground and neutral in building power supply.

Service wall power components  
 3+3 raceway  
 other hardware

description	type	w	d	h	pattern no.	no finish
Power infeeds	Base power	49"			<b>AR1 TPI2</b>	\$139.
	Desk height power	85"			<b>AR1 TPI5</b>	162.
	Ceiling infeed	145"			<b>AR1 TPIC</b>	197.
Hardwire base infeeds (NYC)	One connector				<b>AR1 TPH1</b>	255.
	Two connectors				<b>AR1 TPH2</b>	394.
Jumper cable	12" wall/36" desk	37"			<b>AR1 TJ1</b>	81.
	24" wall/48" desk	49"			<b>AR1 TJ2</b>	105.
	36" wall/60" desk	61"			<b>AR1 TJ3</b>	128.
	48" wall/72" desk	73"			<b>AR1 TJ4</b>	139.
	60" wall/84" desk	85"			<b>AR1 TJ5</b>	151.
	72" wall/96" desk	97"			<b>AR1 TJ6</b>	162.
	96" wall/120" desk	121"			<b>AR1 TJ8</b>	186.
	120" wall/144" desk	145"			<b>AR1 TJ10</b>	208.
Transitional connectors for Morrison or Reff	12"	61"			<b>AR1 TT1</b>	151.
	36"	85"			<b>AR1 TT3</b>	186.
	60"	109"			<b>AR1 TT5</b>	208.
	96"	133"			<b>AR1 TT8</b>	232.
Base raceway power rail	48" or 72" frame	12"			<b>AR1 T2</b>	151.
	60" frame	24"			<b>AR1 T3</b>	174.
Base power connectors	Within a frame	13"			<b>AR1 TPC1</b>	70.
	Frame to frame	37"			<b>AR1 TPC2</b>	81.

Order Code	Specification Information	Application Notes
Example: <b>AR1 TT5</b>	<p>Raceway components distribute six 20-amp circuits at desk height or wall base: three convenience circuits and three protected circuits, with separate grounds and heavy-duty #10 neutrals.</p> <p><b>NOTE: The City of New York does not approve use of liquid-tight PVC conduit.</b> For installations anywhere in the City of New York, specify NYC infeed kits (AR1 EPH1 or 2, AR1 TPH1 or 2), which do not contain PVC. To connect power from the Currents service wall to wall-started panels: specify standard (not transitional) jumper cables. Also specify Raceway Cable Managers (AR1 RCM) to support power jumpers within the Currents wall base between the base or desk-height power module and the attached panel.</p>	<p>Desk height power infeed connects from floor box to desk height outlets module inside service wall.</p> <p>Ceiling infeed connects from ceiling junction box to desk height outlet module or to base power rail. Specify Currents ceiling infeed panel separately.</p> <p>Base power infeed connects building power to either end of base raceway power rail.</p> <p>Hardwire base infeed is approved for City of New York installations. Infeed includes junction box for base raceway and connector to desk height outlet module, or two connectors to adjacent base raceway power rails.</p> <p>Transitional connectors connect Currents service wall power components to powered Morrison or Reff panels or Morrison Network desks.</p> <p>Application dimension indicates distance from service wall outlet module to perpendicular panel.</p>
<b>AR1</b> Raceway		
<b>T</b> 3+3		
<b>T</b> Transitional		
<b>5</b> Length		
	<p>Specify jumper cables between outlet modules. Application dimension indicates maximum wall cover width between outlets covers at the same height. Excess cable may be stored in interior of wall frame.</p> <p>Base raceway power rail is suspended between panel supports 3" above floor. 48" wall accepts one 12" rail, 60" wall accepts one 24" rail, 72" accepts two 12" rails. 12" rails may also be inserted at any straight connection.</p> <p>Specify 12" base power connector between 12" rails in a 72"W wall base, or straddling a wall connection. Specify 36" base power connector to pass through a connection between adjacent powered bases.</p>	



# Service wall power components replacement components for Equity





Currents

description	type	w	d	h	pattern no.	no finish	black	orange (-O) or orange triangle (-T)
Replacement duplexes for Equity	Circuit A				<b>ARE1 DA</b>		\$29.	
	Circuit B				<b>ARE1 DB</b>		29.	
	Circuit C				<b>ARE1 DC</b>		29.	
	Circuit X				<b>ARE1 DX</b>		29.	
	Circuit X, orange face or orange triangle				<b>ARE1 DX (O or T)</b>			34.
	Circuit Y				<b>ARE1 DY</b>		29.	
	Circuit Y, orange face or orange triangle				<b>ARE1 DY (O or T)</b>			34.
	Circuit Z				<b>ARE1 DZ</b>		29.	
	Circuit Z, orange face or orange triangle				<b>ARE1 DZ (O or T)</b>			34.
Transitional power connector Equity 2+2	12"		61"		<b>ARE1 ET1</b>		128.	
	36"		85"		<b>ARE1 ET3</b>		162.	
	60"		109"		<b>ARE1 ET5</b>		186.	
Transitional power connector Equity 3+3	12"		61"		<b>ARE1 TT1</b>		151.	
	36"		85"		<b>ARE1 TT3</b>		186.	
	60"		109"		<b>ARE1 TT5</b>		208.	
Replacement power infeed, Equity panel	2+2				<b>ARE1 EP1</b>		191.	
	3+3				<b>ARE1 TP1</b>		220.	

Order Code	Specification Information	Application Notes
Example: <b>ARE1 ET3</b>		
<b>ARE1</b>	Currents/Equity raceway	Replacement duplexes for Equity convert existing 3+1 terminal blocks in Equity panels to 2+2 when connected to and supplied by Currents service wall 2+2 or 3+3 power.  Transitional power connector connects service wall power components to Equity panel base power.  Application dimension indicates distance between service wall outlet module (at 30"-39"H) and perpendicular panel.  Specify replacement power infeed when supplying power to Currents service wall from Equity panel base infeed.
<b>E</b>	Eight wire 2+2	
<b>T</b>	Transitional connector	
<b>3</b>	Width	

# Service wall power components accessories, ceiling infeed panel

Currents

description	w	d	h	pattern no.	no finish	paint
Cable clips for wall studs (100) 	1/4"	1/2"	1 1/2"	<b>AR1 PCC 100</b>	\$58.	
High capacity cable holders (10) 	1"	3/4"	2 1/2"	<b>AR1 HCC H10</b>	24.	
Raceway cable managers (10) 				<b>AR1 RCM 10</b>	46.	
Ceiling infeed panel for stabilizer end cabinet, T-end or power monument 	3 1/2"	5"	48"	<b>APX CIP4 ( )</b>		344.
	3 1/2"	5"	72"	<b>APX CIP6 ( )</b>		402.
	3 1/2"	5"	96"	<b>APX CIP8 ( )</b>		459.

Order Code	Specification Information	Application Notes
Example: <b>AR1 PCC 100</b>	Cable clips and cable managers are black plastic.	Specify cable clips, approximately 50 per wall frame to support and manage cables on the face of studs in the Currents wall frame. Each clip manages up to 14 Category 5 or fiber optic cables; four clips attach between 21"-30", 30"-39", 39"-48"; six between 48"-64"H. Only two clips fit behind a cable tray cover at the 21"-30" height.
<b>AR1</b> Raceway	Cable holders are light grey plastic.	
<b>PCC</b> Cable clip	<i>Specify painted finish for hardwire outlets cover or ceiling infeed panel.</i>	
<b>100</b> Size/Quantity		Specify high capacity cable holders approximately 20 per wall frame to support and manage larger bundles of cables. Each holds up to 55 Cat 5 cables; two holders attach to studs at each 9" level; three holders at the 16" level of a 64"H wall. Only one holder fits behind a cable tray cover at the 21"-30" height (upside down).
		Raceway cable managers are U-shape cable supports that snap into the underside of the panel frame. Plan one per foot foot to contain data cables or power jumpers in the base raceway.
		Ceiling infeed panel attaches to end of spine adjacent to stabilizer end cabinet or Currents, Morrison, or Ref T-end panel with 3 1/2" extension, or to power monument. Center channel, 2" x 2 1/2", accommodates one or two power infeed cables. Each side channel is 1 1/2" x 3 1/2" lay-in cable raceway, for continuous lay-in cabling from ceiling to wall surface.
		Specify ceiling infeed separately.

# Service wall power components

## PDC modules, modular communications





Currents

description	type	application	pattern no.	black
PDC Module accessories	PDC Module extender (set of 10)		<b>MR3 PDCX</b>	\$105.
AMP PDC Modules	Faceplate and 4 Enhanced Category 5 outlets		<b>AMC PDC 5E4N</b>	156.
AMP Modular components	Blank insert (10)		<b>AMC B10</b>	17.
	Category 3 outlet (RJ11 six position)	Punch-down back	<b>AMC O3</b>	17.
	Category 6 quantum (RJ45, 110)	Punch-down back	<b>AMC O6</b>	38.
	Communications faceplates	AMP outlet faceplate, 2-port	<b>AMC FP2 (L or N)</b>	17.
	Communications faceplates	AMP outlet faceplate, 3-port	<b>AMC FP3 (L or N)</b>	17.
	Enhanced Category 5 outlet (RJ45, 110)	Punch-down back	<b>AMC O5E</b>	25.
	Fiber optics outlet 50/125 micron fiber jack		<b>AMC OF500</b>	128.
	Fiber optics outlet 62.5/125 micron fiber jack		<b>AMC OF625</b>	128.
AMP modular communications/ zone distribution	AMP NetConnect consolidation point, 12-port		<b>AMC5 CP12</b>	493.
	AMP NetConnect mounting bracket		<b>AMB CP12-AMP</b>	34.
	AMP pre-terminated outlet cable, 20'		<b>AMC5 OC20(A or B)</b>	63.
	AMP pre-terminated outlet cable, 30'		<b>AMC5 OC30(A or B)</b>	70.
	AMP pre-terminated outlet cable, 40'		<b>AMC5 OC40(A or B)</b>	75.
	AMP pre-terminated outlet cable, 50'		<b>AMC5 OC50(A or B)</b>	80.
Lucent PDC Modules	Communications faceplate and 2 Category 5 110 outlets (10)		<b>MR3 ATT2</b>	633.
	Communications faceplate and 3 Category 5 110 outlets (10)		<b>MR3 ATT3</b>	894.
Lucent zone distribution	Hinged mounting brackets for 24-port consolidation point (pair)		<b>AMB CP24 LUC</b>	90.
Outlet fillers (Set of 10)			<b>AR OF</b>	26.

Order Code	Specification Information	Application Notes
Example: <b>MR3 AMP3B</b>	<i>For AMP pre-terminated outlet cables specify:</i>	PDC Modules are preconfigured or created from modular components and faceplate that snaps into service wall outlets cover, raceway cover, desk service beam, credenza stanchion outlets cover, or power monument.
<b>MR3</b> Raceway/PDC	T568A or T568B wiring.	
<b>AMP</b> Type	<i>For AMP outlet faceplates specify:</i>	See Morrison price list for additional PDC module configurations.
<b>3B</b> Configuration	L Light grey N Black	
	Amp outlets are black.	Specify PDC Module extenders for adequate clearance between modules in back-to-back applications, or for fiber optics ST connectors.
	Lucent faceplates are light grey.	
		Specify blank filler plates for any unused outlet openings in outlets covers or raceway covers.
		AMP NetConnect mounting bracket supports one 12-port consolidation point on stud or two in stabilizer end cabinet.
		AMP pre-terminated outlet cables include outlet and plug into consolidation point. AMP outlet faceplate snaps into outlets cover and supports cable outlet.
		Each Lucent mounting bracket supports one 24-port consolidation point and is hinged for easy access. Bracket mounts on service wall frame or stabilizer end cabinet.

Worksurfaces, universal  
straight, curved and flat front  
1 3/4" wire drop

Currents

description	w	d	h	pattern no.	lam.	V2	V3
24"D straight worksurface, curved front 	24"	22 1/4"	1"	<b>AW1 S2424 ( )</b>	\$225.	\$337.	\$450.
	30"	22 1/4"	1"	<b>AW1 S3024 ( )</b>	248.	371.	495.
	36"	22 1/4"	1"	<b>AW1 S3624 ( )</b>	269.	406.	540.
	42"	22 1/4"	1"	<b>AW1 S4224 ( )</b>	293.	439.	586.
	48"	22 1/4"	1"	<b>AW1 S4824 ( )</b>	315.	472.	630.
	60"	22 1/4"	1"	<b>AW1 S6024 ( )</b>	360.	540.	721.
	66"	22 1/4"	1"	<b>AW1 S6624 ( )</b>	383.	573.	764.
	72"	22 1/4"	1"	<b>AW1 S7224 ( )</b>	406.	607.	810.
	84"	22 1/4"	1"	<b>AW1 S8424 ( )</b>	450.	675.	900.
30"D straight worksurface, curved front 	36"	28 1/4"	1"	<b>AW1 S3630 ( )</b>	304.	456.	607.
	48"	28 1/4"	1"	<b>AW1 S4830 ( )</b>	348.	523.	698.
	60"	28 1/4"	1"	<b>AW1 S6030 ( )</b>	406.	607.	810.
	72"	28 1/4"	1"	<b>AW1 S7230 ( )</b>	472.	708.	945.
	84"	28 1/4"	1"	<b>AW1 S8430 ( )</b>	541.	811.	1,082.
24"D Straight worksurface, flat front 	24"	22 1/4"	1"	<b>AW1 F2424 ( )</b>	225.	337.	450.
	30"	22 1/4"	1"	<b>AW1 F3024 ( )</b>	248.	371.	495.
	36"	22 1/4"	1"	<b>AW1 F3624 ( )</b>	269.	406.	540.
	42"	22 1/4"	1"	<b>AW1 F4224 ( )</b>	293.	439.	586.
	48"	22 1/4"	1"	<b>AW1 F4824 ( )</b>	315.	472.	630.
	60"	22 1/4"	1"	<b>AW1 F6024 ( )</b>	360.	540.	721.
	66"	22 1/4"	1"	<b>AW1 F6624 ( )</b>	383.	573.	764.
	72"	22 1/4"	1"	<b>AW1 F7224 ( )</b>	406.	607.	810.
	84"	22 1/4"	1"	<b>AW1 F8424 ( )</b>	450.	675.	900.
30"D straight worksurface, flat front 	36"	28 1/4"	1"	<b>AW1 F3630 ( )</b>	304.	456.	607.
	48"	28 1/4"	1"	<b>AW1 F4830 ( )</b>	348.	523.	698.
	60"	28 1/4"	1"	<b>AW1 F6030 ( )</b>	406.	607.	810.
	72"	28 1/4"	1"	<b>AW1 F7230 ( )</b>	472.	708.	945.
	84"	28 1/4"	1"	<b>AW1 F8430 ( )</b>	541.	811.	1,082.

**Order Code**

Example: **AW1 S4830 117**

<b>AW1</b>	Worksurface
<b>S</b>	Straight
<b>48</b>	Width
<b>30</b>	Depth
<b>117</b>	Top finish

**Specification Information**

Worksurface edges are trim grey.  
*Specify top finish*

**Application Notes**

Worksurfaces may be end-supported, cantilevered from Currents service wall, or supported by C-leg or pedestal at each end. Universal worksurfaces are interchangeable with Currents desks. Specify supports separately.

Straight worksurfaces have a 1"D curved front for additional surface area, or a flat front. Flat front allows two straight worksurfaces to meet at right angles.

24"D straight worksurfaces may be cantilevered with two cantilever brackets.


24" and 30"D straight worksurfaces may be end supported with two Currents end support brackets.

# Worksurfaces, universal

Currents

corner

1 3/4" wire drop

description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces 	42"	42"	1"	<b>AW1 C4242 S ( )</b>	\$502.	\$752.	\$1,003.
	48"	48"	1"	<b>AW1 C4848 S ( )</b>	557.	836.	1,114.
	60"	60"	1"	<b>AW1 C6060 S ( )</b>	780.	n/a	n/a
30"D both sides corner worksurfaces	42"	42"	1"	<b>AW1 C4242 D ( )</b>	502.	752.	1,003.
	48"	48"	1"	<b>AW1 C4848 D ( )</b>	557.	836.	1,114.
	60"	60"	1"	<b>AW1 C6060 D ( )</b>	780.	n/a	n/a
30"D left/24"D right corner worksurfaces	42"	42"	1"	<b>AW1 C4242 L ( )</b>	502.	752.	1,003.
	48"	48"	1"	<b>AW1 C4848 L ( )</b>	557.	836.	1,114.
	60"	60"	1"	<b>AW1 C6060 L ( )</b>	780.	n/a	n/a
24"D left/30"D right corner worksurfaces	42"	42"	1"	<b>AW1 C4242 R ( )</b>	502.	752.	1,003.
	48"	48"	1"	<b>AW1 C4848 R ( )</b>	557.	836.	1,114.
	60"	60"	1"	<b>AW1 C6060 R ( )</b>	780.	n/a	n/a

## Order Code

Example: <b>AW1 C4848S 117</b>
<b>AW1</b> Worksurface
<b>C</b> Corner
<b>48</b> Width left
<b>48</b> Width right
<b>S</b> Depth left and right
<b>117</b> Top finish

## Specification Information

Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.

### Worksurface depths:

S	24"D both sides
L	30"D left/24"D right
R	24"D left/30"D right
D	30"D both sides

Specify top finish.  
Plastic laminates:

Worksurface edges are trim grey. Clear maple laminate is not available on 60w x 60d corner tops.




## Application Notes

Universal worksurfaces are interchangeable with Currents desks. Specify worksurface supports separately.

Corner worksurfaces may be supported by two cantilever brackets on one back edge in combination with C-leg or pedestal support on other end.

Worksurfaces, universal  
*extended corner*  
*1 3/4" wire drop*  
*extended left*

Currents

description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces, extended left 	60"	36"	1"	<b>AW1 C6036 S ( )</b>	\$557.	\$836.	\$1,114.
	60"	42"	1"	<b>AW1 C6042 S ( )</b>	613.	918.	1,224.
	60"	48"	1"	<b>AW1 C6048 S ( )</b>	669.	1,003.	1,336.
	72"	36"	1"	<b>AW1 C7236 S ( )</b>	669.	1,003.	1,336.
	72"	42"	1"	<b>AW1 C7242 S ( )</b>	724.	1,086.	1,448.
	72"	48"	1"	<b>AW1 C7248 S ( )</b>	780.	1,170.	1,560.
	84"	36"	1"	<b>AW1 C8436 S ( )</b>	780.	1,170.	1,560.
	84"	42"	1"	<b>AW1 C8442 S ( )</b>	836.	1,253.	1,671.
84"	48"	1"	<b>AW1 C8448 S ( )</b>	891.	1,336.	1,783.	
30"D both sides corner worksurfaces, extended left 	60"	48"	1"	<b>AW1 C6048 D ( )</b>	725.	1,086.	1,449.
	72"	48"	1"	<b>AW1 C7248 D ( )</b>	836.	1,253.	1,671.
	84"	48"	1"	<b>AW1 C8448 D ( )</b>	947.	1,422.	1,895.
30"D left/24"D right corner worksurfaces, extended left 	60"	42"	1"	<b>AW1 C6042 L ( )</b>	669.	1,003.	1,336.
	60"	48"	1"	<b>AW1 C6048 L ( )</b>	725.	1,086.	1,449.
	72"	42"	1"	<b>AW1 C7242 L ( )</b>	780.	1,169.	1,560.
	72"	48"	1"	<b>AW1 C7248 L ( )</b>	836.	1,253.	1,671.
	84"	42"	1"	<b>AW1 C8442 L ( )</b>	891.	1,336.	1,783.
	84"	48"	1"	<b>AW1 C8448 L ( )</b>	947.	1,422.	1,895.
24"D left/30"D right corner worksurfaces, extended left	60"	42"	1"	<b>AW1 C6042 R ( )</b>	669.	1,003.	1,336.
	60"	48"	1"	<b>AW1 C6048 R ( )</b>	725.	1,086.	1,449.
	72"	42"	1"	<b>AW1 C7242 R ( )</b>	780.	1,169.	1,560.
	72"	48"	1"	<b>AW1 C7248 R ( )</b>	836.	1,253.	1,671.
	84"	42"	1"	<b>AW1 C8442 R ( )</b>	891.	1,336.	1,783.
	84"	48"	1"	<b>AW1 C8448 R ( )</b>	947.	1,422.	1,895.

**Order Code**

Example: <b>AW1 C6036S 117</b>
<b>AW1</b> Worksurface
<b>C</b> Corner
<b>60</b> Width left
<b>36</b> Width right
<b>S</b> Depth left and right
<b>117</b> Top finish

**Specification Information**

Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.

*Worksurface depths:*

S 24"D both sides  
 L 30"D left/24"D right  
 R 24"D left/30"D right  
 D 30"D both sides

Worksurface edges are trim grey.

**Application Notes**




Universal worksurfaces are interchangeable with Currents desks. Specify worksurface supports separately.

Corner worksurfaces may be supported by two cantilever brackets on one back edge in combination with C-leg or pedestal support on other end.

Specify top finish.

Worksurfaces, universal  
*extended corner*  
*1 3/4" wire drop*  
*extended right*

Currents

description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces, extended right 	36"	60"	1"	<b>AW1 C3660 S ( )</b>	\$557.	\$836.	\$1,114.
	36"	72"	1"	<b>AW1 C3672 S ( )</b>	669.	1,003.	1,336.
	36"	84"	1"	<b>AW1 C3684 S ( )</b>	780.	1,170.	1,560.
	42"	60"	1"	<b>AW1 C4260 S ( )</b>	613.	918.	1,224.
	42"	72"	1"	<b>AW1 C4272 S ( )</b>	724.	1,086.	1,448.
	42"	84"	1"	<b>AW1 C4284 S ( )</b>	836.	1,253.	1,671.
	48"	60"	1"	<b>AW1 C4860 S ( )</b>	669.	1,003.	1,336.
	48"	72"	1"	<b>AW1 C4872 S ( )</b>	780.	1,170.	1,560.
	48"	84"	1"	<b>AW1 C4884 S ( )</b>	891.	1,336.	1,783.
30"D both sides corner worksurfaces, extended right 	48"	60"	1"	<b>AW1 C4860 D ( )</b>	725.	1,086.	1,449.
	48"	72"	1"	<b>AW1 C4872 D ( )</b>	836.	1,253.	1,671.
	48"	84"	1"	<b>AW1 C4884 D ( )</b>	947.	1,422.	1,895.
24"D left/30"D right corner worksurfaces, extended right 	42"	60"	1"	<b>AW1 C4260 R ( )</b>	669.	1,003.	1,336.
	42"	72"	1"	<b>AW1 C4272 R ( )</b>	780.	1,169.	1,560.
	42"	84"	1"	<b>AW1 C4284 R ( )</b>	891.	1,336.	1,783.
	48"	60"	1"	<b>AW1 C4860 R ( )</b>	725.	1,086.	1,449.
	48"	72"	1"	<b>AW1 C4872 R ( )</b>	836.	1,253.	1,671.
	48"	84"	1"	<b>AW1 C4884 R ( )</b>	947.	1,422.	1,895.
30"D left/24"D right corner worksurfaces, extended right	42"	60"	1"	<b>AW1 C4260 L ( )</b>	669.	1,003.	1,336.
	42"	72"	1"	<b>AW1 C4272 L ( )</b>	780.	1,169.	1,560.
	42"	84"	1"	<b>AW1 C4284 L ( )</b>	891.	1,336.	1,783.
	48"	60"	1"	<b>AW1 C4860 L ( )</b>	725.	1,086.	1,449.
	48"	72"	1"	<b>AW1 C4872 L ( )</b>	836.	1,253.	1,671.
	48"	84"	1"	<b>AW1 C4884 L ( )</b>	947.	1,422.	1,895.

**Order Code**

Example: <b>AW1 C3660S 117</b>
<b>AW1</b> Worksurface
<b>C</b> Corner
<b>36</b> Width left
<b>60</b> Width right
<b>S</b> Depth left and right
<b>117</b> Top finish

**Specification Information**

Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.

*Worksurface depths:*

S 24"D both sides  
 L 30"D left/24"D right  
 R 24"D left/30"D right  
 D 30"D both sides

Worksurface edges are trim grey.

**Application Notes**

Universal worksurfaces are interchangeable with Currents desks. Specify worksurface supports separately.

Corner worksurfaces may be supported by two cantilever brackets on one back edge in combination with C-leg or pedestal support on other end.



Specify top finish.

# Worksurfaces, universal

Currents

## P-shape

1 3/4" wire drop

description	w	d	h	pattern no.	lam.	V2	V3
P-shape surfaces, extended left 	75"	48"	1"	<b>AW1 P7548 S ( )</b>	\$891.	\$1,336.	\$1,783.
	87"	48"	1"	<b>AW1 P8748 S ( )</b>	1,003.	1,505.	2,005.
P-shape surfaces, extended right 	48"	78"	1"	<b>AW1 P4875 S ( )</b>	891.	1,336.	1,783.
	48"	87"	1"	<b>AW1 P4887 S ( )</b>	1,003.	1,505.	2,005.

### Order Code

Example: <b>AW1 P7548S 117</b>
<b>AW1</b> Worksurface
<b>P</b> P-shape
<b>75</b> Width left
<b>48</b> Width right
<b>S</b> Depth of return
<b>117</b> Top finish

### Specification Information

Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.

Specify top finish.

Worksurface edges are trim grey.

### Application Notes



P-shape worksurfaces may be cantilevered from service wall along 48" edge, and supported by 24"D C-leg at conference end. Specify two cantilever brackets and C-leg separately.

All P-shape worksurfaces correspond to a 24"D adjacent straight or corner worksurface.





Currents worksurfaces for Morrison  
*straight, flat front*  
*3/8" wire drop and grommet*

description	w	d	h	pattern no.	lam.	V2	V3
24"D straight worksurface, flat front 	24"	23 3/8"	1"	<b>AWM2 F2424</b> ( ) ( )	\$225.	\$337.	\$450.
	30"	23 3/8"	1"	<b>AWM2 F3024</b> ( ) ( )	248.	371.	495.
	36"	23 3/8"	1"	<b>AWM2 F3624</b> ( ) ( )	269.	406.	540.
	42"	23 3/8"	1"	<b>AWM2 F4224</b> ( ) ( )	293.	439.	586.
	48"	23 3/8"	1"	<b>AWM2 F4824</b> ( ) ( )	315.	472.	630.
	54"	23 3/8"	1"	<b>AWM2 F5424</b> ( ) ( )	337.	508.	675.
	60"	23 3/8"	1"	<b>AWM2 F6024</b> ( ) ( )	360.	540.	721.
	66"	23 3/8"	1"	<b>AWM2 F6624</b> ( ) ( )	383.	573.	764.
	72"	23 3/8"	1"	<b>AWM2 F7224</b> ( ) ( )	406.	607.	810.
	78"	23 3/8"	1"	<b>AWM2 F7824</b> ( ) ( )	427.	642.	855.
	84"	23 3/8"	1"	<b>AWM2 F8424</b> ( ) ( )	450.	675.	900.
	90"	23 3/8"	1"	<b>AWM2 F9024</b> ( ) ( )	471.	707.	944.
96"	23 3/8"	1"	<b>AWM2 F9624</b> ( ) ( )	495.	742.	990.	
30"D straight worksurface, flat front 	30"	29 3/8"	1"	<b>AWM2 F3030</b> ( ) ( )	281.	421.	562.
	36"	29 3/8"	1"	<b>AWM2 F3630</b> ( ) ( )	304.	456.	607.
	42"	29 3/8"	1"	<b>AWM2 F4230</b> ( ) ( )	327.	489.	653.
	48"	29 3/8"	1"	<b>AWM2 F4830</b> ( ) ( )	348.	523.	698.
	54"	29 3/8"	1"	<b>AWM2 F5430</b> ( ) ( )	376.	565.	754.
	60"	29 3/8"	1"	<b>AWM2 F6030</b> ( ) ( )	406.	607.	810.
	66"	29 3/8"	1"	<b>AWM2 F6630</b> ( ) ( )	439.	658.	878.
	72"	29 3/8"	1"	<b>AWM2 F7230</b> ( ) ( )	472.	708.	945.
	78"	29 3/8"	1"	<b>AWM2 F7830</b> ( ) ( )	506.	758.	1,011.
	90"	29 3/8"	1"	<b>AWM2 F9030</b> ( ) ( )	573.	860.	1,147.
	96"	29 3/8"	1"	<b>AWM2 F9630</b> ( ) ( )	607.	911.	1,215.

**Order Code**

Example: <b>AWM2 F4830 117 5</b>
<b>AWM2</b> Worksurface
<b>F</b> Flat
<b>48</b> Width
<b>30</b> Depth
<b>117</b> Top finish
<b>5</b> Trim finish

**Specification Information**

Specify top finish first, followed by trim finish.

**Application Notes**

Worksurfaces are sized for Morrison panel-based applications and may be supported by Morrison panel planning brackets or end-supported from Currents wall. 24"D straight tops may also be cantilevered from Currents service wall. Underside of worksurfaces is drilled to accept all Morrison panel-planning brackets, Morrison and Currents pedestals, and worksurface stiffeners. 24"D straight tops are also drilled to accept Currents wall cantilever brackets.

Currents worksurfaces for Morrison require stiffener when the span between structural supports exceeds 36". Specify worksurface stiffeners and supports separately.

Currents worksurfaces for Morrison cannot be used in conjunction with Morrison Network desk supports.

Straight worksurfaces have a curved front for additional surface area, or a flat front. Flat front allows two straight worksurfaces to meet at right angles.



Actual worksurface depth is 3/8" less than nominal 24" and 30" for cable clearance.

All worksurfaces include one edge grommet, centered at rear of worksurface, with maximum clearance of 1 3/8".

Trim finish light grey and pumice can only be ordered in conjunction with matching plastic laminates. Trim grey and black trim finish can be ordered with all laminates and veneers.



Currents for Morrison worksurfaces feature crisp 90° corners eliminating the corner kick detail typical of Currents universal and desk tops. Eliminating the corner kick will facilitate the use of brackets, pedestals and end panels at the side edge of worksurfaces and will eliminate undesired gaps at worksurface joints.

*extended corner  
3/8" wire drop and grommet  
extended left*

description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces, extended left 	60"	36"	1"	<b>AWM2 C6036 S ( ) ( )</b>	\$557.	\$836.	\$1,114.
	60"	42"	1"	<b>AWM2 C6042 S ( ) ( )</b>	613.	918.	1,224.
	60"	48"	1"	<b>AWM2 C6048 S ( ) ( )</b>	669.	1,003.	1,336.
	72"	36"	1"	<b>AWM2 C7236 S ( ) ( )</b>	669.	1,003.	1,336.
	72"	42"	1"	<b>AWM2 C7242 S ( ) ( )</b>	724.	1,086.	1,448.
	72"	48"	1"	<b>AWM2 C7248 S ( ) ( )</b>	780.	1,170.	1,560.
	84"	48"	1"	<b>AWM2 C8448 S ( ) ( )</b>	891.	1,336.	1,783.
30"D both sides corner worksurfaces, extended left	60"	48"	1"	<b>AWM2 C6048 D ( ) ( )</b>	725.	1,086.	1,449.
	72"	48"	1"	<b>AWM2 C7248 D ( ) ( )</b>	836.	1,253.	1,671.
	84"	48"	1"	<b>AWM2 C8448 D ( ) ( )</b>	947.	1,422.	1,895.
30"D left/24"D right corner worksurfaces, extended left 	60"	42"	1"	<b>AWM2 C6042 L ( ) ( )</b>	669.	1,003.	1,336.
	60"	48"	1"	<b>AWM2 C6048 L ( ) ( )</b>	725.	1,086.	1,449.
	72"	42"	1"	<b>AWM2 C7242 L ( ) ( )</b>	780.	1,169.	1,560.
	72"	48"	1"	<b>AWM2 C7248 L ( ) ( )</b>	836.	1,253.	1,671.
	84"	48"	1"	<b>AWM2 C8448 L ( ) ( )</b>	947.	1,422.	1,895.
24"D left/30"D right corner worksurfaces, extended left	60"	42"	1"	<b>AWM2 C6042 R ( ) ( )</b>	669.	1,003.	1,336.
	60"	48"	1"	<b>AWM2 C6048 R ( ) ( )</b>	725.	1,086.	1,449.
	72"	42"	1"	<b>AWM2 C7242 R ( ) ( )</b>	780.	1,169.	1,560.
	72"	48"	1"	<b>AWM2 C7248 R ( ) ( )</b>	836.	1,253.	1,671.
	84"	48"	1"	<b>AWM2 C8448 R ( ) ( )</b>	947.	1,422.	1,895.





Order Code	Specification Information	Application Notes
Example: <b>AWM2 C6036S 117 N</b>		
<b>AWM2</b> Worksurface	Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.	Worksurfaces are sized for Morrison panel-based applications and may be supported by Morrison panel-planning brackets or end-supported and cantilevered from Currents wall. Extended side may also be supported with Currents C-legs. Underside of worksurface is drilled to accept all Morrison panel-planning brackets, Morrison and Currents pedestals, worksurface stiffeners and Currents C-leg on the extended side.  Currents worksurfaces for Morrison require stiffener when the span between structural supports exceeds 36". Specify worksurface stiffeners and supports separately.  Currents worksurfaces for Morrison cannot be used in conjunction with Morrison Network desk supports.  Actual worksurface is 3/8" less than nominal 24" and 30" for cable clearance.  All worksurfaces include two edge grommets, centered on back edges of worksurface, with maximum clearance of 1 5/8."
<b>C</b> Corner		
<b>60</b> Width left		
<b>36</b> Width right		
<b>S</b> Depth left and right		
<b>117</b> Top finish	<i>Worksurface depths:</i> S 24"D both sides L 30"D left/24"D right R 24"D left/30"D right D 30"D both sides	
<b>N</b> Trim finish	Specify top finish first, followed by trim finish.	
	Trim finish light grey and pumice can only be ordered in conjunction with matching plastic laminates. Trim grey and black trim finish can be ordered with all laminates and veneers. Currents for Morrison worksurfaces feature crisp 90° corners eliminating the corner kick detail typical of Currents universal and desk tops. Eliminating the corner kick will facilitate the use of brackets, pedestals and end panels at the side edge of worksurfaces and will eliminate undesired gaps at worksurface joints.	

*extended corner  
3/8" wire drop and grommet  
extended right*

description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces extended right 	36"	60"	1"	<b>AWM2 C3660 S ( ) ( )</b>	\$557.	\$836.	\$1,114.
	36"	72"	1"	<b>AWM2 C3672 S ( ) ( )</b>	669.	1,003.	1,336.
	42"	60"	1"	<b>AWM2 C4260 S ( ) ( )</b>	613.	918.	1,224.
	42"	72"	1"	<b>AWM2 C4272 S ( ) ( )</b>	724.	1,086.	1,448.
	48"	60"	1"	<b>AWM2 C4860 S ( ) ( )</b>	669.	1,003.	1,336.
	48"	72"	1"	<b>AWM2 C4872 S ( ) ( )</b>	780.	1,170.	1,560.
	48"	84"	1"	<b>AWM2 C4884 S ( ) ( )</b>	891.	1,336.	1,783.
30"D both sides corner worksurfaces, extended right	48"	60"	1"	<b>AWM2 C4860 D ( ) ( )</b>	725.	1,086.	1,449.
	48"	72"	1"	<b>AWM2 C4872 D ( ) ( )</b>	836.	1,253.	1,671.
	48"	84"	1"	<b>AWM2 C4884 D ( ) ( )</b>	947.	1,422.	1,895.
24"D left/30"D right corner worksurfaces, extended right 	42"	60"	1"	<b>AWM2 C4260 R ( ) ( )</b>	669.	1,003.	1,336.
	42"	72"	1"	<b>AWM2 C4272 R ( ) ( )</b>	780.	1,169.	1,560.
	48"	60"	1"	<b>AWM2 C4860 R ( ) ( )</b>	725.	1,086.	1,449.
	48"	72"	1"	<b>AWM2 C4872 R ( ) ( )</b>	836.	1,253.	1,671.
	48"	84"	1"	<b>AWM2 C4884 R ( ) ( )</b>	947.	1,422.	1,895.
30"D left/24"D right corner worksurfaces, extended right	42"	60"	1"	<b>AWM2 C4260 L ( ) ( )</b>	669.	1,003.	1,336.
	42"	72"	1"	<b>AWM2 C4272 L ( ) ( )</b>	780.	1,169.	1,560.
	48"	60"	1"	<b>AWM2 C4860 L ( ) ( )</b>	725.	1,086.	1,449.
	48"	72"	1"	<b>AWM2 C4872 L ( ) ( )</b>	836.	1,253.	1,671.
	48"	84"	1"	<b>AWM2 C4884 L ( ) ( )</b>	947.	1,422.	1,895.

Order Code	Specification Information	Application Notes
Example: <b>AWM2 C3660S 4 N</b>		
<b>AWM2</b> Worksurface	Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.	Worksurfaces are sized for Morrison panel-based applications and may be supported by Morrison panel-planning brackets or end-supported and cantilevered from Currents wall. Extended side may also be supported with Currents C-legs. Underside of work surface is drilled to accept all Morrison panel-planning brackets, Morrison and Currents pedestals, work surface stiffeners and Currents C-leg on the extended side.  Currents worksurfaces for Morrison require stiffener when the span between structural supports exceeds 36". Specify work surface stiffeners and supports separately.  Currents worksurfaces for Morrison cannot be used in conjunction with Morrison Network desk supports.  Actual work surface is 3/8" less than nominal 24" and 30" for cable clearance.  All worksurfaces include two edge grommets, centered on back edges of work surface, with maximum clearance of 1 5/8."
<b>C</b> Corner		
<b>36</b> Width left		
<b>60</b> Width right		
<b>S</b> Depth left and right		
<b>4</b> Top finish	<i>Worksurface depths:</i> S 24"D both sides L 30"D left/24"D right R 24"D left/30"D right D 30"D both sides	
<b>N</b> Trim finish	Specify top finish first, followed by trim finish.	
	Trim finish light grey and pumice can only be ordered in conjunction with matching plastic laminates. Trim grey and black trim finish can be ordered with all laminates and veneers. Currents for Morrison worksurfaces feature crisp 90° corners eliminating the corner kick detail typical of Currents universal and desk tops. Eliminating the corner kick will facilitate the use of brackets, pedestals and end panels at the side edge of worksurfaces and will eliminate undesired gaps at work surface joints.	

Currents worksurfaces for Morrison  
*corner and P-shapes*  
*3/8" wire drop and grommet*

description	w	d	h	pattern no.	lam.	V2	V3
24"D both sides corner worksurfaces 	42"	42"	1"	<b>AWM2 C4242 S ( ) ( )</b>	\$502.	\$752.	\$1,003.
	48"	48"	1"	<b>AWM2 C4848 S ( ) ( )</b>	557.	836.	1,114.
	60"	60"	1"	<b>AWM2 C6060 S ( ) ( )</b>	780.	n/a	n/a
30"D both sides corner worksurfaces 	42"	42"	1"	<b>AWM2 C4242 D ( ) ( )</b>	502.	752.	1,003.
	48"	48"	1"	<b>AWM2 C4848 D ( ) ( )</b>	557.	836.	1,114.
	60"	60"	1"	<b>AWM2 C6060 D ( ) ( )</b>	780.	n/a	n/a
30"D left/24"D right corner worksurfaces 	42"	42"	1"	<b>AWM2 C4242 L ( ) ( )</b>	502.	752.	1,003.
	48"	48"	1"	<b>AWM2 C4848 L ( ) ( )</b>	557.	836.	1,114.
	60"	60"	1"	<b>AWM2 C6060 L ( ) ( )</b>	780.	n/a	n/a
24"D left/30"D right corner worksurfaces 	42"	42"	1"	<b>AWM2 C4242 R ( ) ( )</b>	502.	752.	1,003.
	48"	48"	1"	<b>AWM2 C4848 R ( ) ( )</b>	557.	836.	1,114.
	60"	60"	1"	<b>AWM2 C6060 R ( ) ( )</b>	780.	n/a	n/a
P-shape surfaces, extended left 	75"	48"	1"	<b>AWM2 P7548 S ( ) ( )</b>	891.	1,336.	1,783.
	87"	48"	1"	<b>AWM2 P8748 S ( ) ( )</b>	1,003.	1,505.	2,005.

Order Code	Specification Information	Application Notes														
<p>Example: <b>AWM2 C4848S 117 N</b></p> <table border="1"> <tr> <td><b>AWM2</b></td> <td>Worksurface</td> </tr> <tr> <td><b>C</b></td> <td>Corner</td> </tr> <tr> <td><b>48</b></td> <td>Width left</td> </tr> <tr> <td><b>48</b></td> <td>Width right</td> </tr> <tr> <td><b>S</b></td> <td>Depth left and right</td> </tr> <tr> <td><b>117</b></td> <td>Top finish</td> </tr> <tr> <td><b>N</b></td> <td>Trim finish</td> </tr> </table>	<b>AWM2</b>	Worksurface	<b>C</b>	Corner	<b>48</b>	Width left	<b>48</b>	Width right	<b>S</b>	Depth left and right	<b>117</b>	Top finish	<b>N</b>	Trim finish	<p>Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.</p> <p>Specify top finish first, followed by trim finish.</p> <p><i>Worksurface depths:</i></p> <p>S 24"D both sides  L 30"D left/24"D right  R 24"D left/30"D right  D 30"D both sides</p> <p>Specify top finish first, followed by trim finish.</p>	<p>Trim finish light grey and pumice can only be ordered in conjunction with matching plastic laminates. Trim grey and black trim finish can be ordered with all laminates and veneers. Currents for Morrison worksurfaces feature crisp 90° corners eliminating the corner kick detail typical of Currents universal and desk tops. Eliminating the corner kick will facilitate the use of brackets, pedestals and end panels at the side edge of worksurfaces and will eliminate undesired gaps at worksurface joints.</p> <p>Clear Maple is not available on 60"W x 60"D corner worksurfaces.</p> <p>Worksurfaces are sized for Morrison panel-based applications and may be supported by Morrison panel-planning brackets or end-supported and cantilevered from Currents wall. Underside of worksurfaces is drilled to accept all Morrison panel-planning brackets, Morrison and Currents pedestals, and worksurface stiffeners. 24"D worksurfaces are also drilled to accept Currents wall cantilever brackets.</p> <p>Currents worksurfaces for Morrison require stiffener when the span between structural supports exceeds 36". Specify worksurface stiffeners and supports separately.</p> <p>All P-shaped worksurfaces correspond to a 24"D adjacent straight or corner work surface.</p> <p>Currents worksurfaces for Morrison cannot be used in conjunction with Morrison Network desk supports.</p> <p>Actual worksurface depth is 3/8" less than nominal 24" and 30" for cable clearance.</p> <p>All worksurfaces include two edge grommets, centered on back edges of work surface, with maximum clearance of 1 5/8".</p>
<b>AWM2</b>	Worksurface															
<b>C</b>	Corner															
<b>48</b>	Width left															
<b>48</b>	Width right															
<b>S</b>	Depth left and right															
<b>117</b>	Top finish															
<b>N</b>	Trim finish															

Currents worksurfaces for Morrison  
*corner and P-shapes*  
*3/8" wire drop and grommet*

description	w	d	h	pattern no.	lam.	V2	V3
P-shape surfaces, extended right	48"	75"	1"	<b>AWM2 P4875 S ( ) ( )</b>	\$891.	\$1,336.	\$1,783.
	48"	87"	1"	<b>AWM2 P4887 S ( ) ( )</b>	1,003.	1,505.	2,005.



Order Code	Specification Information	Application Notes
<p>Example: <b>AWM2 C4848S 117 N</b></p> <p><b>AWM2</b> Worksurface</p> <p><b>C</b> Corner</p> <p><b>48</b> Width left</p> <p><b>48</b> Width right</p> <p><b>S</b> Depth left and right</p> <p><b>117</b> Top finish</p> <p><b>N</b> Trim finish</p>	<p>Dimensions shown in "w" column are nominal width of left back edge. Dimensions shown in "d" column are nominal width of right back edge.</p> <p>Specify top finish first, followed by trim finish.</p> <p><i>Worksurface depths:</i></p> <p>S 24"D both sides            L 30"D left/24"D right            R 24"D left/30"D right            D 30"D both sides</p> <p>Specify top finish first, followed by trim finish.</p>	<p>Trim finish light grey and pumice can only be ordered in conjunction with matching plastic laminates. Trim grey and black trim finish can be ordered with all laminates and veneers. Currents for Morrison worksurfaces feature crisp 90° corners eliminating the corner kick detail typical of Currents universal and desk tops. Eliminating the corner kick will facilitate the use of brackets, pedestals and end panels at the side edge of worksurfaces and will eliminate undesired gaps at worksurface joints.</p> <p>Clear Maple is not available on 60"W x 60"D corner worksurfaces.</p> <p>Worksurfaces are sized for Morrison panel-based applications and may be supported by Morrison panel-planning brackets or end-supported and cantilevered from Currents wall. Underside of worksurfaces is drilled to accept all Morrison panel-planning brackets, Morrison and Currents pedestals, and worksurface stiffeners. 24"D worksurfaces are also drilled to accept Currents wall cantilever brackets.</p> <p>Currents worksurfaces for Morrison require stiffener when the span between structural supports exceeds 36". Specify worksurface stiffeners and supports separately.</p> <p>All P-shaped worksurfaces correspond to a 24"D adjacent straight or corner worksurface.</p> <p>Currents worksurfaces for Morrison cannot be used in conjunction with Morrison Network desk supports.</p> <p>Actual worksurface depth is 3/8" less than nominal 24" and 30" for cable clearance.</p> <p>All worksurfaces include two edge grommets, centered on back edges of worksurface, with maximum clearance of 1 5/8".</p>

# Currents worksurfaces for Morrison stiffeners

description	type	w	d	h	pattern no.	price
Stiffener for worksurfaces	36"	20"	1 1/2"	1"	<b>AWM1 S36</b>	\$43.
	42"	26"	1 1/2"	1"	<b>AWM1 S42</b>	45.
	48"	32"	1 1/2"	1"	<b>AWM1 S48</b>	47.
	60"	44"	1 1/2"	1"	<b>AWM1 S60</b>	49.
	66"	50"	1 1/2"	1"	<b>AWM1 S66</b>	51.
	72"	56"	1 1/2"	1"	<b>AWM1 S72</b>	53.
	78"	62"	1 1/2"	1"	<b>AWM1 S78</b>	56.
	84"	68"	1 1/2"	1"	<b>AWM1 S84</b>	58.

### Order Code

Example: <b>AWM1 S36</b>
<b>AWM1</b> Stiffener
<b>S</b> Straight
<b>36</b> Application

### Specification Information

Stiffeners are black painted finish.

### Application Notes

Currents worksurfaces for Morrison require stiffeners when the span between structural supports (end supports, cantilevers, pedestals, or C-legs) exceeds 36". Stiffener also serves as horizontal cable manager.

Stiffener corresponds in width to straight or corner worksurface back edge.

For 90" application span, use AWM1-S84 stiffener.



Stiffener mounts 18" from front edge of worksurface and will interfere with mobile or floorstanding pedestals greater than 18" deep.

To accommodate a floorstanding pedestal greater than 18" deep at one end of worksurface, specify stiffener for 12" narrower worksurface. To accommodate two floorstanding pedestals or double-wide at one end of worksurface, specify stiffener for 24" narrower worksurface.

# Cascade edge worksurfaces

## Rectangular

Currents

description	w	d	h	pattern no.	lam.
24"D Rectangular 	24"	24"	1 1/8"	<b>ACE1R2424N</b>	\$160.
	30"	24"	1 1/8"	<b>ACE1R3024N</b>	184.
	36"	24"	1 1/8"	<b>ACE1R3624N</b>	204.
	42"	24"	1 1/8"	<b>ACE1R4224N</b>	235.
	48"	24"	1 1/8"	<b>ACE1R4824N</b>	263.
	54"	24"	1 1/8"	<b>ACE1R5424N</b>	283.
	60"	24"	1 1/8"	<b>ACE1R6024N</b>	307.
	66"	24"	1 1/8"	<b>ACE1R6624N</b>	332.
	72"	24"	1 1/8"	<b>ACE1R7224N</b>	346.
	78"	24"	1 1/8"	<b>ACE1R7824N</b>	371.
	84"	24"	1 1/8"	<b>ACE1R8424N</b>	393.
	90"	24"	1 1/8"	<b>ACE1R9024N</b>	443.
96"	24"	1 1/8"	<b>ACE1R9624N</b>	484.	
30"D Rectangular 	24"	30"	1 1/8"	<b>ACE1R2430N</b>	205.
	30"	30"	1 1/8"	<b>ACE1R3030N</b>	229.
	36"	30"	1 1/8"	<b>ACE1R3630N</b>	254.
	42"	30"	1 1/8"	<b>ACE1R4230N</b>	276.
	48"	30"	1 1/8"	<b>ACE1R4830N</b>	307.
	54"	30"	1 1/8"	<b>ACE1R5430N</b>	347.
	60"	30"	1 1/8"	<b>ACE1R6030N</b>	382.
	66"	30"	1 1/8"	<b>ACE1R6630N</b>	426.
	72"	30"	1 1/8"	<b>ACE1R7230N</b>	443.
	78"	30"	1 1/8"	<b>ACE1R7830N</b>	473.
	84"	30"	1 1/8"	<b>ACE1R8430N</b>	502.
	90"	30"	1 1/8"	<b>ACE1R9030N</b>	540.
96"	30"	1 1/8"	<b>ACE1R9630N</b>	578.	

### Order Code

Example:	<b>ACE1 R4824N 118</b>
<b>ACE1</b>	Cascade edge worksurface
<b>R</b>	Rectangular
<b>48</b>	Width
<b>24</b>	Depth
<b>118</b>	Top finish

### Specification Information

*Specify:*  
Grommet / No grommet.  
Replace the "N" suffix from the pattern number with "G". Add \$20.

*Finish:*  
114 Folkstone Grey  
117 Soft Grey  
118 Bright White  
119 Pumice

### Application Notes

Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.

Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.

Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".

Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.

Worksurfaces may be supported at each end by pedestals or end support "EC" brackets and cantilever brackets matching the worksurface depth. 24"D rectangular worksurfaces may also be cantilevered from the Currents service wall.


Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.



# Cascade edge worksurfaces

## Curvilinear corner

Currents

description	A	B	C	h	pattern no.	lam.
	36"	24"	24"	1 1/8"	<b>ACE1L3636SSN</b>	\$401.
	42"	24"	24"	1 1/8"	<b>ACE1L4242SSN</b>	484.
	42"	24"	30"	1 1/8"	<b>ACE1L4242SDN</b>	575.
	42"	30"	24"	1 1/8"	<b>ACE1L4242DSN</b>	575.
	48"	24"	24"	1 1/8"	<b>ACE1L4848SSN</b>	544.
	48"	24"	30"	1 1/8"	<b>ACE1L4848SDN</b>	651.
	48"	30"	24"	1 1/8"	<b>ACE1L4848DSN</b>	651.
	48"	30"	30"	1 1/8"	<b>ACE1L4848DDN</b>	585.

### Order Code

Example:	<b>ACE1 L4848SSG 114</b>
<b>ACE1</b>	Cascade edge worksurface
<b>L</b>	Curvilinear "L" top
<b>48</b>	Width left
<b>48</b>	Width right
<b>S</b>	24" depth left side
<b>S</b>	24" depth right side
<b>G</b>	Grommets
<b>114</b>	Top finish

### Specification Information

*Specify:*  
Grommet / No grommet.  
Replace the "N" suffix from the pattern number with "G". Add \$40.

*Finish:*  
114 Folkstone Grey  
117 Soft Grey  
118 Bright White  
119 Pumice

### Application Notes

Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.

Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackes.

Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable sceen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".

Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.


Worksurfaces may be supported by left or right hand 18" cantilever bracket at the rear corner, and cantilever bridging brackets on each side edge. Worksurfaces may also be end supported or cantilever-bracket supported from Currents wall. Extended side of blended L may also be supported with Currents C-legs.

Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.

# Cascade edge worksurfaces

## Blended "D"

Currents

description	A	B	C	h	pattern no.	lam.
 <p>right hand shown</p>	66"	48"	24"	1 1/8"	<b>ACE1BD6648S(L/R)</b>	\$649.
	66"	48"	30"	1 1/8"	<b>ACE1BD6648D(L/R)</b>	683.
	72"	48"	24"	1 1/8"	<b>ACE1BD7248S(L/R)</b>	663.
	72"	48"	30"	1 1/8"	<b>ACE1BD7248D(L/R)</b>	708.
	78"	48"	24"	1 1/8"	<b>ACE1BD7848S(L/R)</b>	766.
	78"	48"	30"	1 1/8"	<b>ACE1BD7848D(L/R)</b>	791.
	84"	48"	24"	1 1/8"	<b>ACE1BD8448S(L/R)</b>	787.
	84"	48"	30"	1 1/8"	<b>ACE1BD8448D(L/R)</b>	837.

### Order Code

Example:	<b>ACE1BD6648SL 118</b>
<b>ACE1</b>	Cascade edge worksurface
<b>BD</b>	Blended "D"
<b>66</b>	Width
<b>48</b>	Depth
<b>S</b>	24"d return
<b>L</b>	Extended left
<b>118</b>	Top finish

### Specification Information

Finish:	
114	Folkstone Grey
117	Soft Grey
118	Bright White
119	Pumice

### Application Notes

Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.

Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.

Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".


Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.

Blended D- worksurfaces are supported by a 48" VDT support bracket kit for cantilevered from the Currents wall in conjunction with Currents C-leg. Use flat bracket or bridging bracket to join to adjacent worksurface.

# Cascade edge worksurfaces

## Blended "L"

Currents

description	B	C	A	D	h	pattern no.	lam.
	42"	60"	24"	24"	1 1/8"	<b>ACE1L4260SSN</b>	\$664.
	42"	66"	24"	24"	1 1/8"	<b>ACE1L4266SSN</b>	683.
	42"	72"	24"	24"	1 1/8"	<b>ACE1L4272SSN</b>	709.
	42"	78"	24"	24"	1 1/8"	<b>ACE1L4278SSN</b>	716.
	48"	60"	24"	24"	1 1/8"	<b>ACE1L4860SSN</b>	673.
	48"	60"	24"	30"	1 1/8"	<b>ACE1L4860SDN</b>	661.
	48"	60"	30"	24"	1 1/8"	<b>ACE1L4860DSN</b>	661.
	48"	66"	24"	24"	1 1/8"	<b>ACE1L4866SSN</b>	697.
	48"	66"	24"	30"	1 1/8"	<b>ACE1L4866SDN</b>	694.
	48"	66"	30"	24"	1 1/8"	<b>ACE1L4866DSN</b>	694.
	48"	72"	24"	24"	1 1/8"	<b>ACE1L4872SSN</b>	722.
	48"	72"	24"	30"	1 1/8"	<b>ACE1L4872SDN</b>	727.
	48"	72"	30"	24"	1 1/8"	<b>ACE1L4872DSN</b>	727.
	48"	78"	24"	24"	1 1/8"	<b>ACE1L4878SSN</b>	797.
	48"	84"	24"	24"	1 1/8"	<b>ACE1L4884SSN</b>	896.
	60"	42"	24"	24"	1 1/8"	<b>ACE1L6042SSN</b>	664.
	60"	48"	24"	24"	1 1/8"	<b>ACE1L6048SSN</b>	673.
	60"	48"	24"	30"	1 1/8"	<b>ACE1L6048SDN</b>	661.
	60"	48"	30"	24"	1 1/8"	<b>ACE1L6048DSN</b>	661.
	66"	42"	24"	24"	1 1/8"	<b>ACE1L6642SSN</b>	683.
	66"	48"	24"	24"	1 1/8"	<b>ACE1L6648SSN</b>	697.
	66"	48"	24"	30"	1 1/8"	<b>ACE1L6648SDN</b>	694.
	66"	48"	30"	24"	1 1/8"	<b>ACE1L6648DSN</b>	694.
	72"	42"	24"	24"	1 1/8"	<b>ACE1L7242SSN</b>	709.
	72"	48"	24"	24"	1 1/8"	<b>ACE1L7248SSN</b>	722.
	72"	48"	24"	30"	1 1/8"	<b>ACE1L7248SDN</b>	727.
	72"	48"	30"	24"	1 1/8"	<b>ACE1L7248DSN</b>	727.

Order Code	Specification Information	Application Notes
<p>Example: <b>ACE1 L4260SSN 114</b></p> <p><b>ACE1</b> Cascade edge worksurface</p> <p><b>L</b> Blended "L" top</p> <p><b>42</b> Width</p> <p><b>60</b> Depth</p> <p><b>S</b> 24"d, left side</p> <p><b>S</b> 24"d, right side</p> <p><b>N</b> No Grommet</p> <p><b>114</b> Top finish</p>	<p><i>Specify:</i></p> <p>Grommet / No grommet. Replace the "N" suffix from the pattern number with "G". Add \$40.</p> <p><i>Finish:</i></p> <p>114 Folkstone Grey 117 Soft Grey 118 Bright White 119 Pumice</p>	<p>Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.</p> <p>Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.</p> <p>Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.</p>

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 1/8".

Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.


Worksurfaces may be supported by left or right hand 18" cantilever bracket at the rear corner, and cantilever bridging brackets on each side edge. Worksurfaces may also be end supported or cantilever-bracket supported from Currents wall. Extended side of blended L may also be supported with Currents C-legs.

Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.

# Cascade edge worksurfaces

## Blended "L"

description	B	C	A	D	h	pattern no.	lam.
Blended "L"	78"	42"	24"	24"	1 1/8"	<b>ACE1L7842SSN</b>	\$716.
	78"	48"	24"	24"	1 1/8"	<b>ACE1L7848SSN</b>	797.
	84"	48"	24"	24"	1 1/8"	<b>ACE1L8448SSN</b>	896.



### Order Code

Example:	<b>ACE1 L4260SSN 114</b>
<b>ACE1</b>	Cascade edge worksurface
<b>L</b>	Blended "L" top
<b>42</b>	Width
<b>60</b>	Depth
<b>S</b>	24"d, left side
<b>S</b>	24"d, right side
<b>N</b>	No Grommet
<b>114</b>	Top finish

### Specification Information

*Specify:*  
 Grommet / No grommet.  
 Replace the "N" suffix from the pattern number with "G". Add \$40.

*Finish:*  
 114 Folkstone Grey  
 117 Soft Grey  
 118 Bright White  
 119 Pumice

### Application Notes

Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.

Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackes.

Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable sceen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".

Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.






Worksurfaces may be supported by left or right hand 18" cantilever bracket at the rear corner, and cantilever bridging brackets on each side edge. Worksurfaces may also be end supported or cantilever-bracket supported from Currents wall. Extended side of blended L may also be supported with Currents C-legs.

Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.

# Cascade edge worksurfaces

## Half round and corner round

Currents

description	w	d	h	pattern no.	lam.
 Half Round	48"	18"	1 1/8"	<b>ACE1H4818</b>	\$346.
	49 1/2"	18"	1 1/8"	<b>ACE1H4818P</b>	346.
	60"	24"	1 1/8"	<b>ACE1H6024</b>	477.
	61 1/2"	24"	1 1/8"	<b>ACE1H6024P</b>	477.
 LH Corner Round	24"	24"	1 1/8"	<b>AWF1CR24L</b>	184.
 RH Corner Round	24"	24"	1 1/8"	<b>AWF1CR24R</b>	184.
 Notched Corner Round	24"	24"	1 1/8"	<b>AWF1CR24N</b>	184.
 Sample	12"	12"	1 1/8"	<b>ACE1R1212G</b>	100.

### Order Code

Example:	<b>ACE1 H4818P 117</b>
<b>ACE1</b>	Cascade edge worksurface
<b>H</b>	Half round
<b>48</b>	Width
<b>18</b>	Depth
<b>P</b>	Notched for panel
<b>117</b>	Top finish

### Specification Information

Finish:	
114	Folkstone Grey
117	Soft Grey
118	Bright White
119	Pumice

### Application Information

Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.

Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackes.

Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable sceen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall. Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".

Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.

#### Half round

Half round worksurfaces may be supported by cantilever bridging brackets in conjunction with a rounded end support column.



#### Corner round

Notched corner round worksurfaces are supported by cantilever bridging brackets on both side edges. End run Left- and Right-hand corner round worksurfaces are supported by a combination of an "EC" end bracket along the panel edge and a cantilever bridging bracket to the adjacent worksurface side edge.

# Cascade edge worksurfaces

## Wave end

Currents

description	1	2	3	A	B	h	pattern no.	lam.
Wave End, LH 	36"	24"	30"	15"	3"	1 1/8"	<b>ACE1W363024N</b>	\$432.
	42"	24"	30"	15"	9"	1 1/8"	<b>ACE1W423024N</b>	453.
	48"	24"	30"	15"	15"	1 1/8"	<b>ACE1W483024N</b>	485.
	72"	24"	30"	23 1/2"	30 1/2"	1 1/8"	<b>ACE1W723024N</b>	617.
Wave End, RH 	36"	30"	24"	3"	15"	1 1/8"	<b>ACE1W362430N</b>	432.
	42"	30"	24"	9"	15"	1 1/8"	<b>ACE1W422430N</b>	453.
	48"	30"	24"	15"	15"	1 1/8"	<b>ACE1W482430N</b>	485.
	72"	30"	24"	23 1/2"	30 1/2"	1 1/8"	<b>ACE1W722430N</b>	617.

### Order Code

Example:	<b>ACE1W483024N 118</b>
<b>ACE1</b>	Cascade edge worksurface
<b>W</b>	Wave end
<b>48</b>	Width
<b>30</b>	Depth, right side
<b>24</b>	Depth, left side
<b>N</b>	No grommet
<b>118</b>	Top finish

### Specification Information

*Specify:*  
 Grommet / No grommet.  
 Replace the "N" suffix from the pattern number with "G". Add \$20.

*Finish:*  
 114 Folkstone Grey  
 117 Soft Grey  
 118 Bright White  
 119 Pumice

### Application Notes

Cascade Edge worksurfaces are wrapped with a vinyl sheet heated and pressed around an MDF substrate. They are more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface during installation. Treat Cascade Edge worksurfaces like veneer worksurfaces and they will perform well under normal conditions. Cascade Edge worksurfaces have a 5 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation.

Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets.

Cascade Edge worksurfaces are sized for panel-based applications and may be supported by linkable screen in conjunction with Morrison panel planning brackets, or end support from the Currents wall. 24" D straight tops may also be cantilevered from the Currents service wall.

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.

Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance.

Edge grommets are centered at rear edge of worksurface for maximum clearance of 1 3/8".

Worksurfaces require support every 48" in width. All supporting hardware is ordered separately. Use Morrison brackets with wood screws for Currents Linkable screen applications.

Worksurfaces may be supported at each end by pedestals or end support "EC" brackets and cantilever brackets matching the worksurface depth. Use cantilever bridging bracket to join to adjacent worksurface.


Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.

# Worksurface supports

## *wall-mounted*


Currents

description	type	w	d	h	pattern no.	paint
Adjustable cantilever bracket (up to 24"D)		3"	20"	23-33"	<b>AB1 AC24 ( )</b>	\$160.



Adjustable cantilever bridging bracket		3"	20"	23-33"	<b>AB1-ABC24( )</b>	207.
--	--	----	-----	--------	---------------------	------





End support bracket	Adjustable	3"	6"	23-33"	<b>AB2 AE ( )</b>	126.
	Fixed	3"	6"	27"	<b>AB1 FE ( )</b>	90.



Order Code	Specification Information	Application Notes
Example: <b>AB1 AC24 117</b>	<i>Specify painted finishes for support column, C-leg, and brackets.</i>	Specify worksurface cantilever and end support brackets to attach worksurfaces to Currents service walls.  Specify two cantilever brackets to support any 24"D Currents, Morrison, Reff, or Equity worksurface, or one back edge of corner worksurface. Specify two end support brackets to support one end of straight, conference, or arc-shape surface.  Adjustable height cantilever and bridging cantilever brackets support underside of worksurface in 1" increments from 23" to 33"H (24" to 34" top height).
<b>AB1</b> Bracket		
<b>AC</b> Type		
<b>24</b> Depth		
<b>117</b> Finish		Adjustable bridging cantilever supports adjacent 48"W straight or corner worksurfaces.  End support brackets adjust 23"-33"H (24" to 34" top height). Fixed height brackets support worksurface at 28"H.

# Worksurface supports *freestanding*

Currents

description	type	application	w	d	h	pattern no.	paint
 Straight leg	Adjustable		2"	4"	23-29"	<b>AB1 I27A(G/C) ( )</b>	\$312.
	Fixed		2"	4"	27"	<b>AB1 I27F(G/C) ( )</b>	160.
	Low		2"	4"	25"	<b>AB1 I25(G/C) ( )</b>	160.
 C-leg, adjustable	24"D	Left	2"	21"	23-29"	<b>AB1 CL24L ( )( )</b>	344.
		Right	2"	21"	23-29"	<b>AB1 CL24R ( )( )</b>	344.
	30"D	Left	2"	27"	23-29"	<b>AB1 CL30L ( )( )</b>	379.
		Right	2"	27"	23-29"	<b>AB1 CL30R ( )( )</b>	379.
 C-leg, fixed height	24"D	Left	2"	21"	27"	<b>AB1 CLF24L ( )( )</b>	288.
		Right	2"	21"	27"	<b>AB1 CLF24R ( )( )</b>	288.
	30"D	Left	2"	27"	27"	<b>AB1 CLF30L ( )( )</b>	315.
		Right	2"	27"	27"	<b>AB1 CLF30R ( )( )</b>	315.
 Corner leg	Corner worksurfaces		4"	4"	23-29"	<b>AB1 VL ( )( )</b>	288.

## Order Code

Example:	<b>AB1 CL24L 612 G</b>
<b>AB1</b>	Support
<b>CL</b>	C-leg
<b>24</b>	Depth
<b>L</b>	Left
<b>612</b>	Finish
<b>G</b>	Glides

## Specification Information

*Specify painted finishes for support column, C-leg, and brackets. C-Leg casters/glides:*

C Rear casters/front glides  
 G All glides  
 Casters/glides combination has no levelling. All-glides version provides 1 3/4" levelling range.

## Application Notes

Specify two straight legs under shared worksurface. Straight legs are fixed at 27"H (28" top height) or adjustable 23"-29" (24"-30" top height).






C-legs support one end of any corresponding depth Currents worksurface. Corner legs support only the back corner of a Currents corner worksurface. Specify C-legs for side edges of Currents corner and extended corner worksurfaces.

Adjustable C-legs and corner legs are adjustable in height to support underside of worksurface at 1" increments from 23" to 29" (24" to 30" Currents top height). Fixed height C-legs support desk at 28"H. Fixed height C-legs do not accept service beams.




# Add-up panels


*translucent or perforated surface  
service wall crown applications*


description	w	d	h	pattern no.	list price
 12"H add-up panels, translucent fiberglass	24"	2"	12"	<b>AU 1224 TC</b>	\$378.
	36"	2"	12"	<b>AU 1236 TC</b>	433.
	48"	2"	12"	<b>AU 1248 TC</b>	486.
	60"	2"	12"	<b>AU 1260 TC</b>	567.
	72"	2"	12"	<b>AU 1272 TC</b>	648.
 21"H add-up panels, translucent fiberglass	24"	2"	21"	<b>AU 2124 TC</b>	567.
	36"	2"	21"	<b>AU 2136 TC</b>	648.
	48"	2"	21"	<b>AU 2148 TC</b>	729.
	60"	2"	21"	<b>AU 2160 TC</b>	851.
	72"	2"	21"	<b>AU 2172 TC</b>	972.
 28"H add-up panels, translucent fiberglass	24"	2"	28"	<b>AU 2824 TC</b>	567.
	36"	2"	28"	<b>AU 2836 TC</b>	648.
	48"	2"	28"	<b>AU 2848 TC</b>	729.
	60"	2"	28"	<b>AU 2860 TC</b>	851.
	72"	2"	28"	<b>AU 2872 TC</b>	972.
 12"H add-up panels, perforated	24"	2"	12"	<b>AU 1224 H</b>	578.
	36"	2"	12"	<b>AU 1236 H</b>	661.
	48"	2"	12"	<b>AU 1248 H</b>	745.
	60"	2"	12"	<b>AU 1260 H</b>	867.
	72"	2"	12"	<b>AU 1272 H</b>	992.
 21"H add-up panels, perforated	24"	2"	21"	<b>AU 2124 H</b>	867.
	36"	2"	21"	<b>AU 2136 H</b>	992.
	48"	2"	21"	<b>AU 2148 H</b>	1,115.
	60"	2"	21"	<b>AU 2160 H</b>	1,302.
	72"	2"	21"	<b>AU 2172 H</b>	1,487.

Order Code	Specification Information	Application Notes																														
Example: <b>AU 2848 TC</b>	<i>Surface type:</i>	Add-up panels add privacy and light control above any height Currents service wall. Bottom edge, with wedge-shape plugs, inserts in center of crown at any point, regardless of upmounted storage. Add-up panels include continuous edge trim.																														
<b>AU</b> Add up panel	TC Translucent fiberglass																															
<b>28</b> Height	H Perforated	<i>Overall height of service wall with Add-up panels:</i> <table border="1"> <thead> <tr> <th>Nominal wall height</th> <th>Add-up height</th> <th>Overall height</th> </tr> </thead> <tbody> <tr><td>39"</td><td>12"</td><td>55"</td></tr> <tr><td>39"</td><td>21"</td><td>64"</td></tr> <tr><td>39"</td><td>28"</td><td>71"</td></tr> <tr><td>48"</td><td>12"</td><td>64"</td></tr> <tr><td>48"</td><td>21"</td><td>73"</td></tr> <tr><td>48"</td><td>28"</td><td>80"</td></tr> <tr><td>64"</td><td>12"</td><td>80"</td></tr> <tr><td>64"</td><td>21"</td><td>89"</td></tr> <tr><td>64"</td><td>28"</td><td>96"</td></tr> </tbody> </table>	Nominal wall height	Add-up height	Overall height	39"	12"	55"	39"	21"	64"	39"	28"	71"	48"	12"	64"	48"	21"	73"	48"	28"	80"	64"	12"	80"	64"	21"	89"	64"	28"	96"
Nominal wall height	Add-up height		Overall height																													
39"	12"		55"																													
39"	21"		64"																													
39"	28"		71"																													
48"	12"		64"																													
48"	21"		73"																													
48"	28"		80"																													
64"	12"		80"																													
64"	21"		89"																													
64"	28"	96"																														
<b>48</b> Width	Perforated panel finish is light grey.																															
<b>T</b> Surface type	Edge trim for add-up panels is integral color trim grey.																															
<b>C</b> Finish																																

Add-up panels  
*upholstered surface*  
*service wall crown applications*

description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
 12"H add-up panels	24"	2"	12"	<b>AU 1224 A ( )</b>	\$309.	\$321.	\$333.	\$356.	\$368.	\$379.	\$390.	\$413.	\$436.
	36"	2"	12"	<b>AU 1236 A ( )</b>	356.	368.	379.	402.	413.	424.	436.	459.	483.
	48"	2"	12"	<b>AU 1248 A ( )</b>	402.	413.	424.	448.	459.	470.	483.	505.	528.
	60"	2"	12"	<b>AU 1260 A ( )</b>	470.	483.	493.	517.	528.	540.	550.	573.	597.

 21"H add-up panels	24"	2"	21"	<b>AU 2124 A ( )</b>	384.	402.	418.	453.	470.	488.	505.	540.	573.
	36"	2"	21"	<b>AU 2136 A ( )</b>	442.	459.	476.	511.	528.	545.	563.	597.	631.
	48"	2"	21"	<b>AU 2148 A ( )</b>	498.	517.	534.	568.	586.	602.	620.	654.	688.
	60"	2"	21"	<b>AU 2160 A ( )</b>	586.	602.	620.	654.	672.	688.	705.	739.	775.

 28"H add-up panels	24"	2"	28"	<b>AU 2824 A ( )</b>	459.	483.	505.	550.	573.	597.	620.	666.	711.
	36"	2"	28"	<b>AU 2836 A ( )</b>	528.	550.	573.	620.	643.	666.	688.	734.	780.
	48"	2"	28"	<b>AU 2848 A ( )</b>	597.	620.	643.	688.	711.	734.	757.	804.	849.
	60"	2"	28"	<b>AU 2860 A ( )</b>	700.	723.	747.	791.	814.	838.	861.	907.	953.

**Order Code**

Example:	<b>AU 2848 A20</b>
<b>AU</b>	Add up panel
<b>28</b>	Height
<b>48</b>	Width
<b>A</b>	Surface type
<b>20</b>	Fabric group

**Specification Information**

*Surface types:*  
 A Tackable upholstered

*Specify fabric group for upholstered add-up panels:*

10	Fabric group 10
15	Fabric group 15
20	Fabric group 20
30	Fabric group 30
35	Fabric group 35
40	Fabric group 40
45	Fabric group 45
50	Fabric group 50
55	Fabric group 55

Edge trim is integral color trim grey finish.

**Application Notes**

Add-up panels add visual and acoustical privacy above any height Currents service wall. Bottom edge, with wedge-shape plugs, inserts in center of crown at any point, regardless of upmounted storage. Add-up panels include continuous edge trim.

Upholstered add-up panels have been tested to NRC .60 and STC 21.

When ordering 60" wide panels, please check width of fabric selected.

*Overall height of service wall with Add-up panels:*

Nominal wall height	Add-up height	Overall height
39"	12"	55"
39"	21"	64"
39"	28"	71"
48"	12"	64"
48"	21"	73"
48"	28"	80"
64"	12"	80"
64"	21"	89"
64"	28"	96"

# Add-up panel connectors and fillers

## *field retrofit kits*

Currents

description	type	pattern no.	list price
Field Retrofit Trim Kit for non-stackable add-up panels	12 x 24	<b>AUA1224</b>	n/c
	12 x 36	<b>AUA1236</b>	n/c
	12 x 48	<b>AUA1248</b>	n/c
	12 x 60	<b>AUA1260</b>	n/c
	12 x 72	<b>AUA1272</b>	n/c
	21 x 24	<b>AUA2124</b>	n/c
	21 x 36	<b>AUA2136</b>	n/c
	21 x 48	<b>AUA2148</b>	n/c
	21 x 60	<b>AUA2160</b>	n/c
	21 x 72	<b>AUA2172</b>	n/c
	28 x 24	<b>AUA2824</b>	n/c
	28 x 36	<b>AUA2836</b>	n/c
	28 x 48	<b>AUA2848</b>	n/c
	28 x 60	<b>AUA2860</b>	n/c
	28 x 72	<b>AUA2872</b>	n/c

### Order Code

Example: **AUA1224**

**AU** Add-up

**A** Type

**12** Height

**24** Width

### Specification Information

Finish is trim grey.






Fillers require retrofitting add-up panels with new trim.

Retrofit trim kits are no-charge (n/c) items specified separately.

# Add-up panel connectors and fillers

## *service wall applications*

Currents

description	w	d	h	pattern no.	list price
Straight alignment clip 	3"	2"	–	<b>AU1 CS</b>	\$10.
L connector add-up fillers 	6"	6"	16"	<b>AU1 CL12</b>	279.
	6"	6"	25"	<b>AU1 CL21</b>	334.
	6"	6"	32"	<b>AU1 CL28</b>	390.
T connector add-up fillers 	6"	6"	16"	<b>AU1 CT12</b>	279.
	6"	6"	25"	<b>AU1 CT21</b>	334.
	6"	6"	32"	<b>AU1 CT28</b>	390.
T-end 1 1/8" extension fillers 	2"	1 1/8"	16"	<b>AU1 X112</b>	167.
	2"	1 1/8"	25"	<b>AU1 X121</b>	194.
	2"	1 1/8"	32"	<b>AU1 X128</b>	223.
T-end 3 1/2" extension fillers 	2"	3 1/2"	16"	<b>AU1 X312</b>	223.
	2"	3 1/2"	25"	<b>AU1 X321</b>	251.
	2"	3 1/2"	32"	<b>AU1 X328</b>	279.

### Order Code

Example:	<b>AU1 CL12</b>
<b>AU1</b>	Add-up
<b>CL</b>	Connector type
<b>12</b>	Application

### Specification Information

Add-up fillers and alignment clip are painted trim grey finish.

Pattern numbers correspond to add-up panel height.

### Application Notes



Straight connector clips over adjacent non-stackable add-up panels.

Add-up fillers join between add-up panels over a service wall connection or a T-end to extend enclosure from bottom of crown to top of add-up. Fillers require retrofitting add-up panels with new trim.

Retrofit kits are no-charge items that are specified separately.

Stackable add-up panels  
glazed, translucent fiberglass, perforated, and marker surface  
first up panels

Currents

description	w	d	h	pattern no.	acrylic W (C,S)	acrylic W (T)	fiberglass (TC)	perforated (H)	marker (M)
First up panel on service wall crown 	24"	2"	12"	<b>AY1 1224C( )</b>	\$472.	\$514.	\$551.	\$723.	\$493.
	36"	2"	12"	<b>AY1 1236C( )</b>	549.	599.	649.	889.	573.
	48"	2"	12"	<b>AY1 1248C( )</b>	626.	685.	766.	1,073.	680.
	60"	2"	12"	<b>AY1 1260C( )</b>	669.	735.	877.	1,274.	n/a
	24"	2"	21"	<b>AY1 2124C( )</b>	513.	558.	589.	804.	555.
	36"	2"	21"	<b>AY1 2136C( )</b>	598.	655.	705.	999.	648.
	48"	2"	21"	<b>AY1 2148C( )</b>	683.	751.	833.	1,220.	774.
	60"	2"	21"	<b>AY1 2160C( )</b>	780.	858.	956.	1,453.	n/a
	24"	2"	28"	<b>AY1 2824C( )</b>	712.	783.	699.	963.	594.
	36"	2"	28"	<b>AY1 2836C( )</b>	843.	929.	833.	1,208.	697.
	48"	2"	28"	<b>AY1 2848C( )</b>	976.	1,077.	999.	1,483.	832.
	60"	2"	28"	<b>AY1 2860C( )</b>	1,059.	1,164.	1,152.	1,772.	n/a
	First up panel on linkable screen or Morrison panel 	18"	2"	16"	<b>AY1 1618M( )</b>	445.	484.	n/a	n/a
24"		2"	16"	<b>AY1 1624M( )</b>	484.	525.	735.	1,036.	517.
30"		2"	16"	<b>AY1 1630M( )</b>	523.	571.	n/a	n/a	556.
36"		2"	16"	<b>AY1 1636M( )</b>	564.	617.	889.	1,318.	602.
42"		2"	16"	<b>AY1 1642M( )</b>	601.	658.	n/a	n/a	652.
48"		2"	16"	<b>AY1 1648M( )</b>	642.	703.	1,066.	1,648.	716.
60"		2"	16"	<b>AY1 1660M( )</b>	697.	760.	1,232.	1,948.	n/a
18"		2"	25"	<b>AY1 2518M( )</b>	566.	619.	n/a	n/a	n/a
24"		2"	25"	<b>AY1 2524M( )</b>	619.	677.	766.	1,098.	576.
30"		2"	25"	<b>AY1 2530M( )</b>	673.	738.	n/a	n/a	625.
36"		2"	25"	<b>AY1 2536M( )</b>	728.	801.	926.	1,404.	675.
42"		2"	25"	<b>AY1 2542M( )</b>	782.	860.	n/a	n/a	740.
48"		2"	25"	<b>AY1 2548M( )</b>	838.	922.	1,115.	1,759.	806.
60"		2"	25"	<b>AY1 2560M( )</b>	891.	980.	1,294.	2,083.	n/a

**Order Code**

Example:	<b>AY1 1636M WC 117</b>
<b>AY1</b>	Stackable add-up
<b>16</b>	Height
<b>36</b>	Width
<b>M</b>	Mounting kit
<b>W</b>	Surface type
<b>C</b>	Acrylic finish
<b>117</b>	Frame finish

**Specification Information**

Top and edge trim are trim grey.

*Specify surface type.*

W	Glazed
TC	Translucent fiberglass
H	perforated (light metallic grey only)
M	Marker surface (both sides)

*For glazed panels specify acrylic:*

C	Clear tempered glass
S	Smoked acrylic
T	Translucent acrylic

*For glazed panels also specify frame finish:*


**Application Notes**

Stackable add-up panels provide adaptable privacy on service walls, linkable screens or Morrison panels. First up panels include top and edge trims and bayonet supports that bolt on to Currents service wall frame or top of screen or panel. All stackable add-up panels may be removed without tools.

Specify trim caps and connectors separately.

Stackable add-up panels  
*glazed, translucent fiberglass, perforated, and marker surface*  
*next up panels*

description	w	d	h	pattern no.	acrylic W (C,S)	acrylic W (T)	fiberglass (TC)	perforated (H)	marker (M)
Next up panel on stackable add-up panels	18"	2"	16"	<b>AY1 1618S ( )</b>	\$445.	\$484.	n/a	n/a	n/a
	24"	2"	16"	<b>AY1 1624S ( )</b>	484.	525.	735.	1,036.	517.
	30"	2"	16"	<b>AY1 1630S ( )</b>	523.	571.	n/a	n/a	556.
	36"	2"	16"	<b>AY1 1636S ( )</b>	564.	617.	889.	1,318.	602.
	42"	2"	16"	<b>AY1 1642S ( )</b>	601.	658.	n/a	n/a	652.
	48"	2"	16"	<b>AY1 1648S ( )</b>	642.	703.	1,066.	1,648.	716.
	60"	2"	16"	<b>AY1 1660S ( )</b>	697.	760.	1,232.	1,948.	n/a



**Order Code**

Example:	<b>AY1 1636S WC 117</b>
<b>AY1</b>	Stackable add-up
<b>16</b>	Height
<b>36</b>	Width
<b>S</b>	Mounting kit
<b>W</b>	Surface type
<b>C</b>	Acrylic finish
<b>117</b>	Frame finish

**Specification Information**


Top and edge trim are trim grey.		<i>For glazed panels specify acrylic:</i>
<i>Specify surface type.</i>		C Clear tempered glass
W	Glazed	S Smoked acrylic
TC	Translucent fiberglass	T Translucent acrylic
H	perforated (light grey only)	<i>For glazed panels also specify frame finish.</i>
M	Marker surface (both sides)	


**Application Notes**

Stackable add-up panels provide adaptable privacy on service walls, linkable screens or Morrison panels. Next up panels include intermediate masts that engage into sides of corresponding width first up or next-up panels. All stackable add-up panels may be removed without tools.

Specify trim caps and connectors separately.

Stackable add-up panels  
upholstered  
first up panels

description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
 First up panel on service wall crown	24"	2 1/4"	12"	<b>AY1 1224C A()</b>	\$369.	\$399.	\$407.	\$447.	\$467.	\$497.	\$525.	\$546.	\$573.
	36"	2 1/4"	12"	<b>AY1 1236C A()</b>	430.	468.	478.	528.	553.	592.	628.	654.	688.
	48"	2 1/4"	12"	<b>AY1 1248C A()</b>	499.	549.	563.	624.	653.	700.	747.	778.	820.
	60"	2 1/4"	12"	<b>AY1 1260C A()</b>	561.	616.	630.	702.	736.	790.	844.	881.	930.
	24"	2 1/4"	21"	<b>AY1 2124C A()</b>	404.	439.	448.	493.	517.	550.	586.	606.	640.
	36"	2 1/4"	21"	<b>AY1 2136C A()</b>	474.	518.	529.	588.	616.	658.	702.	730.	770.
	48"	2 1/4"	21"	<b>AY1 2148C A()</b>	555.	610.	625.	698.	730.	784.	836.	872.	921.
	60"	2 1/4"	21"	<b>AY1 2160C A()</b>	623.	685.	703.	786.	826.	888.	948.	990.	1,046.

 First up panel on linkable screen	18"	2 1/4"	16"	<b>AY1 1618M A()</b>	361.	393.	400.	441.	459.	489.	518.	538.	565.
	24"	2 1/4"	16"	<b>AY1 1624M A()</b>	381.	413.	418.	463.	485.	517.	547.	568.	597.
	30"	2 1/4"	16"	<b>AY1 1630M A()</b>	413.	451.	460.	509.	531.	568.	601.	625.	658.
	36"	2 1/4"	16"	<b>AY1 1636M A()</b>	444.	486.	495.	549.	576.	617.	655.	681.	719.
	42"	2 1/4"	16"	<b>AY1 1642M A()</b>	488.	535.	547.	609.	638.	682.	729.	758.	802.
	48"	2 1/4"	16"	<b>AY1 1648M A()</b>	520.	571.	586.	649.	680.	731.	779.	811.	857.
	60"	2 1/4"	16"	<b>AY1 1660M A()</b>	583.	641.	657.	732.	769.	827.	883.	920.	972.
	18"	2 1/4"	25"	<b>AY1 2518M A()</b>	396.	431.	440.	486.	508.	542.	573.	596.	627.
	24"	2 1/4"	25"	<b>AY1 2524M A()</b>	417.	456.	465.	513.	537.	572.	607.	631.	666.
	30"	2 1/4"	25"	<b>AY1 2530M A()</b>	456.	497.	509.	563.	590.	630.	671.	699.	736.
	36"	2 1/4"	25"	<b>AY1 2536M A()</b>	490.	538.	549.	610.	640.	685.	731.	760.	804.
	42"	2 1/4"	25"	<b>AY1 2542M A()</b>	541.	594.	607.	678.	710.	765.	815.	850.	898.
	48"	2 1/4"	25"	<b>AY1 2548M A()</b>	577.	634.	651.	727.	760.	817.	872.	911.	963.
	60"	2 1/4"	25"	<b>AY1 2560M A()</b>	648.	713.	733.	820.	861.	927.	991.	1,033.	1,092.

Order Code	Specification Information	Application Notes
Example: <b>AY1 1660M A20</b>	Top and trim edge are trim grey.	Stackable add-up panels provide adaptable privacy on service walls, linkable screens or Morrison panels. First up panels include top and edge trims and bayonet supports that bolt on to Currents service wall frame or top of screen or panel. All stackable add-up panels may be removed without tools.
<b>AY1</b> Stackable panel	<i>Surface type:</i>	
<b>16</b> Height	A Upholstered	
<b>60</b> Width	<i>Specify fabric group:</i>	
<b>M</b> Mounting kit	10 Fabric group 10	
<b>A</b> Surface type	15 Fabric group 15	
<b>20</b> Fabric group	20 Fabric group 20	
	30 Fabric group 30	
	35 Fabric group 35	
	40 Fabric group 40	
	45 Fabric group 45	
	50 Fabric group 50	
	55 Fabric group 55	

Stackable add-up panels  
*upholstered*  
*next up panels*



description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
Next up panel on stackable add-up panels	18"	2 1/4"	16"	<b>AY1 1618S A()</b>	\$361.	\$393.	\$400.	\$441.	\$459.	\$489.	\$518.	\$538.	\$565.
	24"	2 1/4"	16"	<b>AY1 1624S A()</b>	381.	413.	421.	463.	485.	517.	547.	568.	597.
	30"	2 1/4"	16"	<b>AY1 1630S A()</b>	413.	451.	460.	509.	531.	568.	601.	625.	658.
	36"	2 1/4"	16"	<b>AY1 1636S A()</b>	444.	486.	495.	549.	576.	617.	655.	681.	719.
	42"	2 1/4"	16"	<b>AY1 1642S A()</b>	488.	535.	547.	609.	638.	682.	729.	758.	802.
	48"	2 1/4"	16"	<b>AY1 1648S A()</b>	520.	571.	586.	649.	680.	731.	779.	811.	857.
	60"	2 1/4"	16"	<b>AY1 1660S A()</b>	583.	641.	657.	732.	769.	827.	883.	920.	972.



Order Code	Specification Information	Application Notes
Example: <b>AY1 1660S A20</b>	Top and trim edge are trim grey.	Stackable add-up panels provide adaptable privacy on service walls, linkable screens or Morrison panels. Next up panels include intermediate masts that engage into sides of corresponding width first up or next-up panels. All stackable add-up panels may be removed without tools.
<b>AY1</b> Stackable panel	<i>Surface type:</i>	
<b>16</b> Height	A Tackable upholstered	
<b>60</b> Width	<i>Specify fabric group:</i>	
<b>S</b> Mounting kit	10 Fabric group 10	
<b>A</b> Surface type	15 Fabric group 15	
<b>20</b> Fabric group	20 Fabric group 20	
	30 Fabric group 30	
	35 Fabric group 35	
	40 Fabric group 40	
	45 Fabric group 45	
	50 Fabric group 50	
	55 Fabric group 55	



Stackable add-up connectors and fillers  
*stackable add-up panels or  
 Morrison panels perpendicular to service wall*






description	type	w	d	h	pattern no.	list price
Crown fillers for stackable add-up panels perpendicular to service wall 	First up	2"	2"	16"	<b>AY1 PC16</b>	\$179.
	First up	2"	2"	25"	<b>AY1 PC25</b>	189.
	First up	2"	2"	32"	<b>AY1 PC32</b>	200.
	Next up	2"	2"	16"	<b>AY1 SPC16</b>	167.
Crown fillers for Morrison perpendicular to service wall 		2 1/4"	2 1/4"	16"	<b>AU1 PC12( )</b>	111.
		2 1/4"	2 1/4"	25"	<b>AU1 PC21( )</b>	139.
		2 1/4"	2 1/4"	32"	<b>AU1 PC28( )</b>	167.

Order Code	Specification Information	Application Notes
Example: <b>AU1 PC12 613</b> <b>AU1</b> Add-up panel <b>PC</b> Crown filler <b>12</b> Height <b>613</b> Finish	Specify finish for vertical cover and top cap.	Crown fillers extend from stackable add-up panel or Morrison panel or add-on panel connector to surface of crown-mounted add-up panels.  Specify connector separately.  Crown filler includes top cap.

# Stackable add-up connectors and fillers

## *crown and linkable screen applications*





Currents

description	type	w	d	h	pattern no.	price
Trim caps 	End cap				<b>AY1 CE</b>	\$5.
	Straight cap	2"	2"	–	<b>AY1 CS</b>	5.
Corner first up stackable connectors over linkable screens 		2"	2"	16"	<b>AY1 LL16</b>	167.
		2"	2"	25"	<b>AY1 LL25</b>	189.
		2"	2"	32"	<b>AY1 LL32</b>	212.
Corner next up stackable connectors over linkable screens 		2"	2"	16"	<b>AY1 SL16</b>	200.
T first up stackable connectors over linkable screens 		2"	2"	16"	<b>AY1 LT16</b>	212.
		2"	2"	25"	<b>AY1 LT25</b>	234.
		2"	2"	32"	<b>AY1 LT32</b>	256.
T next up stackable connectors over linkable screens 		2"	2"	16"	<b>AY1 ST16</b>	245.

Order Code	Specification Information	Application Notes
Example: <b>AY1 LL16</b>	Connector caps and connector trims are integral color trim grey.	Trim caps are specified by application to fill top corners of stackable add-up panels. Straight cap aligns adjacent add-up panels. End cap finishes the end of a run of add-up panels.
<b>AY1</b> Stackable add-up		
<b>L</b> Screen application		
<b>L</b> Configuration		
<b>16</b> Height		
		Stackable connectors join stackable add-up panels over a linkable screen connector. Next up connectors correspond to next up panels.

# Stackable add-up connectors and fillers

## *crown and linkable screen applications*






description	type	w	d	h	pattern no.	price
X first up stackable connectors over linkable screens 		2"	2"	16"	<b>AY1 LX16</b>	\$245.
		2"	2"	25"	<b>AY1 LX25</b>	279.
		2"	2"	32"	<b>AY1 LX32</b>	301.
<hr/>						
X next up stackable connectors over linkable screens - X next up 		2"	2"	16"	<b>AY1 SX16</b>	279.
<hr/>						
First up straight post 		2"	2"	16"	<b>AY1 LP16</b>	189.
		2"	2"	25"	<b>AY1 LP25</b>	212.
		2"	2"	32"	<b>AY1 LP32</b>	234.
<hr/>						
Next up straight post 		2"	2"	16"	<b>AY1 SP16</b>	223.

Order Code	Specification Information	Application Notes
Example: <b>AY1 LL16</b> <b>AY1</b> Stackable add-up <b>L</b> Screen application <b>L</b> Configuration <b>16</b> Height	Connector caps and connector trims are integral color trim grey.	Trim caps are specified by application to fill top corners of stackable add-up panels. Straight cap aligns adjacent add-up panels. End cap finishes the end of a run of add-up panels.  Stackable connectors join stackable add-up panels over a linkable screen connector. Next up connectors correspond to next up panels.

# Stackable add-up connectors and fillers

## service wall, T-end and linkable screen applications

Currents

description	type	w	d	h	pattern no.	list price
 Stackable accessories	Crown-mount masts (replacement)				<b>AY1 CMK</b>	\$45.
	High-low adapter kit				<b>AY1 HLA</b>	56.
	Linkable screen masts (replacement)				<b>AY1 MMK</b>	45.
	Stacking hardware kit (replacement)				<b>AY1 SMK</b>	33.
 90° 2-way L first up corner fillers		6"	6"	16"	<b>AY1 CL12</b>	334.
		6"	6"	25"	<b>AY1 CL21</b>	390.
		6"	6"	32"	<b>AY1 CL28</b>	445.
 90° 2-way L next up corner fillers		6"	6"	16"	<b>AY1 SCL16</b>	368.
 90° 3-way T corner fillers		7"	6"	16"	<b>AY1 CT12</b>	390.
		7"	6"	25"	<b>AY1 CT21</b>	445.
		7"	6"	32"	<b>AY1 CT28</b>	502.
 90° 3-way T next up corner fillers		7"	6"	16"	<b>AY1 SCT16</b>	423.

### Order Code

Example: <b>AY1 CL28</b>
<b>AY1</b> Stackable add-up
<b>CL</b> Connector type
<b>28</b> Height

### Specification Information

Stackable add-up fillers and trim are trim grey finish.

### Application Notes

Hi-low adapter kit includes an end cap and a bayonet with attachment holes to join stackable add-up panels in a straight high/low configuration. The adapter also adapts a corner, T, or X post for high/low corner configurations.

Corner fillers join stackable add-ups and fill the space above a Currents service wall L or T connection.

T-end extension fillers fill the 1 1/8" or 3 1/2" space above the extending area of a T-end connection at the end of a service wall with stackable add-up panels.







T-end stackable fillers fill the 7"-wide space above a T-end when attached linkable screens or Morrison panels have stackable add-ups.

All fillers engage into the top corners of corresponding height stackable add-up panels.

# Stackable add-up connectors and fillers

## service wall, T-end and linkable screen applications

Currents

description	type	w	d	h	pattern no.	list price
 90° 4-way X corner fillers		7"	7"	16"	<b>AY1 CX12</b>	\$445.
		7"	7"	25"	<b>AY1 CX21</b>	502.
		7"	7"	32"	<b>AY1 CX28</b>	557.
 90° 4-way next up corner fillers		7"	7"	16"	<b>AY1 SCX16</b>	479.
 First up, T-end extension fillers	1" extension	1"	2"	16"	<b>AY1 X112</b>	156.
	1" extension	1"	2"	25"	<b>AY1 X121</b>	167.
	1" extension	1"	2"	32"	<b>AY1 X128</b>	179.
	3 1/2" extension	3 1/2"	2"	16"	<b>AY1 X312</b>	167.
	3 1/2" extension	3 1/2"	2"	25"	<b>AY1 X321</b>	179.
	3 1/2" extension	3 1/2"	2"	32"	<b>AY1 X328</b>	189.
 Next up 1" fillers		1"	2"	16"	<b>AY1 SX116</b>	167.
 Next up 3 1/2" fillers		3 1/2"	2"	16"	<b>AY1 SX316</b>	179.
 T-end stackable fillers	First up	7"	2"	16"	<b>AY1 AXT16</b>	234.
	First up	7"	2"	25"	<b>AY1 AXT25</b>	256.
	First up	7"	2"	32"	<b>AY1 AXT32</b>	279.
	Next up	7"	2"	16"	<b>AY1 AXST16</b>	234.

### Order Code

Example: <b>AY1 CL28</b>	
<b>AY1</b>	Stackable add-up
<b>CL</b>	Connector type
<b>28</b>	Height

### Specification Information

Stackable add-up fillers and trim are trim grey finish.

### Application Notes

Hi-low adapter kit includes an end cap and a bayonet with attachment holes to join stackable add-up panels in a straight high/low configuration. The adapter also adapts a corner, T, or X post for high/low corner configurations.

Corner fillers join stackable add-ups and fill the space above a Currents service wall L or T connection.

T-end extension fillers fill the 1 1/8" or 3 1/2" space above the extending area of a T-end connection at the end of a service wall with stackable add-up panels.

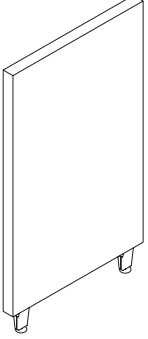
T-end stackable fillers fill the 7"-wide space above a T-end when attached linkable screens or Morrison panels have stackable add-ups.

All fillers engage into the top corners of corresponding height stackable add-up panels.

# Linkable screens

*glazed, translucent, and perforated*

Currents

description	type	w	d	h	pattern no.	glazed G(C/S/T)	fiberglass TC	perforated H
	39"H	24"	2"	39"	<b>AP1 3924( )</b>	\$709.	\$1,042.	\$1,426.
		36"	2"	39"	<b>AP1 3936( )</b>	850.	1,308.	1,861.
		48"	2"	39"	<b>AP1 3948( )</b>	1,022.	1,660.	2,384.
		60"	2"	39"	<b>AP1 3960( )</b>	n/a	1,894.	2,785.
	48"H	18"	2"	48"	<b>AP1 4818( )</b>	708.	n/a	n/a
		24"	2"	48"	<b>AP1 4824( )</b>	781.	1,181.	1,648.
		30"	2"	48"	<b>AP1 4830( )</b>	866.	n/a	n/a
		36"	2"	48"	<b>AP1 4836( )</b>	937.	1,394.	2,088.
		42"	2"	48"	<b>AP1 4842( )</b>	1,043.	n/a	n/a
		48"	2"	48"	<b>AP1 4848( )</b>	1,125.	1,805.	2,712.
		60"	2"	48"	<b>AP1 4860( )</b>	n/a	2,128.	3,242.
	64"H	18"	2"	64"	<b>AP1 6418( )</b>	823.	n/a	n/a
		24"	2"	64"	<b>AP1 6424( )</b>	924.	1,464.	2,111.
		30"	2"	64"	<b>AP1 6430( )</b>	1,010.	n/a	n/a
		36"	2"	64"	<b>AP1 6436( )</b>	1,110.	1,827.	2,752.
		42"	2"	64"	<b>AP1 6442( )</b>	1,196.	n/a	n/a
		48"	2"	64"	<b>AP1 6448( )</b>	1,327.	2,356.	3,565.
		60"	2"	64"	<b>AP1 6460( )</b>	n/a	2,735.	n/a

## Order Code

Example:	<b>AP1 3924 GT 612</b>
<b>AP1</b>	Currents screen
<b>39</b>	Height
<b>24</b>	Width
<b>G</b>	Surface type
<b>T</b>	Surface finish
<b>612</b>	Frame finish

## Specification Information

*Surface types:*  
 G Glazed  
 TC Translucent fiberglass  
 H Perforated  
*For glazed panels specify:*  
 C Clear acrylic  
 S Smoked acrylic  
 T Translucent acrylic  
 Perforated surface is light grey.

*Specify painted finish for glazed panel frame.*

Top cap and linkable screen legs are trim grey.

## Application Notes

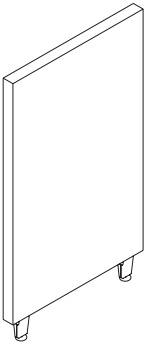
Linkable screens divide workstations perpendicular to service wall where base raceway is not required. Linkable screens connect with standard Morrison/Currents wall starters and Currents linkable screen connectors.

Screens are supported by two legs with leveling glides and include Currents top cap. Specify connectors separately (see pages 45 and 46).

Glazed linkable screens use Morrison glazed panel construction. Fiberglass and perforated screen surfaces are bonded to D-frame panel construction.

# Linkable screens upholstered

Currents

description	type	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
Screens 	39"H	18"	2 1/4"	39"	<b>AP1 3918 N()</b>	\$244.	\$270.	\$285.	\$326.	\$339.	\$360.	\$397.	\$415.	\$437.
		24"	2 1/4"	39"	<b>AP1 3924 N()</b>	276.	306.	322.	368.	383.	408.	448.	470.	494.
		30"	2 1/4"	39"	<b>AP1 3930 N()</b>	298.	332.	348.	399.	415.	441.	486.	511.	536.
		36"	2 1/4"	39"	<b>AP1 3936 N()</b>	334.	371.	390.	445.	463.	493.	543.	570.	598.
		42"	2 1/4"	39"	<b>AP1 3942 N()</b>	376.	418.	440.	503.	523.	557.	614.	644.	675.
		48"	2 1/4"	39"	<b>AP1 3948 N()</b>	410.	456.	478.	547.	569.	605.	667.	700.	735.
		60"	2 1/4"	39"	<b>AP1 3960 N()</b>	477.	529.	556.	634.	661.	704.	775.	n/a	n/a
	48"H	18"	2 1/4"	48"	<b>AP1 4818 N()</b>	287.	318.	333.	381.	397.	422.	465.	488.	513.
		24"	2 1/4"	48"	<b>AP1 4824 N()</b>	324.	360.	378.	433.	450.	479.	526.	552.	580.
		30"	2 1/4"	48"	<b>AP1 4830 N()</b>	352.	391.	411.	469.	489.	520.	572.	600.	630.
		36"	2 1/4"	48"	<b>AP1 4836 N()</b>	395.	438.	460.	525.	547.	583.	641.	673.	706.
		42"	2 1/4"	48"	<b>AP1 4842 N()</b>	443.	492.	517.	591.	617.	655.	721.	756.	794.
		48"	2 1/4"	48"	<b>AP1 4848 N()</b>	483.	536.	563.	643.	670.	712.	784.	823.	864.
		60"	2 1/4"	48"	<b>AP1 4860 N()</b>	562.	624.	655.	749.	780.	830.	913.	n/a	n/a
	64"H	18"	2 1/4"	64"	<b>AP1 6418 A()</b>	372.	413.	435.	495.	517.	549.	604.	634.	667.
		24"	2 1/4"	64"	<b>AP1 6424 A()</b>	410.	456.	478.	547.	569.	605.	667.	700.	735.
		30"	2 1/4"	64"	<b>AP1 6430 A()</b>	460.	512.	537.	615.	640.	679.	749.	785.	824.
		36"	2 1/4"	64"	<b>AP1 6436 A()</b>	497.	553.	582.	665.	693.	736.	810.	850.	893.
		42"	2 1/4"	64"	<b>AP1 6442 A()</b>	549.	610.	641.	733.	763.	812.	893.	938.	985.
		48"	2 1/4"	64"	<b>AP1 6448 A()</b>	588.	653.	684.	783.	816.	867.	955.	1,003.	1,052.
		60"	2 1/4"	64"	<b>AP1 6460 A()</b>	667.	739.	777.	888.	925.	983.	1,082.	n/a	n/a

## Order Code

Example: <b>AP1 3924 N15</b>
<b>AP1</b> Currents screen
<b>39</b> Height
<b>24</b> Width
<b>N</b> Surface type
<b>15</b> Fabric group

## Specification Information

*Surface types:*

N	Upholstered
A	High performance acoustical upholstered

*Specify fabric group:*

10	Fabric group 10
15	Fabric group 15
20	Fabric group 20
30	Fabric group 30
35	Fabric group 35
40	Fabric group 40
45	Fabric group 45
50	Fabric group 50
55	Fabric group 55

Top cap and linkable screen legs are trim grey.

## Application Notes

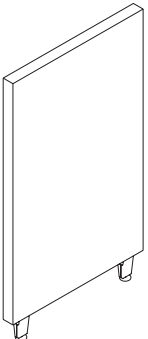
Linkable screens divide workstations perpendicular to service wall where base raceway is not required. Linkable screens connect with standard Morrison/Currents wall starters and Currents linkable screen connectors.

Screens are supported by two legs with leveling glides and include Currents top cap. Specify connectors separately.

Upholstered 39" and 48" screens use Morrison Options panel construction. Upholstered 64" screens use high performance acoustical Morrison panel construction.

# Linkable screens

*marker surface both sides*

description	type	w	d	h	pattern no.	list price
	48"H	24"	2 1/8"	48"	<b>AP1 4824M</b>	\$555.
		30"	2 1/8"	48"	<b>AP1 4830M</b>	598.
		36"	2 1/8"	48"	<b>AP1 4836M</b>	660.
		42"	2 1/8"	48"	<b>AP1 4842M</b>	740.
		48"	2 1/8"	48"	<b>AP1 4848M</b>	829.
	64"H	24"	2 1/8"	64"	<b>AP1 6424M</b>	629.
		30"	2 1/8"	64"	<b>AP1 6430M</b>	713.
		36"	2 1/8"	64"	<b>AP1 6436M</b>	811.
		42"	2 1/8"	64"	<b>AP1 6442M</b>	901.
		48"	2 1/8"	64"	<b>AP1 6448M</b>	1,006.

**Order Code**

Example: <b>AP1 4824M</b>
<b>AP1</b> Currents screen
<b>48</b> Height
<b>24</b> Width
<b>M</b> Surface type

**Specification Information**

*Surface types:*  
**M** Marker surface  
 Top cap and linkable screen legs are trim grey.

**Application Notes**

Linkable screens divide workstations perpendicular to service wall where base raceway is not required. Linkable screens connect with standard Morrison/Currents wall starters and Currents linkable screen connectors.

Screens are supported by two legs with leveling glides and include Currents top cap. Specify connectors separately.

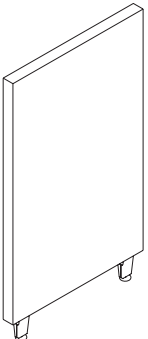
Marker surface linkable screens use Morrison veneer panel construction.



# Linkable screens

## marker/upholstered combination

Currents

description	type	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
	48"H	24"	2 1/8"	48"	<b>AP1 4824M( )</b>	\$439.	\$460.	\$467.	\$496.	\$505.	\$520.	\$544.	\$556.	\$574.
		30"	2 1/8"	48"	<b>AP1 4830M( )</b>	477.	494.	503.	535.	543.	560.	590.	603.	624.
		36"	2 1/8"	48"	<b>AP1 4836M( )</b>	524.	547.	553.	590.	600.	622.	652.	668.	691.
		42"	2 1/8"	48"	<b>AP1 4842M( )</b>	592.	615.	623.	664.	673.	696.	732.	750.	776.
		48"	2 1/8"	48"	<b>AP1 4848M( )</b>	655.	679.	688.	733.	751.	782.	810.	830.	858.
	64"H	24"	2 1/8"	64"	<b>AP1 6424M( )</b>	514.	546.	552.	591.	606.	636.	667.	682.	707.
		30"	2 1/8"	64"	<b>AP1 6430M( )</b>	579.	614.	621.	664.	679.	708.	738.	757.	784.
		36"	2 1/8"	64"	<b>AP1 6436M( )</b>	643.	679.	691.	734.	754.	788.	817.	838.	866.
		42"	2 1/8"	64"	<b>AP1 6442M( )</b>	706.	753.	763.	813.	830.	860.	896.	919.	951.
		48"	2 1/8"	64"	<b>AP1 6448M( )</b>	805.	855.	865.	918.	938.	973.	1,017.	1,043.	1,078.

### Order Code

Example:	<b>AP1 4824M20</b>
<b>AP1</b>	Currents screen
<b>48</b>	Height
<b>24</b>	Width
<b>M</b>	Surface type
<b>20</b>	Fabric group

### Specification Information

*Specify fabric group:*

10	Fabric group 10
15	Fabric group 15
20	Fabric group 20
30	Fabric group 30
35	Fabric group 35
40	Fabric group 40
45	Fabric group 45
50	Fabric group 50
55	Fabric group 55

Top cap and linkable screen legs are trim grey.

### Application Notes



Linkable screens divide workstations perpendicular to service wall where base raceway is not required. Linkable screens connect with standard Morrison/Currents wall starters and Currents linkable screen connectors.

Screens are supported by two legs with leveling glides and include Currents top cap. Specify connectors separately.

Combination upholstered screens use Morrison veneer/combination panel construction.

# Linkable screens trim

Currents

description	type	w	d	h	pattern no.	price
End trim, linkable screens (no connector) 	39" screen	–	2"	39"	<b>AA139E</b>	\$33.
	48" screen	–	2"	48"	<b>AA148E</b>	34.
	64" screen	–	2"	64"	<b>AA164E</b>	35.
Raceway cover for Currents end connector or end trim on Morrison panel					<b>AA1RE()</b>	21.
Top trim, linkable screens (replacement part) 		6"	2"	–	<b>AA1T06</b>	8.
		18"	2"	–	<b>AA1T18</b>	10.
		24"	2"	–	<b>AA1T24</b>	12.
		30"	2"	–	<b>AA1T30</b>	16.
		36"	2"	–	<b>AA1T36</b>	18.
		42"	2"	–	<b>AA1T42</b>	19.
		48"	2"	–	<b>AA1T48</b>	21.
	60"	2"	–	<b>AA1T60</b>	24.	
Linkable screen feet, pair (replacement part)					<b>AP1 LF</b>	45.
Carpet grips (set of 10)					<b>MM2-CG</b>	15.
Non-skid pads (set of 10)					<b>AA1NSK</b>	27.

## Order Code

Example: <b>AA1 T06</b>
<b>AA1 T</b> Top trim, panel
<b>06</b> Width

## Specification Information

*Specify painted finish for raceway cover for Currents end connector.*

End and top trims are trim grey integral finish.

Linkable screen legs are trim grey.

## Application Notes

End trim is economical vertical trim cover for linkable screen where no end connector (or cantilever track) is required. End trim includes top cap.

Raceway cover encloses end of Morrison panel raceway under Currents end trim or end connector.






Top trim corresponds in width to linkable screens or Morrison panels. No Currents top trim is available for Morrison connectors (specify linkable screen connectors).

Top caps are included with Currents screen connectors.

Linkable screen feet may be ordered to convert Morrison panels with raceway to Currents linkable screens.

# Linkable screens

## 90° and end connectors



description	type	w	d	h	pattern no.	no finish	trim grey
 Connector track	No trim	–	–	39"	<b>MC1-39S1</b>	\$36.	
	No trim	–	–	48"	<b>MC1-48S1</b>	40.	
	No trim	–	–	64"	<b>MC1-64S1</b>	44.	
 90° 2-way L		2"	2"	39"	<b>AC1 39L2</b>		111.
		2"	2"	48"	<b>AC1 48L2</b>		116.
		2"	2"	64"	<b>AC1 64L2</b>		125.
 90° 3-way T		2 1/4"	2"	39"	<b>AC1 39T3</b>		140.
		2 1/4"	2"	48"	<b>AC1 48T3</b>		148.
		2 1/4"	2"	64"	<b>AC1 64T3</b>		160.
 90° 4-way X		2 1/4"	2 1/4"	39"	<b>AC1 39X4</b>	164.	
		2 1/4"	2 1/4"	48"	<b>AC1 48X4</b>	183.	
		2 1/4"	2 1/4"	64"	<b>AC1 64X4</b>	204.	
 End connector (with connector track)		1"	2"	39"	<b>AC1 39E1</b>		49.
		1"	2"	48"	<b>AC1 48E1</b>		53.
		1"	2"	64"	<b>AC1 64E1</b>		59.

Order Code	Specification Information	Application Notes
Example: <b>AC1 39L2</b>	All top and vertical trim is trim grey integral color surface.	Connectors join linkable screens or Morrison panels in straight or 90° post configurations.
<b>AC1</b> Linkable screen connector	Connector post is painted black extrusion.	Linkable screen connectors include connector tracks, universal posts and top and vertical trim (where required).
<b>39</b> Height	Carpet grips are black integral color surface.	Connector tracks have cantilever slots for worksurface and storage support.
<b>L2</b> 90° 2-way L		L, T and X connectors include a universal post and 2, 3 or 4 connector tracks and top cap.
		End trim may be specified instead of an end connector if cantilever capability is not required.
		Carpet grips snap into linkable screen glides to prevent components from sliding. Glide rotates in carpet grip to permit levelling.
		Non-skid grips snap into glides to prevent sliding on hard surface floors.

# Linkable screens

## 120° connectors

Currents

description	h	pattern no.	list price
120°, 2-way 	39"	<b>AC1 39V2</b>	\$123.
	48"	<b>AC1 48V2</b>	128.
	64"	<b>AC1 64V2</b>	139.
120°, 3-way 	39"	<b>AC1 39Y3</b>	151.
	48"	<b>AC1 48Y3</b>	156.
	64"	<b>AC1 64Y3</b>	167.

### Order Code

Example: <b>AC1 39V2</b>
<b>AC1</b> Linkable screen connector
<b>39</b> Height
<b>V2</b> 120° 2-way

### Specification Information

All top and vertical trim is trim grey integral color surface.

Connector post is painted black extrusion.






Carpet grips are black integral color surface.

### Application Information

Connectors join linkable screens or Morrison panels in straight, 90° or 120° post configurations.

The connectors include connector tracks, a triangular post and top and vertical trim (where required).

# Wall-connected screens *translucent surfaces*

description	w	d	h	pattern no.	translucent
 39" H wall-connected screen	24"	2"	39"	<b>AF 3924 TCP ( )</b>	\$877.
	36"	2"	39"	<b>AF 3936 TCP ( )</b>	951.
	48"	2"	39"	<b>AF 3948 TCP ( )</b>	1,023.
	60"	2"	39"	<b>AF 3960 TCP ( )</b>	1,243.
	72"	2"	39"	<b>AF 3972 TCP ( )</b>	1,462.
 48" H wall-connected screen	24"	2"	48"	<b>AF 4824 TCP ( )</b>	1,023.
	36"	2"	48"	<b>AF 4836 TCP ( )</b>	1,097.
	48"	2"	48"	<b>AF 4848 TCP ( )</b>	1,170.
	60"	2"	48"	<b>AF 4860 TCP ( )</b>	1,389.
	72"	2"	48"	<b>AF 4872 TCP ( )</b>	1,610.
 64" H wall-connected screen	24"	2"	64"	<b>AF 6424 TCP ( )</b>	1,170.
	36"	2"	64"	<b>AF 6436 TCP ( )</b>	1,389.
	48"	2"	64"	<b>AF 6448 TCP ( )</b>	1,610.
	60"	2"	64"	<b>AF 6460 TCP ( )</b>	1,901.
 Screen starter	4"	1"	16"	<b>AA1B( )</b>	114.
 Screen-to-worksurface bracket				<b>AFWB</b>	58.

### Order Code

Example:	<b>AF 4872 TCP 612</b>
<b>AF</b>	Screen
<b>48</b>	Height
<b>72</b>	Width
<b>T</b>	Surface type
<b>C</b>	Surface finish
<b>P</b>	Base type
<b>612</b>	Base finish

### Specification Information

*Surface types:*  
**T** Translucent  
*Surface finishes:*  
**C** Crystal  
 Specify base and screen starter paint finish.  
*Base type:*  
**P** Wall-connected

### Application Notes

Translucent screens have full surfaces of luminous fiberglass enclosing a lightweight, rigid frame. Continuous edge trim is trim grey.

Wall connected screens have one support post with levelling glide.

Wall connected screens attach to service wall or Currents T-end only, and cannot be linked.

Specify screen starter to connect screen perpendicular to service wall face. Clamp bracket attaches wall-connected screen anywhere along structural base. Outside surface of screen at end of wall will be approximately 1" from end.



No screen starter is needed to attach service wall-connected screen to corresponding height Currents T-end at end of spine.

Screen-to-worksurface bracket stabilizes wall-connected screen by attaching to underside of worksurface at any height.

Specify left or right end of worksurface.

# Mobile screens

*translucent, perforated and upholstered surfaces*

description	type	w	d	h	pattern no.	non-upholstered									
						10	15	20	30	35	40	45	50	55	
 Mobile screen, translucent	48"H	48"	2"	48"	<b>AF 4848 TCM ( )</b>	\$1,317.									
		60"	2"	48"	<b>AF 4860 TCM ( )</b>	1,536.									
		72"	2"	48"	<b>AF 4872 TCM ( )</b>	1,756.									
	64"H	48"	2"	64"	<b>AF 6448 TCM ( )</b>	1,756.									
		60"	2"	64"	<b>AF 6460 TCM ( )</b>	2,049.									
	 Mobile screen, upholstered	48"H	48"	2"	48"	<b>AF 4848 AM ( )( )</b>	1,264.	1,299.	1,334.	1,406.	1,440.	1,477.	1,511.	1,583.	1,654.
60"			2"	48"	<b>AF 4860 AM ( )( )</b>	1,381.	1,416.	1,453.	1,524.	1,560.	1,594.	1,629.	1,700.	1,772.	
64"H		48"	2"	64"	<b>AF 6448 AM ( )( )</b>	1,371.	1,416.	1,464.	1,560.	1,606.	1,654.	1,700.	1,795.	1,890.	
		60"	2"	64"	<b>AF 6460 AM ( )( )</b>	1,606.	1,654.	1,700.	1,795.	1,842.	1,890.	1,936.	2,031.	2,126.	

Order Code	Specification Information	Application Notes
Example: <b>AF 4872 TCM 612</b>	<i>Surface types:</i>	Translucent screens have full surfaces of luminous fiberglass enclosing a lightweight, rigid frame. Continuous edge trim is trim grey.
<b>AF</b> Screen	T Translucent	
<b>48</b> Height	A Tackable upholstered	Upholstered screens are tackable, acoustical surface both sides. Continuous edge trim is trim grey.
<b>72</b> Width	<i>Surface finishes:</i>	
<b>T</b> Surface type	C Crystal	The bottom 15" of upholstered mobile screens consists of supporting ballast board and is not tackable area.
<b>C</b> Surface finish	<i>Specify base finish.</i>	
<b>M</b> Base type	<i>Base type:</i>	Mobile screens are supported by stabilizer feet.
<b>612</b> Base finish	M Mobile	
	<i>Specify fabric group:</i>	Non-locking casters to meet BIFMA stability standards.
	10 Fabric group 10	When ordering 60" wide upholstered screens, please check width of fabric selected.
	15 Fabric group 15	
	20 Fabric group 20	
	30 Fabric group 30	
	35 Fabric group 35	
	40 Fabric group 40	
	45 Fabric group 45	
	50 Fabric group 50	
	55 Fabric group 55	

# Crown-mounted screens *awning*

Currents

description	w	d	h	pattern no.	list price
Translucent awning	36"	24"	27"	<b>AA1C36T</b>	\$573.



## Order Code

Example:	<b>AA1 C36T</b>
<b>AA1</b>	Currents accessory
<b>C36</b>	Awning
<b>T</b>	Type

## Specification Information

*Finish for awning brackets:*  
Awning brackets are integral color trim grey finish.

## Application Notes


Awnings provide flexible light control in a workstation. Translucent awning is taut, white fabric. Awnings attach to top crown of Currents service wall at any point.

# Crown-mounted storage


## portable shelf and counter surfaces

Currents


description	w	d	h	pattern no.	lam.	V2	V3	paint
Portable shelf	24"	13"	15"	<b>AA1PS24( )</b>				\$459.



Counter surface	36"	12"	1"	<b>AW1 CS3612 ( )</b>	207.	309.	413.	
	48"	12"	1"	<b>AW1 CS4812 ( )</b>	229.	344.	459.	
	60"	12"	1"	<b>AW1 CS6012 ( )</b>	253.	379.	505.	
	72"	12"	1"	<b>AW1 CS7212 ( )</b>	275.	413.	550.	



Counter surface bracket kit				<b>AB1 CS ( )</b>				207.
-----------------------------	--	--	--	-------------------	--	--	--	------



### Order Code

Example:	<b>AA1 PS24 612</b>
<b>AA1</b>	Currents accessory
<b>PS</b>	Personal shelf
<b>24</b>	Width
<b>612</b>	Finish

### Specification Information

*Specify painted finish for shelf or surface finish for counter.*

### Application Notes




Portable shelf upmounts anywhere along service wall crown. High back provides 13"H x 22"W surround to 12" above crown, with integral handles and simple mounting clamps.

Counter surface with curved front is designed to mount on either side of 39"H wall crown with counter surface brackets. Kit includes two brackets and center support.



# Reuter open overhead



*Designed by Robert Reuter*

description	type	w	d	h	pattern no.	P1	P2	P3	V2
	Open overhead Morrison panel brackets	30"	13"	14 3/4"	<b>RO3-OM30( )</b>	\$402.	\$402.	\$423.	
		36"	13"	14 3/4"	<b>RO3-OM36( )</b>	461.	461.	484.	
		42"	13"	14 3/4"	<b>RO3-OM42( )</b>	520.	520.	546.	
		48"	13"	14 3/4"	<b>RO3-OM48( )</b>	579.	579.	609.	
		60"	13"	14 3/4"	<b>RO3-OM60( )</b>	674.	674.	707.	
		72"	13"	14 3/4"	<b>RO3-OM72( )</b>	791.	791.	832.	
	Open overhead no mounting hardware	30"	13"	14 3/4"	<b>RO3-ON30( )</b> →	390.	390.	410.	
		36"	13"	14 3/4"	<b>RO3-ON36( )</b> →	449.	449.	471.	
		42"	13"	14 3/4"	<b>RO3-ON42( )</b> →	509.	509.	535.	
		48"	13"	14 3/4"	<b>RO3-ON48( )</b> →	567.	567.	595.	
		60"	13"	14 3/4"	<b>RO3-ON60( )</b> →	661.	661.	696.	
		72"	13"	14 3/4"	<b>RO3-ON72( )</b> →		780.	818.	
	Vertical, set of 5	–	11"	12"	<b>RO3-VP</b> →				
		Horizontal, set of 10	6"	11"	–	<b>RO1-HP6</b>			
	9"		11"	–	<b>RO1-HP9</b> →				
	12"		11"	–	<b>RO1-HP12</b> →				
	15"		11"	–	<b>RO1-HP15</b>				
Door retrofit kit, no lock	For open overhead	30"			<b>RO3-RD30( )N</b>	209.	209.	219.	n/a
		36"			<b>RO3-RD36( )N</b>	242.	242.	254.	n/a
		42"			<b>RO3-RD42( )N</b>	292.	292.	307.	n/a
		48"			<b>RO3-RD48( )N</b>	323.	323.	340.	n/a
		60"			<b>RO3-RD60( )N</b>	470.	470.	494.	n/a
		72"			<b>RO3-RD72( )N</b>	542.	542.	569.	n/a

Order Code	Specification Information	Application Notes
Example: <b>RO3-OM24-612</b>	<i>Specify finish for case and door.</i>	<p>Interior partitions are black painted steel finish.</p> <p>Door retrofit kits convert an open overhead to an enclosed cabinet and include Reuter overhead door, left and right arm mechanisms, and lock or lock plug.</p> <p>Reuter storage is a universal product applicable on Morrison or other Knoll systems. Open overheads may be mounted on any combination of vertical panels the same width or up to 12" less than shelf width.</p>
<b>RO1-O</b> Reuter open overhead		
<b>M</b> Morrison panel mounted		
<b>24</b> Width		
<b>612</b> Finish		
Products indicated with → are available on KnollNow.	<p>Reuter open overheads may be desk-mounted, mounted on other Knoll systems, cantilevered above panels, or wall-mounted. Specify open overhead with no mounting hardware, and brackets on page .</p> <p>Vertical interior partitions may be positioned on 1 1/2" increments of width anywhere across shelf, 1 1/2" in from each side. Vertical partitions contain cutouts for mounting three horizontal partitions at 2" increments on either or both sides. Horizontals are suspended between two verticals, and may be positioned end-to-end in any combination up to 3" less than shelf width. Available in sets of 10; 6", 9", 12", 15" widths.</p>	

# Reuter open shelf

*Designed by Robert Reuter*

description	type	w	d	h	pattern no.	P1	P2	P3
 Open shelf Morrison panel brackets		24"	13"	8"	<b>RS1-M24( )</b>	\$248.	\$248.	\$260.
		30"	13"	8"	<b>RS1-M30( )</b>	271.	271.	286.
		36"	13"	8"	<b>RS1-M36( )</b>	307.	307.	322.
		42"	13"	8"	<b>RS1-M42( )</b>	331.	331.	347.
		48"	13"	8"	<b>RS1-M48( )</b>	355.	355.	372.
		60"	13"	8"	<b>RS1-M60( )</b>	414.	414.	435.
 Open shelf no mounting hardware		24"	13"	8"	<b>RS1-N24( )</b> ➔	236.	236.	248.
		30"	13"	8"	<b>RS1-N30( )</b> ➔	261.	261.	274.
		36"	13"	8"	<b>RS1-N36( )</b> ➔	296.	296.	312.
		42"	13"	8"	<b>RS1-N42( )</b> ➔	319.	319.	335.
		48"	13"	8"	<b>RS1-N48( )</b> ➔	343.	343.	360.
		60"	13"	8"	<b>RS1-N60( )</b> ➔	402.	402.	423.

## Order Code

Example:	<b>RS1-M48-612</b>
<b>RS1</b>	Reuter shelf
<b>M</b>	Morrison panel mounted
<b>48</b>	Width
<b>612</b>	Finish

Products indicated with ➔ are available on KnollNow.

## Specification Information

*Specify paint finishes for shelf.*

## Application Notes


Interior partitions are black painted steel finish.


Reuter storage is a universal product applicable on Morrison or other Knoll systems.


Open shelves may be mounted on any combination of vertical panels the same width. Reuter open shelves may be Morrison Network desk-mounted, mounted on other Knoll systems, cantilevered above panels, or wall-mounted. Specify Reuter shelves with no mounting hardware, and brackets on page 0 and 92.


Vertical interior partitions may be positioned on 1 1/2" increments of width anywhere across shelf, 1 1/2" in from each side. Vertical partitions contain cutouts for mounting three horizontal partitions at 2" increments on either or both sides. Horizontals are suspended between two verticals, and may be positioned end-to-end in any combination up to 3" less than shelf width. Available in sets of 10; 6", 9", 12", 15" widths.

Reuter overhead cabinet  
*desk, wall, or other Knoll system mounted*  
*Designed by Robert Reuter*

description	type	w	d	h	pattern no.	P1	P2	P3	V2
Enclosed cabinet, with lock (no mounting hardware) - One door 		24"	14 1/4"	14 3/4"	<b>RO3-N24( ) ( )L</b>	\$546.	\$546.	\$573.	\$824.
		30"	14 1/4"	14 3/4"	<b>RO3-N30( ) ( )L</b> ➔	610.	610.	641.	889.
		36"	14 1/4"	14 3/4"	<b>RO3-N36( ) ( )L</b> ➔	705.	705.	740.	997.
		42"	14 1/4"	14 3/4"	<b>RO3-N42( ) ( )L</b> ➔	817.	817.	859.	1,109.
		48"	14 1/4"	14 3/4"	<b>RO3-N48( ) ( )L</b> ➔	913.	913.	958.	1,216.

Enclosed cabinet, with lock (no mounting hardware) - Two doors 		60"	14 1/4"	14 3/4"	<b>RO3-N60( ) ( )L</b> ➔	1,156.	1,156.	1,214.	1,676.
		66"	14 1/4"	14 3/4"	<b>RO3-N66( ) ( )L</b>	1,264.	1,264.	1,326.	1,795.
		72"	14 1/4"	14 3/4"	<b>RO3-N72( ) ( )L</b> ➔	1,351.	1,351.	1,418.	1,896.

Enclosed cabinet, no lock (no mounting hardware) - One door 		24"	14 1/4"	14 3/4"	<b>RO3-N24( ) ( )N</b>	491.	491.	516.	n/a
		30"	14 1/4"	14 3/4"	<b>RO3-N30( ) ( )N</b>	557.	557.	586.	n/a
		36"	14 1/4"	14 3/4"	<b>RO3-N36( ) ( )N</b>	652.	652.	684.	n/a
		42"	14 1/4"	14 3/4"	<b>RO3-N42( ) ( )N</b>	764.	764.	803.	n/a
		48"	14 1/4"	14 3/4"	<b>RO3-N48( ) ( )N</b>	858.	858.	901.	n/a

Enclosed cabinet, no lock (no mounting hardware) - Two doors 		60"	14 1/4"	14 3/4"	<b>RO3-N60( ) ( )N</b>	1,048.	1,048.	1,100.	n/a
		66"	14 1/4"	14 3/4"	<b>RO3-N66( ) ( )N</b>	1,155.	1,155.	1,213.	n/a
		72"	14 1/4"	14 3/4"	<b>RO3-N72( ) ( )N</b>	1,245.	1,245.	1,307.	n/a

**Order Code**

Example:	<b>RO3-N48-P-L-613-P-613</b>
<b>RO3</b>	Reuter overhead cabinet
<b>N</b>	No brackets
<b>48</b>	Width
<b>P</b>	With pull
<b>L</b>	With lock
<b>613</b>	Case finish
<b>P</b>	Front finish type
<b>613</b>	Front finish

**Specification Information**

*Specify finish for case and door.*

*Finish types for front:*

L	Laminate
P	Painted
V	Veneer

**Application Notes**

Reuter storage is a universal product applicable on Knoll systems.

Cabinet door rotates above cabinet on side pivots, counterbalanced by two pneumatic cylinders. Two-door cabinets have center divider and four pneumatic cylinders. Vertical interior partitions may be positioned on 1 1/2" increments of width anywhere across shelf, 1 1/2" in from each side. Vertical partitions contain cutouts for mounting up to five horizontal partitions at 2" increments on either or both sides.


Horizontals are suspended between two verticals, and may be positioned end-to-end in any combination up to 3" less than cabinet width. Available in sets of 10; 6", 9", 12", 15" widths.

Order locks for overheads with a KnollKey order form. Please note that Reuter overhead cabinets 60"W or wider require two lock cores.

Reuter overhead doors without locks include black, Knoll-logo insert, in the same position. Insert may be removed to retrofit a lock later.

Reuter ganging bracket  
*wall-mounting options and ADA pull*  
*Designed by Robert Reuter*

description	type	w	d	h	pattern no.	black
Ganging bracket					<b>RO1-GB</b>	\$12.
ADA pull					<b>RO1-PULL</b>	38.



**Order Code**

Example: <b>RO1-GB</b>
<b>RO1</b> Reuter overhead
<b>GB</b> Ganging bracket

Products indicated with → are available on KnollNow.






**Specification Information**

Wall mount frames are painted black finish.  
 ADA pull is stainless steel.

**Application Notes**

Wall mount frames secure Reuter overhead cabinet or shelf to wall (frame/wall mounting hardware is not included). Frame is concealed behind storage. Use two RO1-WMF2 to wall-mount 66"- and 72"-wide Reuter overheads.  
 Reuter open shelves 66" and 72"W are for stanchion support only.  
 Wall mount wire manager is two-part wire concealment kit, 22"H (medium grey only).  
 Ganging bracket joins adjacent Reuter overheads or shelves for additional stiffness and alignment when storage is planned on only one side of a panel run.

ADA pull mounts to Reuter painted front overhead door to allow seated users to close door easily. Specify one for each cabinet 24" - 48", two for cabinets 60" - 72".  
 ADA pull cannot be mounted on wood front Reuter doors.

description	type	watts	w	d	h	pattern no.	black	paint
 High efficiency task light	For 24"-48" cabinet	15	18"	4"	2"	<b>RT1-T18(L/R)-()</b>	\$286.	\$297.
	For 30"-72" cabinet	17	24"	4"	2"	<b>RT1-T24(L/R)-()</b> ➔	318.	330.
	For 42"-72" cabinet	25	36"	4"	2"	<b>RT1-T36(L/R)-()</b> ➔	343.	355.
	For 60"-72" cabinet	32	48"	4"	2"	<b>RT1-T48(L/R)-()</b> ➔	364.	378.
 High efficiency task light with dimmer	For 24"-48" cabinet	15	18"	4"	2"	<b>RT1-TD18(L/R)-()</b>	340.	353.
	For 30"-72" cabinet	17	24"	4"	2"	<b>RT1-TD24(L/R)-()</b>	372.	385.
	For 42"-72" cabinet	17	36"	4"	2"	<b>RT1-TD36(L/R)-()</b>	396.	408.
	For 60"-72" cabinet	32	48"	4"	2"	<b>RT1-TD48(L/R)-()</b>	418.	432.
 Task light	For 24"-48" cabinet	15	18"	4"	2"	<b>RT2-F18(L/R)-()</b>	187.	199.
	For 30"-72" cabinet	20	24"	4"	2"	<b>RT2-F24(L/R)-()</b> ➔	201.	212.
	For 42"-72" cabinet	30	36"	4"	2"	<b>RT2-F36(L/R)-()</b> ➔	216.	228.
	For 60"-72" cabinet	40	48"	4"	2"	<b>RT2-F48(L/R)-()</b>	235.	246.
 Task light with dimmer	For 24"-48" cabinet	15	18"	4"	2"	<b>RT2-FD18(L/R)-()</b>	241.	252.
	For 30"-72" cabinet	20	24"	4"	2"	<b>RT2-FD24(L/R)-()</b>	255.	268.
	For 42"-72" cabinet	30	36"	4"	2"	<b>RT2-FD36(L/R)-()</b>	270.	281.
	For 60"-72" cabinet	40	48"	4"	2"	<b>RT2-FD48(L/R)-()</b>	290.	302.
 Task light with electronic ballast	For 24"-48" cabinet	15				<b>RT1T18E(L/R) ()</b>	321.	334.
	For 30"-72" cabinet	20				<b>RT1T24E(L/R) ()</b>	355.	366.
	For 42"-72" cabinet	30				<b>RT1T36E(L/R) ()</b>	379.	390.
	For 60"-72" cabinet	40				<b>RT1T48E(L/R) ()</b>	401.	413.

**Order Code**

Example:	<b>RT1-TD36-L-612</b>
<b>RT1</b>	Reuter task light
<b>T</b>	High efficiency
<b>D</b>	With dimmer
<b>36</b>	Width
<b>L</b>	Cord exit left
<b>612</b>	Paint finish

Products indicated with ➔ are available on KnollNow.


**Specification Information**

Specify left or right cord exit.  
 Specify suffix -NY for New York City installations. ➔  
 Specify suffix -CH and add \$45. list for City of Chicago installations. ➔  
 Specify finish.

**Application Notes**

Reuter task lights mount into a recess in the underside of Reuter overhead cabinets and Reuter open shelves. Cabinet width must be at least 6" wider than task light width.  
 High efficiency lights include Octron lamp, 9' grounded cordset, untinted batwing lens, rocker switch, and integral mounting hardware.  
 Task lights include fluorescent cool white lamp, 9' grounded cordset, prismatic lens, rocker switch and integral mounting hardware.  
 Lights with dimmer include 3-position rocker switch.





description	type	w	d	h	pattern no.	black	paint
Morrison Options and Series 2 Morrison overhead downmount brackets and back panel (64"H wall only)		24"			<b>AA1LO24DN( )</b>		\$200.
		30"			<b>AA1LO30DN( )</b>		207.
		36"			<b>AA1LO36DN( )</b>		212.
		42"			<b>AA1LO42DN( )</b>		217.
		48"			<b>AA1LO48DN( )</b>		223.
Morrison shelf downmount brackets (64"H wall only)					<b>AA1RSXDN ( )</b>		144.
Equity overhead brackets	Downmount bracket				<b>AA1EDWS</b>		63.
	Upmount bracket (pair) (64")				<b>AA1ECUP64</b>		200.
	Upmount bracket (pair) (65")				<b>AA1ECUP65</b>		200.
Reuter overhead brackets	Downmount brackets (pair) (64"H wall only)				<b>AA1RODN( )</b>		173.
	Extended upmount brackets (pair) (39"H wall)				<b>AA1ROXUP( )</b>		344.
	Upmount brackets (pair)				<b>AA1ROUP( )</b>		173.
Reuter shelf brackets	Extended downmount brackets (pair) (64"H wall only)				<b>AA1RSXDN( )</b>		144.
	Reuter shelf adapter brackets				<b>RS1 MPB</b>		30.
	Shelf downmount brackets (pair) (39"H or 48"H wall only)				<b>AA1RSDN( )</b>		173.
	Shelf extended upmount brackets (pair) (39"H wall)				<b>AA1RSXUP( )</b>		344.
	Shelf upmount brackets (pair)				<b>AA1RSUP( )</b>		173.



Order Code	Specification Information	Application Notes
Example: <b>AA1-LO48 DN 612</b>	<i>Specify painted finish for shelf downmount brackets and overhead downmount kit.</i>	<p><b>Morrison</b> downmount brackets support Morrison or Options shelves and brackets on 64"H service wall.</p> <p>Overhead downmount bracket kits include back panel and brackets to suspend Options overhead cabinets from 64"H service wall crown.</p> <p><b>Equity</b> downmount bracket attaches an Equity overhead to a 64"H Currents wall. Specify two brackets - one for each end of overhead unit. Upmount brackets are used with 48"H Currents wall and can be specified to align the top of the overhead at 64" or 65" of total height. A back must always be specified for the Equity overhead when mounting on the Currents wall (see Equity price list).</p> <p><b>Reuter</b> upmount brackets attach overhead cabinet or shelf anywhere along panel crown, lifting 1" above nominal wall height. Extended upmount brackets lift self to 10" above nominal wall height.</p>
<b>AA1</b> Currents accessory		
<b>LO</b> Options overhead		
<b>48</b> Size		
<b>DN</b> Configuration		
<b>612</b> Finish	<p>Downmount brackets attach overheads within the upper 16" of 64"H walls and open shelves within the upper 9" of 48" or 39"H walls.</p> <p>Specify an extra bracket (one-half pair) for center support of overhead cabinets wider than 60" and shelves wider than 54".</p> <p>Upmount or downmount brackets may be inset to permit overhead to extend 1" or 3" and shelf to extend 3" beyond the end of the spine at T-ends.</p> <p>Extended downmount brackets enable the Reuter open shelf to be mounted from 49"-56"H on 64" service all. Specify shelf adapter brackets separately.</p> <p>For brackets for use with <b>Dividends</b> and Series 2 for Dividends overheads, please consult the Dividends price list - page. 101.</p>	

# Ambient lighting canopy and uplights

Currents

description	type	w	d	h	pattern no.	watts	light grey
 Canopy uplight	39" H wall	24"	24"	40"	<b>AL1 C39</b>	32	\$1,263.
	48" H wall	24"	24"	31"	<b>AL1 C48</b>	32	1,263.
	64" H wall	24"	24"	15"	<b>AL1 C64</b>	32	1,263.
 Linear uplight, 18"W	39" H wall	18"	8"	30"	<b>AL1 A3918</b>	72	1,263.
	48" H wall	18"	8"	21"	<b>AL1 A4818</b>	72	1,263.
	64" H wall	18"	8"	5"	<b>AL1 A6418</b>	72	1,263.
 Linear uplight, 24"W	39" H wall	24"	8"	30"	<b>AL1 A3924</b>	100	1,721.
	48" H wall	24"	8"	21"	<b>AL1 A4824</b>	100	1,721.
	64" H wall	24"	8"	5"	<b>AL1 A6424</b>	100	1,721.
 Awning uplight	48" or 64"H wall	9"	8"	5"	<b>AL1 AA</b>	32	918.

## Order Code

Example:	<b>AL1 C48</b>
<b>AL1</b>	Lighting
<b>C</b>	Canopy
<b>48</b>	Mounting height

## Specification Information

Canopy is white perforated aluminum. Light fixtures and posts are light grey finish.

Canopy and uplights utilize electronic ballasts, and 9' cordset.

Canopy and awning uplight have a single 32 watt tri-bi-axial compact fluorescent lamp.

18" linear uplight has two 36 watt bi-axial compact fluorescent lamps.

24" linear uplight has two 50 watt bi-axial compact fluorescent lamps.

For City of Chicago applications, specify fused cordset (suffix -CH), and add \$82. list.

## Application Notes

Canopy, linear, and awning uplights attach to service wall crown, on either side at any point. Lights mounted back-to-back allow space between for add-up panels.

Canopy and linear uplight include rectangular post to position top of light fixture at 73"H. Awning uplight mounts at 2" above crown for use under awning.

Canopy light is designed for interiors with high ceilings.


Integral white reflector of canopy is supported at 80"H.


Linear ambient uplights are designed for interiors with ceilings from 8' to 10' high.

All lights include vertical cord manager from crown to fixture.

Consult your Knoll representative for photometric information on Currents ambient lighting.

# Pedestals *mobile*

description	type	w	d	h	pattern no.	P1 / P2	P3	V2 front	V3 front
	2 file	15"	17"	26 1/2"	<b>AS1 SFF M ( ) ( )</b>	\$889.	\$934.	\$1,003.	\$1,128.
	Data/file	15"	17"	22"	<b>AS1 SDF M ( ) ( )</b>	842.	885.	953.	1,078.
	Personal/data/file	15"	17"	26 1/2"	<b>AS1 SPDF M ( ) ( )</b>	982.	1,031.	1,113.	1,256.

	2 file	15"	23"	26 1/2"	<b>AS1 DFF M ( ) ( )</b>	1,000.	1,050.	1,114.	1,240.
	Data/file	15"	23"	22"	<b>AS1 DDF M ( ) ( )</b>	954.	1,002.	1,064.	1,190.
	Personal/data/file	15"	23"	26 1/2"	<b>AS1 DPDF M ( ) ( )</b>	1,093.	1,148.	1,224.	1,369.

Standard mobile pedestal open top, with pull	Data/file	15"	17"	22"	<b>AS1 SDFO ( ) ( )</b>	786.	826.	896.	1,023.
--	-----------	-----	-----	-----	-------------------------	------	------	------	--------



Deep mobile pedestal open top, with pull	Data/file	15"	23"	22"	<b>AS1 DDFO ( ) ( )</b>	876.	920.	986.	1,112.
--	-----------	-----	-----	-----	-------------------------	------	------	------	--------



### Order Code

Example: **AS1 SDFM 612 612**

<b>AS1</b>	Pedestal
<b>S</b>	Depth
<b>DF</b>	Configuration
<b>M</b>	Mobile
<b>612</b>	Finish for case
<b>612</b>	Finish for fronts

### Specification Information

*Specify painted finish for case, painted or veneer finish for fronts.*

All pedestals include front lock with KnollKey lock system. Personal drawer is 4"H. Data drawer is 7"H. File drawers are 11"H. Deep file drawers include file support for letter (width) or legal (depth) suspended file folders. All drawers have full extension, ball bearing drawer slides.

### Application Notes

Mobile pedestals are independent storage components with locking casters and pull. Standard mobile pedestals roll under Currents worksurfaces set at 28" or higher. Deep mobile pedestals with two files or personal/data/file will not fit under stiffener of universal worksurface or Currents desk set at 29" or lower. Specify data/file mobile pedestal under worksurfaces adjusted lower than 28"H.




# Pedestals *floorstanding*

Currents

description	type	w	d	h	pattern no.	P1 / P2	P3	V2 front	V3 front
18"D Floorstanding pedestal	2 file	15"	17"	27"	<b>AS1-SFF G ( ) ( )</b>	\$644.	\$676.	\$757.	\$884.
	personal/data/file	15"	17"	27"	<b>AS1 SPDFG ( ) ( )</b>	737.	775.	867.	1,011.



24"D Floorstanding pedestal	2 file	15"	23"	27"	<b>AS1 DFF G ( ) ( )</b>	733.	770.	847.	972.
	personal/data/file	15"	23"	27"	<b>AS1 DPDFG ( ) ( )</b>	827.	867.	957.	1,101.



## Order Code

Example:	<b>AS1 SPDFG 612 612</b>
<b>AS1</b>	Pedestal
<b>S</b>	Depth
<b>PDF</b>	Configuration
<b>G</b>	Floorstanding
<b>612</b>	Finish for case
<b>612</b>	Finish for fronts

## Specification Information

*Specify painted finish for case, painted or veneer finish for fronts.*

All pedestals include front lock with KnollKey lock system. Personal drawer is 4"H. Data drawer is 7"H. File drawers are 11"H. Deep file drawers include file support for letter (width) or legal (depth) suspended file folders. All drawers have full extension, ball bearing drawer slides.



## Application Notes

Floorstanding pedestals include levelling glides and open top to support one end of a worksurface at 28"H. 18"D pedestals fit under any Currents worksurface with standard stiffener. Deep floorstanding pedestals fit under Currents worksurfaces for Morrison with properly sized replacement worksurface stiffener.

# Pedestal accessories

*pencil tray, drawer divider, file support rail, bumper kits*

Currents

description	type	w	d	h	pattern no.	price
Pencil tray 	Personal or data drawer				<b>AS1 PT</b>	\$29.
Drawer divider 	Personal or data drawer				<b>MD6-BD</b>	26.
File support rail	File drawer, set of 2				<b>MD6-FS</b>	11.
Bumper kits for mobile pedestal	21"H pedestal			21"	<b>AS1 BKL</b>	34.
	26"H pedestal			26"	<b>AS1 BKH</b>	40.

## Order Code

Example: **AS1 PT**

**AS1** Pedestal

**PT** Pencil tray

## Specification Information

Pencil tray is black molded plastic.  
Drawer divider is black painted steel.

Replacement worksurface stiffeners are black painted steel.

Bumper kit is trim grey plastic.

## Application Notes

Pencil tray sets in top of personal or data drawer. Moveable dividers organize pencils, pens, and paper clips in separate compartments.

Drawer divider mounts in slots in bottom of personal or data drawer. U-shaped divider supports two rows of four CDs with titles visible in data drawer.

File support spans width of file drawer to support side-to-side letter or legal width suspended files.

Bumper kit protects back corners of mobile pedestals and adjacent furniture. Bumper kit includes two corner-bead shape extrusions with self-adhesive backer.


# Pedestal accessories

Currents

*cushion*

*fabric*

Description	type	w	d	pattern no.	A	B	C	D	E	F	G	H	I
Cushion	Deep	15"	23"	<b>AS1 DPAD ( )</b>	\$179.	\$200.	\$234.	\$245.	\$267.	\$290.	\$323.	\$357.	\$368.
	Standard	15"	17"	<b>AS1 SPAD ( )</b>	145.	167.	189.	200.	212.	234.	256.	290.	301.



## Order Code

Example: **AS1 SPAD**

**AS1** Pedestal

**S** Depth

**PAD** Cushion

## Specification Information

There is a \$65 upcharge on CAL133 backing on the cushion.

Consult the Knoll seating price list for fabric information and grades.

## Application Notes

Pedestal cushions are for use on Currents open top mobile pedestals.


# Pedestal accessories

Currents

*cushion*

*leather*

Description	type	w	d	pattern no.	U	V	W	X	Y
Cushion	Deep	15"	23"	<b>AS1 DPAD ( )</b>	\$357.	\$423.	\$523.	\$546.	\$579.
	Standard	15"	17"	<b>AS1 SPAD ( )</b>	279.	334.	412.	423.	445.



## Order Code

Example: **AS1 SPAD**

AS1 Pedestal

S Depth

PAD Cushion

## Specification Information

There is a \$65 upcharge on CAL133 backing on the cushion.

Consult the Knoll seating price list for leather information and grades.



## Application Notes

Pedestal cushions are for use on Currents open top mobile pedestals.

# Vertical storage cabinets

## Reuter rotating door cabinets

Currents



description	type	w	d	h	pattern no.	laminate	paint	V2 front
 Cabinet, left opening door	painted top	21"	24"	48"	<b>A2 R48 LP ( ) ( ) ( )</b>		\$2,640.	\$3,098.
		21"	24"	64"	<b>A2 R64 LP ( ) ( ) ( )</b>		2,983.	3,558.
	worksurface top, plastic laminate	21"	24"	48"	<b>A2 R48 LL ( ) ( ) ( )</b>	2,868.	n/a	n/a
	worksurface top, veneer	21"	24"	48"	<b>A2 R48 LV ( ) ( ) ( )</b>		2,983.	3,558.
 Cabinet, right opening door	painted top	21"	24"	48"	<b>A2 R48 RP ( ) ( ) ( )</b>		2,640.	3,098.
		21"	24"	64"	<b>A2 R64 RP ( ) ( ) ( )</b>		2,983.	3,558.
	worksurface top, plastic laminate	21"	24"	48"	<b>A2 R48 RL ( ) ( ) ( )</b>	2,868.	n/a	n/a
	worksurface top, veneer	21"	14"	48"	<b>A2 R48 RV ( ) ( ) ( )</b>		2,983.	3,558.
Accessories	shelf insert				<b>A1 R1 SI</b>		114.	
Replacement top	left				<b>A1 RTOPL ( ) ( )</b>	229.	288.	431.
	right				<b>A1 RTOPR ( ) ( )</b>	229.	288.	431.

Order Code	Specification Information	Application Notes
Example: <b>A2R 64 LP 117 117 117 G</b> <b>A2R</b> Reuter vertical storage <b>64</b> Height <b>L</b> Left door <b>P</b> Painted top <b>117</b> Top finish <b>117</b> Case finish <b>117</b> Front finish <b>G</b> Glides	<i>For cabinets, specify:</i> Top finish/ Case finish/ Front finish  <i>Casters/glides:</i> C Casters G Glides  <i>For replacement tops, specify:</i> <i>Top type</i> P Painted L Plastic laminate V Techgrain® veneer  <i>Specify finishes for case, front, and top.</i>  Worksurface top edges are trim grey T-mold.	Rotating door cabinets are portable enclosed freestanding storage. Cabinets feature full-height door, two file drawer frames, and a protected 4 1/2"W wardrobe area. 48"H includes one adjustable shelf, 64"H includes two shelves.  Cabinet top is painted finish. 48"H cabinet is also available with plastic laminate or veneer worksurface top. Cabinets with veneer front are available with painted or veneer top only.  Additional shelves or file drawer frame inserts may be specified separately.  Painted front cabinets may be changed from left-hand to right-hand in field but replacement top is required.  Cabinet width is designed to enable open door in 24"W footprint.

# Vertical storage cabinets

## Reuter options rotating door cabinets

Currents




description	type	w	d	h	pattern no.	laminate	paint	V2 front
	painted top	21"	24"	48"	<b>A2L 48 LP ( ) ( ) ( )</b>		\$2,271.	\$2,716.
		21"	24"	64"	<b>A2L 64 LP ( ) ( ) ( )</b>		2,606.	3,164.
	worksurface top, plastic laminate	21"	24"	48"	<b>A2L 48 LL ( ) ( ) ( )</b>	2,494.	n/a	n/a
	worksurface top, veneer	21"	24"	48"	<b>A2L 48 LV ( ) ( ) ( )</b>		2,606.	3,164.
	painted top	21"	24"	48"	<b>A2L 48 RP ( ) ( ) ( )</b>		2,271.	2,716.
		21"	24"	64"	<b>A2L 64 RP ( ) ( ) ( )</b>		2,606.	3,164.
	worksurface top, plastic laminate	21"	24"	48"	<b>A2L 48 RL ( ) ( ) ( )</b>	2,494.	n/a	n/a
	worksurface top, veneer	21"	14"	48"	<b>A2L 48 RV ( ) ( ) ( )</b>		2,606.	3,164.
Accessories	shelf insert				<b>A1 R1 SI</b>		114.	
Replacement top	left				<b>A1 RTOPL ( ) ( )</b>	229.	288.	431.
	right				<b>A1 RTOPR ( ) ( )</b>	229.	288.	431.

Order Code	Specification Information	Application Notes
Example: <b>A2L 64 LP 117 117 117 G</b> <b>A2L</b> Reuter vertical storage <b>64</b> Height <b>L</b> Left door <b>P</b> Painted top <b>117</b> Top finish <b>117</b> Case finish <b>117</b> Front finish <b>G</b> Glides	<i>For cabinets, specify:</i> Top finish/ Case finish/ Front finish  <i>Casters/glides:</i> C Casters G Glides  <i>For replacement tops, specify:</i> Top type P Painted L Plastic laminate V Techgrain® veneer  Specify painted finishes for case, front, and top.  Worksurface top edges are trim grey T-mold.	Rotating door cabinets are portable enclosed freestanding storage. Cabinets feature full-height door, two file drawer frames, and a protected 4 1/2"W wardrobe area. 48"H includes one adjustable shelf, 64"H includes two shelves.  Cabinet top is painted finish. 48"H cabinet is also available with plastic laminate or veneer worksurface top. Cabinets with veneer front are available with painted or veneer top only.  Additional shelves or file drawer frame inserts may be specified separately.  Painted front cabinets may be changed from left-hand to right-hand in field but replacement top is required.  Cabinet width is designed to enable open door in 24"W footprint.

# Worktables

*personal, tripod, wiper*

Currents

description	type	w	d	h	pattern no.	lam.	V2	V3
Personal worktable 	Adjustable	36"	28"	24-30"	<b>AT1 P36A</b> ( ) ( )	\$1,147.	\$1,343.	\$1,537.
	Fixed height	36"	28"	28"	<b>AT1 P36F</b> ( ) ( )	976.	1,171.	1,367.
Tripod worktable 	Adjustable	36"	36"	24-30"	<b>AT1 TA</b> ( ) ( )	1,406.	1,601.	1,795.
	Fixed height (low)	36"	36"	26"	<b>AT1 TL</b> ( ) ( ) ( )	976.	1,171.	1,367.
Small wiper 	Adjustable	30"	24"	24-30"	<b>AT1 W24A</b> ( ) ( ) ( )	1,550.	1,745.	1,940.
	Fixed height	30"	24"	28"	<b>AT1 W24F</b> ( ) ( ) ( )	976.	1,171.	1,367.

Order Code	Specification Information	Application Notes
Example: <b>AT1 W24F 117 117 C</b>	F Fixed height	Worktables are independent, mobile tables designed for use with desks, credenzas and panel-mounted worksurfaces.
<b>AT1</b> Table	A Adjustable height	
<b>W</b> Shape	<i>Specify top and base finish.</i>	Personal worktable is rounded rectangle shape, sized to fit within small workstations. Personal worktable has center column, four-star base for clear knee space support.
<b>24</b> Depth		
<b>F</b> Base type		Tripod is rounded triangle shape designed to roll under Currents 48" corner desks set at 28"H.
<b>117</b> Desktop finish		
<b>117</b> Base finish		Small wiper and half wiper are conference extensions for 24"D worksurfaces. Medium wiper corresponds to 30"D worksurfaces.
<b>C</b> Casters		

*Specify:*

- C Casters
- G Glides

Fixed height tables are 28"H except Tripod, 26"H. Adjustable height worktables adjust 24"-30"H in one-inch increments. Glides adjust 1 3/4". All casters are lockable. Worktable top edge is trim grey.

Wiper and half wiper tables have four legs with integral wire-manager channels.

# Worktables

*personal, tripod, wiper*

description	type	w	d	h	pattern no.	lam.	V2	V3
Medium wiper	Adjustable	30"	30-54"	24-30"	<b>AT1 W30A</b> ( ) ( )	\$1,606.	\$1,813.	\$2,020.
	Fixed height	30"	30-54"	28"	<b>AT1 W30F</b> ( ) ( )	1,033.	1,239.	1,446.



Half wiper end table	Left, adjustable	33"	24-30"	24-30"	<b>AT1 E24LA</b> ( ) ( )	1,550.	1,745.	1,940.
	Left, fixed height	33"	24-30"	28"	<b>AT1 E24LF</b> ( ) ( )	976.	1,171.	1,367.
	Right, adjustable	33"	24-30"	24-30"	<b>AT1 E24RA</b> ( ) ( )	1,550.	1,745.	1,940.
	Right, fixed height	33"	24-30"	28"	<b>AT1 E24RF</b> ( ) ( )	976.	1,171.	1,367.



*right*

Order Code	Specification Information	Application Notes
Example: <b>AT1 W24F 117 117 C</b>	F Fixed height	<p>Worktables are independent, mobile tables designed for use with desks, credenzas and panel-mounted worksurfaces.</p> <p>Personal worktable is rounded rectangle shape, sized to fit within small workstations. Personal worktable has center column, four-star base for clear knee space support.</p> <p>Tripod is rounded triangle shape designed to roll under Currents 48" corner desks set at 28"H.</p> <p>Small wiper and half wiper are conference extensions for 24"D worksurfaces. Medium wiper corresponds to 30"D worksurfaces.</p> <p>Wiper and half wiper tables have four legs with integral wire-manager channels.</p>
<b>AT1</b> Table	A Adjustable height	
<b>W</b> Shape	<i>Specify top and base finish.</i>	
<b>24</b> Depth		
<b>F</b> Base type		
<b>117</b> Desktop finish		
<b>117</b> Base finish		
<b>C</b> Casters		

*Specify:*





C Casters  
G Glides

Fixed height tables are 28"H except Tripod, 26"H. Adjustable height worktables adjust 24"-30"H in one-inch increments. Glides adjust 1 3/4". All casters are lockable. Worktable top edge is trim grey.



# Worktables

*half-round, large wiper, round*


description	type	w	d	h	pattern no.	lam.	V2	V3
Half round worktable 	Adjustable	30"	50"	24-30"	<b>AT1 D50A</b> ( ) ( )	\$1,321.	\$1,550.	\$1,779.
	Fixed height	30"	50"	28"	<b>AT1 D50F</b> ( ) ( )	1,147.	1,377.	1,606.
Large half round worktable 	Adjustable	30"	62"	24-30"	<b>AT1 D62A</b> ( ) ( )	1,721.	1,951.	2,181.
	Fixed height	30"	62"	28"	<b>AT1 D62F</b> ( ) ( )	1,147.	1,377.	1,606.
Large wiper end table 	Adjustable	33"	50-72"	24-30"	<b>AT1 W50A</b> ( ) ( )	1,721.	1,951.	2,181.
	Fixed height	33"	50-72"	28"	<b>AT1 W50F</b> ( ) ( )	1,147.	1,377.	1,606.
Round worktable 	Adjustable	42"		24-30"	<b>AT1 R42A</b> ( ) ( )	1,606.	1,813.	2,020.
	Adjustable	48"		24-30"	<b>AT1 R48A</b> ( ) ( )	1,665.	1,882.	2,101.
	Fixed height	42"		28"	<b>AT1 R42F</b> ( ) ( )	1,033.	1,239.	1,446.
	Fixed height	48"		28"	<b>AT1 R48F</b> ( ) ( )	1,090.	1,307.	1,526.

Order Code	Specification Information	Application Notes
Example: <b>AT1 D50F 117 117 C</b>	F Fixed height	<i>Specify:</i> C Casters G Glides
<b>AT1</b> Table	A Adjustable height	
<b>D</b> Shape	<i>Specify top and base finish.</i>	Fixed height tables are 28"H. Adjustable height worktables adjust 24"-30"H in one-inch increments. Glides adjust 1 3/4". Worktable top edge is trim grey.
<b>50</b> Depth		
<b>F</b> Base type		
<b>117</b> Desktop finish		
<b>117</b> Base finish		Half round worktable aligns with back-to-back 24"D Currents desks or worksurfaces plus a Currents screen or Knoll systems panel between. Large half round table aligns with back-to-back 30"D desks or worksurfaces. Large wiper is shared conference extension for back-to-back 24"D desks. All tables have center edge offset to clear panel end trim.
<b>C</b> Casters		

Large half-round, round, and wiper tables have four legs with integral wire-manager channels. Half round worktable has center column, three-star base for clear knee space support.

Desks  
pin-set adjustable  
extended left

Currents


description	w (l)	w (r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended left	60"	36"	24-30"	AD C53 SF ( ) ( )	\$1,550.	\$1,836.	\$2,124.
	60"	48"	24-30"	AD C54 SF ( ) ( )	1,665.	2,008.	2,352.
	72"	36"	24-30"	AD C63 SF ( ) ( )	1,665.	2,008.	2,352.
	72"	48"	24-30"	AD C64 SF ( ) ( )	1,779.	2,181.	2,583.
	84"	48"	24-30"	AD C74 SF ( ) ( )	1,894.	2,364.	2,839.
30"D left/24"D right corner desk, extended left	60"	48"	24-30"	AD C54 LF ( ) ( )	1,756.	2,129.	2,500.
	72"	48"	24-30"	AD C64 LF ( ) ( )	1,870.	2,300.	2,731.
	84"	48"	24-30"	AD C74 LF ( ) ( )	1,984.	2,485.	2,886.
30"D both sides corner desk, extended left	60"	48"	24-30"	AD C54 DF ( ) ( )	1,847.	2,311.	2,759.
	72"	48"	24-30"	AD C64 DF ( ) ( )	1,962.	2,450.	2,943.
	84"	48"	24-30"	AD C74 DF ( ) ( )	2,077.	2,599.	3,115.

Order Code	Specification Information	Application Notes
Example: <b>AD C64 LF 117 117 G</b>		
<b>AD</b> Desk	<i>Specify desk shape:</i> C Corner	Desks incorporate universal worksurface and adjustable C legs. Pin-set desk surface can be set at installation from 24" - 30" high, in 1" increments.
<b>C</b> Shape		
<b>6</b> Width left	<i>Width left/width right:</i> 3 36" 4 48"	Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.
<b>4</b> Width right	5 60" 6 72"	
<b>L</b> Depth (30"D left)		Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges. Clearance under worksurfaces (for pedestals, BackPack or other accessories) is 18".
<b>F</b> Base type		
<b>117</b> Desktop finish	<i>Worksurface depth:</i> S 24"D both sides L 30"D left, 24"D right R 30"D right, 24"D left D 30"D both sides	Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.
<b>117</b> Desk base finish		
<b>G</b> Glides	<i>Base type:</i> F Manually adjustable	Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.
	<i>Specify desk top and base finish.</i>	

# Desks

*pin-set adjustable  
extended right*


Currents

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended right	36"	60"	24-30"	<b>AD C35 SF</b> ( ) ( )	\$1,550.	\$1,836.	\$2,124.
	36"	72"	24-30"	<b>AD C36 SF</b> ( ) ( )	1,665.	2,008.	2,352.
	48"	60"	24-30"	<b>AD C45 SF</b> ( ) ( )	1,665.	2,008.	2,352.
	48"	72"	24-30"	<b>AD C46 SF</b> ( ) ( )	1,779.	2,181.	2,583.
	48"	84"	24-30"	<b>AD C47 SF</b> ( ) ( )	1,894.	2,364.	2,839.
30"D right/24"D left corner desk, extended right	48"	60"	24-30"	<b>AD C45 RF</b> ( ) ( )	1,756.	2,129.	2,500.
	48"	72"	24-30"	<b>AD C46 RF</b> ( ) ( )	1,870.	2,300.	2,731.
	48"	84"	24-30"	<b>AD C47 RF</b> ( ) ( )	1,984.	2,485.	2,886.
30"D both sides	48"	60"	24-30"	<b>AD C45 DF</b> ( ) ( )	1,847.	2,311.	2,759.
	48"	72"	24-30"	<b>AD C46 DF</b> ( ) ( )	1,962.	2,450.	2,943.
	48"	84"	24-30"	<b>AD C47 DF</b> ( ) ( )	2,077.	2,599.	3,115.

Order Code	Specification Information	Application Notes
Example: <b>AD C46 SF 117 117 G</b>	<i>Specify desk shape:</i>	Desks incorporate universal worksurface and adjustable C legs. Pin-set desk surface can be set at installation from 24" - 30" high, in 1" increments.  Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.  Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges. Clearance under worksurfaces (for pedestals, BackPack or other accessories) is 18".  Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.  Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left/width right:</i>	
<b>4</b> Width left	3 36"	
<b>6</b> Width right	4 48"	
<b>S</b> Depth (24" both sides)	5 60"	
<b>F</b> Base type	6 72"	
<b>117</b> Desktop finish	<i>Worksurface depth:</i>	
<b>117</b> Desk base finish	S 24"D both sides	
<b>G</b> Glides	L 30"D left, 24"D right	
	R 30"D right, 24"D left	
	D 30"D both sides	
	<i>Base type:</i>	
	F Manually adjustable	
	<i>Specify desk top and base finish.</i>	


Desks  
pin-set adjustable  
corner desk

Currents

description	w(l)	w(r)	h	pattern number	lam.	V2	V3
 24"D both sides corner desk	42"	42"	24-30"	AD C4242 SF ( ) ( )	\$1,492.	\$1,750.	\$2,008.
	48"	48"	24-30"	AD C44 SF ( ) ( )	1,550.	1,836.	2,124.
	60"	60"	24-30"	AD C55 SF ( ) ( )	1,721.	n/a	n/a
30"D left/24"D right corner desk	42"	42"	24-30"	AD C4242 LF ( ) ( )	1,527.	1,785.	2,044.
	48"	48"	24-30"	AD C44 LF ( ) ( )	1,584.	1,870.	2,157.
	60"	60"	24-30"	AD C55 LF ( ) ( )	1,756.	n/a	n/a
24"D left/30"D right corner desk	42"	42"	24-30"	AD C4242 RF ( ) ( )	1,527.	1,785.	2,044.
	48"	48"	24-30"	AD C44 RF ( ) ( )	1,584.	1,870.	2,157.
	60"	60"	24-30"	AD C55 RF ( ) ( )	1,756.	n/a	n/a
30"D both sides corner desk	42"	42"	24-30"	AD C4242 DF ( ) ( )	1,562.	1,819.	2,078.
	48"	48"	24-30"	AD C44 DF ( ) ( )	1,618.	1,904.	2,191.
	60"	60"	24-30"	AD C55 DF ( ) ( )	1,790.	n/a	n/a


Order Code	Specification Information	Application Notes
Example: <b>AD C64 LF 117 117 G</b>	<i>Specify desk shape:</i>	Desks incorporate universal worksurface and adjustable C legs. Pin-set desk surface can be set at installation from 24" - 30" high, in 1" increments.
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left/width right:</i>	Corner desks provide up to 45" diagonal depth for large monitors, keyboard and mouse. Nominal worksurface depths include 1 3/4" cable/connector space along back edge. Clearance under worksurfaces (for pedestals, Backpack or other accessories) is 18".
<b>6</b> Width left	3 36"	
<b>4</b> Width right	4 48"	Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.
<b>L</b> Depth (30"D left)	5 60"	
<b>F</b> Base type	6 72"	Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.
<b>117</b> Desktop finish	<i>Worksurface depth:</i>	
<b>117</b> Desk base finish	S 24"D both sides	
<b>G</b> Glides	L 30"D left, 24"D right	
	R 30"D right, 24"D left	
	D 30" both sides	
	<i>Base type:</i>	
	F Manually adjustable	
	<i>Specify desk top and base finish.</i>	

Desks  
*pin-set adjustable  
 straight desk*

description	w(l)	w(r)	h	pattern number	lam.	V2	V3
 24"D straight desk, curved front	36"	24"	24-30"	<b>AD S36 SF ( ) ( )</b>	\$964.	\$1,102.	\$1,239.
	42"	24"	24-30"	<b>AD S42 SF ( ) ( )</b>	988.	1,137.	1,286.
	48"	24"	24-30"	<b>AD S48 SF ( ) ( )</b>	1,009.	1,171.	1,331.
	60"	24"	24-30"	<b>AD S60 SF ( ) ( )</b>	1,056.	1,239.	1,423.
	72"	24"	24-30"	<b>AD S72 SF ( ) ( )</b>	1,102.	1,307.	1,515.
	84"	24"	24-30"	<b>AD S84 SF ( ) ( )</b>	1,147.	1,377.	1,606.
30"D straight desk, curved front	36"	30"	24-30"	<b>AD S36 DF ( ) ( )</b>	1,067.	1,222.	1,377.
	42"	30"	24-30"	<b>AD S42 DF ( ) ( )</b>	1,090.	1,188.	1,423.
	48"	30"	24-30"	<b>AD S48 DF ( ) ( )</b>	1,113.	1,292.	1,468.
	60"	30"	24-30"	<b>AD S60 DF ( ) ( )</b>	1,171.	1,377.	1,584.
	72"	30"	24-30"	<b>AD S72 DF ( ) ( )</b>	1,239.	1,481.	1,721.

Order Code	Specification Information	Application Notes
Example: <b>AD S48 DF 117 117 G</b>		
<b>AD</b> Desk	<i>Specify desk shape:</i> S Straight	<i>Specify glides/casters:</i> C Rear casters G Glides
<b>S</b> Shape		
<b>48</b> Width	<i>Width left/width right:</i>	Worksurface edges are trim grey.
<b>D</b> Depth	3 36" 4 48" 5 60" 6 72"	
<b>F</b> Base type		Desks incorporate universal worksurface and adjustable C legs. Pin-set desk surface can be set at installation from 24" - 30" high, in 1" increments.  Straight desks have slightly curved front edges, to a maximum of 1" extra depth at the center. Nominal worksurface depths include 1 3/4" cable/connector space along back edge. Clearance under worksurfaces (for pedestals, BackPack or other accessories) is 18".
<b>117</b> Desktop finish		
<b>117</b> Desk base finish	<i>Worksurface depth:</i> S 24"D both sides D 30" both sides	Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.
<b>G</b> Glides	<i>Base type:</i> F Manually adjustable	
	<i>Specify desk top and base finish.</i>	Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.


Desks  
handcrank adjustable  
extended left

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended left	60"	36"	24-34"	AD C53 SH ( ) ( )	\$2,352.	\$2,640.	\$2,927.
	60"	48"	24-34"	AD C54 SH ( ) ( )	2,467.	2,812.	3,156.
	72"	36"	24-34"	AD C63 SH ( ) ( )	2,467.	2,812.	3,156.
	72"	48"	24-34"	AD C64 SH ( ) ( )	2,583.	2,983.	3,385.
	84"	48"	24-34"	AD C74 SH ( ) ( )	2,698.	3,156.	3,615.
30"D left/24"D right corner desk, extended left	60"	48"	24-34"	AD C54 LH ( ) ( )	2,559.	2,932.	3,304.
	72"	48"	24-34"	AD C64 LH ( ) ( )	2,674.	3,104.	3,534.
	84"	48"	24-34"	AD C74 LH ( ) ( )	2,788.	3,276.	3,764.
30"D both sides corner desk, extended left	60"	48"	24-34"	AD C54 DH ( ) ( )	2,559.	2,932.	3,304.
	72"	48"	24-34"	AD C64 DH ( ) ( )	2,674.	3,104.	3,534.
	84"	48"	24-34"	AD C74 DH ( ) ( )	2,788.	3,276.	3,764.

Order Code	Specification Information	Application Notes
Example: <b>AD C53 SH 117 117 G</b>	<i>Specify desk shape:</i>	<p>Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge. Handcrank is located on the extended side of desks.</p> <p>Integral cable tray under worksurface and channels in legs provide basic lay-in wire management. Crossbeam stiffens legs through upper height range. Crossbeam is 4"H, 14" above floor.</p> <p>Desks may be specified with fixed front glides and rear casters or 1<sup>3</sup>/<sub>4</sub>" levelling glides. Casters and glides are interchangeable in the field.</p> <p>Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1<sup>3</sup>/<sub>4</sub>" cable/connector clearance along back edge.</p> <p>Handcrank mechanism is rated at 300 lbs. maximum weight.</p> <p>Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.</p>
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	S Straight	
<b>5</b> Width left	<i>Width left, width right:</i>	
<b>3</b> Width right	3 36"	
<b>S</b> Depth	4 48"	
<b>H</b> Base type	5 60"	
<b>117</b> Desktop finish	6 72"	
<b>117</b> Base finish	<i>Worksurface depth:</i>	
<b>G</b> Glides	S 24"D both sides	
	L 30"D left, 24"D right	
	R 30"D right, 24"D left	
	D 30"D both sides	
	<i>Base type:</i>	
	H Handcrank adjustable	
	<i>Specify desk top and base finish.</i>	

# Desks


*handcrank adjustable*  
*extended right*

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended right	36"	60"	24-34"	<b>AD C35 SH ( ) ( )</b>	\$2,352.	\$2,640.	\$2,927.
	36"	72"	24-34"	<b>AD C36 SH ( ) ( )</b>	2,467.	2,812.	3,156.
	48"	60"	24-34"	<b>AD C45 SH ( ) ( )</b>	2,467.	2,812.	3,156.
	48"	72"	24-34"	<b>AD C46 SH ( ) ( )</b>	2,583.	2,983.	3,385.
	48"	84"	24-34"	<b>AD C47 SH ( ) ( )</b>	2,698.	3,156.	3,615.
30"D right/24"D left corner desk, extended left	48"	60"	24-34"	<b>AD C45 RH ( ) ( )</b>	2,559.	2,932.	3,304.
	48"	72"	24-34"	<b>AD C46 RH ( ) ( )</b>	2,674.	3,104.	3,534.
	48"	84"	24-34"	<b>AD C47 RH ( ) ( )</b>	2,788.	3,276.	3,764.
30"D both sides corner desk, extended left	48"	60"	24-34"	<b>AD C45 DH ( ) ( )</b>	2,559.	2,932.	3,304.
	48"	72"	24-34"	<b>AD C46 DH ( ) ( )</b>	2,674.	3,104.	3,534.
	48"	84"	24-34"	<b>AD C47 DH ( ) ( )</b>	2,788.	3,276.	3,764.

Order Code	Specification Information	Application Notes
Example: <b>AD C35 SH 117 117 G</b>	<i>Specify desk shape:</i>	<p>Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge. Handcrank is located on the extended side of desks.</p> <p>Integral cable tray under worksurface and channels in legs provide basic lay-in wire management. Crossbeam stiffens legs through upper height range. Crossbeam is 4"H, 14" above floor.</p> <p>Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.</p> <p>Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.</p> <p>Handcrank mechanism is rated at 300 lbs. maximum weight.</p> <p>Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.</p>
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left, width right:</i>	
<b>3</b> Width left	3 36"	
<b>5</b> Width right	4 48"	
<b>S</b> Depth	5 60"	
<b>H</b> Base type	6 72"	
<b>117</b> Desktop finish	<i>Worksurface depth:</i>	
<b>117</b> Base finish	S 24"D both sides	
<b>G</b> Glides	L 30"D left, 24"D right	
	R 30"D right, 24"D left	
	D 30"D both sides	
	<i>Base type:</i>	
	H Handcrank adjustable	
	<i>Specify desk top and base finish.</i>	
	<i>Specify:</i>	
	C Rear casters	
	G Glides	
	Worksurface edges are trim grey.	

Desks  
handcrank adjustable  
corner desk

Currents

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk	42"	42"	24-34"	AD C4242 SH ( ) ( )	\$2,252.	\$2,508.	\$2,767.
	48"	48"	24-34"	AD C44 SH ( ) ( )	2,352.	2,640.	2,927.
	60"	60"	24-34"	AD C55 SH ( ) ( )	2,524.	n/a	n/a
30"D left/24"D right corner desk	42"	42"	24-34"	AD C4242 LH ( ) ( )	2,286.	2,542.	2,834.
	48"	48"	24-34"	AD C44 LH ( ) ( )	2,386.	2,674.	2,960.
	60"	60"	24-34"	AD C55 LH ( ) ( )	2,559.	n/a	n/a
24"D left/30"D right corner desk	42"	42"	24-34"	AD C4242 RH ( ) ( )	2,286.	2,542.	2,834.
	48"	48"	24-34"	AD C44 RH ( ) ( )	2,386.	2,674.	2,960.
	60"	60"	24-34"	AD C55 RH ( ) ( )	2,559.	n/a	n/a
30"D both sides corner desk	48"	48"	24-34"	AD C44 DH ( ) ( )	2,421.	2,708.	2,995.
	60"	60"	24-34"	AD C55 DH ( ) ( )	2,594.	n/a	n/a

Order Code

Example:	<b>AD C44 SH 117 117 G</b>
<b>AD</b>	Desk
<b>C</b>	Shape
<b>4</b>	Width left
<b>4</b>	Width right
<b>S</b>	Depth
<b>H</b>	Base type
<b>117</b>	Desktop finish
<b>117</b>	Base finish
<b>G</b>	Glides

Specification Information

<i>Specify desk shape:</i>		<i>Specify:</i>	
C	Corner	C	Rear casters
		G	Glides
<i>Width left, width right:</i>		Worksurface edges are trim grey.	
3	36"	Clear Maple is not available on	
4	48"	60"W x 60"D corner desks.	
5	60"		
6	72"		
<i>Worksurface depth:</i>			
S	24"D both sides		
L	30"D left, 24"D right		
R	30"D right, 24"D left		
D	30"D both sides		
<i>Base type:</i>			
H	Handcrank adjustable		
<i>Specify desk top and base finish.</i>			

Application Notes

Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge.

Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field. Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.

Corner desks provide up to 45" diagonal depth for large monitors, keyboard and mouse. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.


Handcrank mechanism is rated at 300 lbs. maximum weight.

Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.




Desks  
handcrank adjustable  
straight desk

Currents

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D straight desk, curved front	36"	24"	24-34"	<b>AD S36 SH</b> ( ) ( )	\$1,537.	\$1,675.	\$1,813.
	42"	24"	24-34"	<b>AD S42 SH</b> ( ) ( )	1,561.	1,710.	1,860.
	48"	24"	24-34"	<b>AD S48 SH</b> ( ) ( )	1,584.	1,745.	1,904.
	60"	24"	24-34"	<b>AD S60 SH</b> ( ) ( )	1,630.	1,813.	1,997.
	72"	24"	24-34"	<b>AD S72 SH</b> ( ) ( )	1,675.	1,882.	2,088.
	84"	24"	24-34"	<b>AD S84 SH</b> ( ) ( )	1,721.	1,951.	2,181.
30"D straight desk, curved front	36"	30"	24-34"	<b>AD S36 DH</b> ( ) ( )	1,641.	1,795.	1,951.
	42"	30"	24-34"	<b>AD S42 DH</b> ( ) ( )	1,665.	1,830.	1,997.
	48"	30"	24-34"	<b>AD S48 DH</b> ( ) ( )	1,686.	1,865.	2,043.
	60"	30"	24-34"	<b>AD S60 DH</b> ( ) ( )	1,745.	1,951.	2,157.
	72"	30"	24-34"	<b>AD S72 DH</b> ( ) ( )	1,813.	2,054.	2,295.

Order Code	Specification Information	Application Notes
Example: <b>AD S48 DH 117 117 G</b>	<i>Specify desk shape:</i>	<p>Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge. Hand crank may be installed on the left or right side of any straight or symmetrical corner desk.</p> <p>Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel. Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.</p> <p>Straight desks have slightly curved front edges, to a maximum of 1" extra depth at the center. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.</p> <p>Handcrank mechanism is rated at 300 lbs maximum weight.</p> <p>Desks accept clamp-on workshelves and service beams which support privacy screens, distribute power and data, and are linkable.</p>
<b>AD</b> Desk	S Straight	
<b>S</b> Shape	<i>For straight desks specify: Width:</i>	
<b>48</b> Width	36 36"	
<b>D</b> Depth	48 48"	
<b>H</b> Base type	60 60"	
<b>117</b> Desktop finish	72 72"	
<b>117</b> Base finish	<i>Worksurface depth:</i>	
<b>G</b> Glides	S 24"D D 30"D	
	<i>Base type:</i> H Handcrank adjustable	
	<i>Specify desk top and base finish.</i>	


Desks with service beam  
*pin-set adjustable*  
*extended left*

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
24"D both sides corner desk, with beam extended left 	60"	36"	24-30"	<b>AD C53 SB</b> ( ) ( )	\$2,215.	\$2,500.	\$2,788.
	60"	48"	24-30"	<b>AD C54 SB</b> ( ) ( )	2,364.	2,708.	3,052.
	72"	36"	24-30"	<b>AD C63 SB</b> ( ) ( )	2,364.	2,708.	3,052.
	72"	48"	24-30"	<b>AD C64 SB</b> ( ) ( )	2,514.	2,914.	3,317.
	84"	48"	24-30"	<b>AD C74 SB</b> ( ) ( )	2,800.	3,270.	3,746.
30"D left/24"D right corner desk, with beam extended left	60"	48"	24-30"	<b>AD C54 LB</b> ( ) ( )	2,455.	2,829.	3,201.
	72"	48"	24-30"	<b>AD C64 LB</b> ( ) ( )	2,604.	3,035.	3,465.
	84"	48"	24-30"	<b>AD C74 LB</b> ( ) ( )	2,891.	3,390.	3,791.
30"D both sides corner desk, with beam extended left	60"	48"	24-30"	<b>AD C54 DB</b> ( ) ( )	2,753.	3,218.	3,666.
	72"	48"	24-30"	<b>AD C64 DB</b> ( ) ( )	2,867.	3,355.	3,849.
	84"	48"	24-30"	<b>AD C74 DB</b> ( ) ( )	2,982.	3,505.	4,021.

Order Code	Specification Information	Application Notes
Example: <b>AD C64 SB 117 117 G</b>	<i>Specify desk shape:</i>	Desks with service beam have power distribution capability, separate lay-in wire management, and sockets for privacy screens. Pin-set worksurface can be installed at 24" - 30" high, in 1" increments.  Beam provides privacy screen support, modular power distribution, lay-in cable distribution, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.  Extended corner desks provide computer corner plus adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges.  Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel.  Corner desk beams have four openings for Knoll PDC modules. Specify power distribution components separately.  Desks accept clamp-on workshelves.
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left, width right:</i>	
<b>6</b> Width left	3 36"	
<b>4</b> Width right	4 48"	
<b>S</b> Depth	5 60"	
<b>B</b> Base type	6 72"	
<b>117</b> Desktop finish	<i>Worksurface depth:</i>	
<b>117</b> Desk base finish	S 24"D both sides	
<b>G</b> Glides	L 30"D left, 24"D right R 30"D right, 24"D left D 30"D both sides	
	<i>Base type:</i>	
	B Adjustable with beam	
	<i>Specify desk top and base finish.</i>	


Desks with service beam  
*pin-set adjustable*  
*extended right*

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
24"D both sides corner desk, with beam extended right	36"	60"	24-30"	<b>AD C35 SB ( ) ( )</b>	\$2,215.	\$2,500.	\$2,788.
	36"	72"	24-30"	<b>AD C36 SB ( ) ( )</b>	2,364.	2,708.	3,052.
	48"	60"	24-30"	<b>AD C45 SB ( ) ( )</b>	2,364.	2,708.	3,052.
	48"	72"	24-30"	<b>AD C46 SB ( ) ( )</b>	2,514.	2,914.	3,317.
	48"	84"	24-30"	<b>AD C47 SB ( ) ( )</b>	2,800.	3,270.	3,746.
30"D right/24"D left corner desk, with beam extended right	48"	60"	24-30"	<b>AD C45 RB ( ) ( )</b>	2,455.	2,829.	3,201.
	48"	72"	24-30"	<b>AD C46 RB ( ) ( )</b>	2,604.	3,035.	3,465.
	48"	84"	24-30"	<b>AD C47 RB ( ) ( )</b>	2,891.	3,390.	3,791.
30"D both sides corner desk, with beam extended right	48"	60"	24-30"	<b>AD C45 DB ( ) ( )</b>	2,753.	3,218.	3,666.
	48"	72"	24-30"	<b>AD C46 DB ( ) ( )</b>	2,867.	3,355.	3,849.
	48"	84"	24-30"	<b>AD C47 DB ( ) ( )</b>	2,982.	3,505.	4,021.



Order Code	Specification Information	Application Notes
Example: <b>AD C46 SB 117 117 G</b>	<i>Specify desk shape:</i>	Desks with service beam have power distribution capability, separate lay-in wire management, and sockets for privacy screens. Pin-set worksurface can be installed at 24" - 30" high, in 1" increments.  Beam provides privacy screen support, modular power distribution, lay-in cable distribution, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.  Extended corner desks provide computer corner plus adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges.  Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel.  Corner desk beams have four openings for Knoll PDC modules. Specify power distribution components separately.  Desks accept clamp-on workshelves.
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left, width right:</i>	
<b>4</b> Width left	3 36"	
<b>6</b> Width right	4 48"	
<b>S</b> Depth	5 60"	
<b>B</b> Base type	6 72"	
<b>117</b> Desktop finish	<i>Worksurface depth:</i>	
<b>117</b> Desk base finish	S 24"D both sides	
<b>G</b> Glides	L 30"D left, 24"D right	
	R 30"D right, 24"D left	
	D 30"D both sides	
	<i>Base type:</i>	
	B Adjustable with beam	
	<i>Specify desk top and base finish.</i>	
	<i>Specify:</i>	
	C Rear casters	
	G Glides	
	Worksurface edges are trim grey.	


Desks with service beam  
*pin-set adjustable*  
*corner desk*

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk with beam	42"	42"	24-30"	<b>AD C4242 SB</b> ( ) ( )	\$2,206.	\$2,463.	\$2,722.
	48"	48"	24-30"	<b>AD C44 SB</b> ( ) ( )	2,215.	2,500.	2,788.
	60"	60"	24-30"	<b>AD C55 SB</b> ( ) ( )	2,421.	n/a	n/a
30"D left/24"D right corner desk with beam	42"	42"	24-30"	<b>AD C4242 LB</b> ( ) ( )	2,240.	2,497.	2,756.
	48"	48"	24-30"	<b>AD C44 LB</b> ( ) ( )	2,250.	2,536.	2,823.
	60"	60"	24-30"	<b>AD C55 LB</b> ( ) ( )	2,455.	n/a	n/a
24"D left/30"D right corner desk with beam	42"	42"	24-30"	<b>AD C4242 RB</b> ( ) ( )	2,240.	2,497.	2,756.
	48"	48"	24-30"	<b>AD C44 RB</b> ( ) ( )	2,250.	2,536.	2,823.
	60"	60"	24-30"	<b>AD C55 RB</b> ( ) ( )	2,455.	n/a	n/a
30"D both sides corner desk with beam	42"	42"	24-30"	<b>AD C4242 DB</b> ( ) ( )	2,274.	2,532.	2,790.
	48"	48"	24-30"	<b>AD C44 DB</b> ( ) ( )	2,396.	2,570.	2,858.
	60"	60"	24-30"	<b>AD C55 DB</b> ( ) ( )	2,490.	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>AD C44 SB 117 117 G</b>	<i>Specify desk shape:</i>	<i>Specify:</i>
<b>AD</b> Desk	C Corner	C Rear casters
<b>C</b> Shape	<i>Width left, width right:</i>	G Glides
<b>4</b> Width left	3 36"	Worksurface edges are trim grey.
<b>4</b> Width right	4 48"	Clear Maple is not available on
<b>S</b> Depth	5 60"	60"W x 60"D corner desks.
<b>B</b> Base type	6 72"	
<b>117</b> Desktop finish	<i>Worksurface depth:</i>	Beam provides excess cord storage, continuous power and lay-in cable distribution, privacy screen support, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.
<b>117</b> Desk base finish	S 24"D both sides	Nominal worksurface depths include 1 3/4" cable/connector space at back edge.
<b>G</b> Glides	L 30"D left, 24"D right	Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel.
	R 30"D right, 24"D left	Corner desk beams have four openings for Knoll PDC modules. Specify power distribution components separately.
	D 30"D both sides	Desks accept clamp-on workshelves.
	<i>Base type:</i>	
	B Adjustable with beam	
	<i>Specify desk top and base finish.</i>	


Desks with service beam  
*pin-set adjustable*  
*straight desk*

Currents

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D straight desk, curved front	36"	24"	24-30"	<b>AD S36 SB</b> ( ) ( )	\$1,251.	\$1,387.	\$1,526.
	42"	24"	24-30"	<b>AD S42 SB</b> ( ) ( )	1,292.	1,440.	1,590.
	48"	24"	24-30"	<b>AD S48 SB</b> ( ) ( )	1,331.	1,491.	1,652.
	60"	24"	24-30"	<b>AD S60 SB</b> ( ) ( )	1,411.	1,595.	1,779.
	72"	24"	24-30"	<b>AD S72 SB</b> ( ) ( )	1,491.	1,698.	1,904.
	84"	24"	24-30"	<b>AD S84 SB</b> ( ) ( )	1,660.	1,890.	2,118.
30"D straight desk, curved front	36"	30"	24-30"	<b>AD S36 DB</b> ( ) ( )	1,353.	1,509.	1,665.
	42"	30"	24-30"	<b>AD S42 DB</b> ( ) ( )	1,395.	1,561.	1,727.
	48"	30"	24-30"	<b>AD S48 DB</b> ( ) ( )	1,435.	1,612.	1,790.
	60"	30"	24-30"	<b>AD S60 DB</b> ( ) ( )	1,526.	1,733.	1,940.
	72"	30"	24-30"	<b>AD S72 DB</b> ( ) ( )	1,630.	1,870.	2,111.


Order Code	Specification Information	Application Notes
Example: <b>AD S72 DB 117 117 G</b>	<i>Specify desk shape:</i>	<p>Desks with service beam have power distribution capability, separate lay-in wire management, and sockets for privacy screens. Pin-set worksurface can be installed at 24" - 30" high, in 1" increments.</p> <p>Beam provides excess cord storage, continuous power and lay-in cable distribution, privacy screen support, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.</p> <p>Straight desks have slightly curved front edge, to a minimum of 1" extra depth at center. Nominal worksurface depths include 1 3/4" cable/connector space at back edge.</p> <p>Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel.</p> <p>Straight desk beams have two openings for Knoll PDC modules. Specify power distribution components separately.</p> <p>Desks accept clamp-on workshelves.</p>
<b>AD</b> Desk	S Straight	
<b>S</b> Shape		
<b>72</b> Width	<i>For straight desks specify: Width:</i>	
<b>D</b> Depth	36 36	
<b>B</b> Base type	48 48"	
<b>117</b> Desktop finish	60 60"	
<b>117</b> Desk base finish	72 72"	
<b>G</b> Glides	<i>Worksurface depth:</i>	
	S 24"D	
	D 30"D	
	<i>Base type:</i>	
	B Adjustable with beam	
	<i>Specify desk top and base finish.</i>	
	<i>Specify:</i>	
	C Rear casters	
	G Glides	
	Worksurface edges are trim grey.	

Desks with service beam  
handcrank-adjustable  
extended left

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended left	60"	36"	24-34"	AD C53 SA ( ) ( )	\$3,018.	\$3,304.	\$3,592.
	60"	48"	24-34"	AD C54 SA ( ) ( )	3,167.	3,512.	3,856.
	72"	36"	24-34"	AD C63 SA ( ) ( )	3,167.	3,512.	3,856.
	72"	48"	24-34"	AD C64 SA ( ) ( )	3,317.	3,717.	4,119.
	84"	48"	24-34"	AD C74 SA ( ) ( )	3,603.	4,061.	4,521.
30"D left/24"D right corner desk, extended left	60"	48"	24-34"	AD C54 LA ( ) ( )	3,259.	3,632.	4,005.
	72"	48"	24-34"	AD C64 LA ( ) ( )	3,408.	3,838.	4,269.
	84"	48"	24-34"	AD C74 LA ( ) ( )	3,694.	4,183.	4,671.
30"D both sides corner desk, extended left	60"	48"	24-34"	AD C54 DA ( ) ( )	3,362.	3,736.	4,106.
	72"	48"	24-34"	AD C64 DA ( ) ( )	3,522.	3,952.	4,383.
	84"	48"	24-34"	AD C74 DA ( ) ( )	3,694.	4,183.	4,671.

Order Code	Specification Information	Application Notes
Example: <b>AD C64 SA 117 117 C</b>		
<b>AD</b> Desk	<i>Specify desk shape:</i> C Corner S Straight	<i>Specify:</i> C Rear casters G Glides
<b>C</b> Shape		
<b>6</b> Width left	<i>Width left, width right:</i> 4 48" 5 60" 6 72"	Worksurface edges are trim grey.
<b>4</b> Width right		
<b>S</b> Depth		
<b>A</b> Base type		Handcrank desks with service beam are mobile, adjustable desks with integral wire management, power distribution capability, and privacy screen inserts.  Handcrank adjustable desk adjusts continuously from 24-34"H with collapsible crank under front edge. Handcrank is located on the extended side of extended corner desks.  Beam provides privacy screen support, modular power distribution, lay-in cable power distribution, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.  Extended corner desks provide computer corner plus adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges.  Desks may be specified on fixed front glides and rear casters or 2 1/4" adjustable levelling glides with 1 3/4" travel.  Corner desk beams have four openings for Knoll PDC modules.  Handcrank mechanism is rated at 300 lbs. maximum weight.
<b>117</b> Desktop finish	<i>Worksurface depth:</i> S 24"D both sides D 30"D both sides L 30"D left, 24"D right R 30"D right, 24"D left	
<b>117</b> Base finish		
<b>C</b> Casters	<i>Base type:</i> A Handcrank adjustable with beam	
	<i>Specify desk top and base finish.</i>	


Desks with service beam  
handcrank-adjustable  
extended right

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D both sides corner desk, extended right	36"	60"	24-34"	AD C35 SA ( ) ( )	\$3,018.	\$3,304.	\$3,592.
	36"	72"	24-34"	AD C36 SA ( ) ( )	3,167.	3,512.	3,856.
	48"	60"	24-34"	AD C45 SA ( ) ( )	3,167.	3,512.	3,856.
	48"	72"	24-34"	AD C46 SA ( ) ( )	3,317.	3,717.	4,119.
	48"	84"	24-34"	AD C47 SA ( ) ( )	3,603.	4,061.	4,521.
30"D right/24"D left corner desk, extended right	48"	60"	24-34"	AD C45 RA ( ) ( )	3,259.	3,632.	4,005.
	48"	72"	24-34"	AD C46 RA ( ) ( )	3,408.	3,838.	4,269.
	48"	84"	24-34"	AD C47 RA ( ) ( )	3,694.	4,183.	4,671.
30"D both sides corner desk, extended right	48"	60"	24-34"	AD C45 DA ( ) ( )	3,362.	3,736.	4,106.
	48"	72"	24-34"	AD C46 DA ( ) ( )	3,522.	3,952.	4,383.
	48"	84"	24-34"	AD C47 DA ( ) ( )	3,694.	4,183.	4,671.

Order Code	Specification Information	Application Notes
Example: <b>AD C46 SA 117 117 C</b>	<i>Specify desk shape:</i>	<i>Specify:</i>
<b>AD</b> Desk	C Corner	C Rear casters
<b>C</b> Shape	S Straight	G Glides
<b>4</b> Width left	<i>Width left, width right:</i>	Worksurface edges are trim grey.
<b>6</b> Width right	4 48"	
<b>S</b> Depth	5 60"	Handcrank adjustable desk adjusts continuously from 24-34"H with collapsible crank under front edge. Handcrank is located on the extended side of extended corner desks.
<b>A</b> Base type	6 72"	Handcrank adjustable desk adjusts continuously from 24-34"H with collapsible crank under front edge. Handcrank is located on the extended side of extended corner desks.
<b>117</b> Desktop finish	<i>Worksurface depth:</i>	Beam provides privacy screen support, modular power distribution, lay-in cable power distribution, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.
<b>117</b> Base finish	S 24"D both sides	
<b>C</b> Casters	D 30"D both sides	Extended corner desks provide computer corner plus adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges.
	L 30"D left, 24"D right	Desks may be specified on fixed front glides and rear casters or 2 1/4" adjustable levelling glides with 1 3/4" travel.
	R 30"D right, 24"D left	Corner desk beams have four openings for Knoll PDC modules.
	<i>Base type:</i>	Handcrank mechanism is rated at 300 lbs. maximum weight.
	A Handcrank adjustable with beam	
	<i>Specify desk top and base finish.</i>	

Desks with service beam  
handcrank-adjustable  
corner desk


Currents

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
24"D both sides corner desk 	42"	42"	24-34"	AD C4242 SA ( ) ( )	\$3,009.	\$3,244.	\$3,525.
	48"	48"	24-34"	AD C44 SA ( ) ( )	3,018.	3,304.	3,592.
	60"	60"	24-34"	AD C55 SA ( ) ( )	3,224.	n/a	n/a
30"D left/24"D right corner desk	42"	42"	24-34"	AD C4242 LA ( ) ( )	3,044.	3,301.	3,560.
	48"	48"	24-34"	AD C44 LA ( ) ( )	3,052.	3,338.	3,626.
	60"	60"	24-34"	AD C55 LA ( ) ( )	3,259.	n/a	n/a
24"D left/30"D right corner desk	42"	42"	24-34"	AD C4242 RA ( ) ( )	3,044.	3,301.	3,560.
	48"	48"	24-34"	AD C44 RA ( ) ( )	3,052.	3,338.	3,626.
	60"	60"	24-34"	AD C55 RA ( ) ( )	3,259.	n/a	n/a
30"D both side corner desk	48"	48"	24-34"	AD C44 DA ( ) ( )	3,087.	3,374.	3,661.
	60"	60"	24-34"	AD C55 DA ( ) ( )	3,294.	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>AD C44 SA 117 117 C</b>	<i>Specify desk shape:</i>	<p>Casters/no casters:</p> <p>C Rear casters G Glides</p> <p>Worksurface edges are trim grey. Clear Maple is not available on 60"W x 60"D corner desks.</p> <p>Handcrank desks with service beam are mobile, adjustable desks with integral wire management, power distribution capability, and privacy screen inserts.</p> <p>Handcrank adjustable base adjusts continuously from 24-34"H with collapsible crank under front edge.</p> <p>Beam provides excess cord storage, continuous power and lay-in cable distribution, privacy screen support, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.</p> <p>Nominal worksurface depths include 1 3/4" cable/connector space at back edge.</p> <p>Desks may be specified on fixed front glides and rear casters or 2 1/4" adjustable levelling glides with 1 3/4" travel.</p> <p>Corner desk beams have four openings for Knoll PDC modules.</p> <p>Handcrank mechanism is rated at 300 lbs. maximum weight.</p>
<b>AD</b> Desk	C Corner	
<b>C</b> Shape	<i>Width left, width right:</i>	
<b>4</b> Width left	4 48"	
<b>4</b> Width right	5 60"	
<b>S</b> Depth	6 72"	
<b>A</b> Base type	<i>Worksurface depth:</i>	
<b>117</b> Desktop finish	S 24"D both sides	
<b>117</b> Base finish	D 30"D both sides	
<b>C</b> Casters	L 30"D left, 24"D right R 30"D right, 24"D left	
	<i>Base type:</i>	
	A Handcrank adjustable with beam	
	<i>Specify handcrank left or right side of desk:</i>	
	L left R right	
	<i>Specify desk top and base finish.</i>	



Desks with service beam  
handcrank-adjustable  
straight desk

description	w(l)	w(r)	h	pattern no.	lam.	V2	V3
 24"D straight desk, curved front	36"	24"	24-34"	<b>AD S36 SA</b> ( ) ( )	\$1,824.	\$1,962.	\$2,101.
	42"	24"	24-34"	<b>AD S42 SA</b> ( ) ( )	1,865.	2,013.	2,163.
	48"	24"	24-34"	<b>AD S48 SA</b> ( ) ( )	1,904.	2,065.	2,226.
	60"	24"	24-34"	<b>AD S60 SA</b> ( ) ( )	1,984.	2,168.	2,352.
	72"	24"	24-34"	<b>AD S72 SA</b> ( ) ( )	2,065.	2,226.	2,479.
	84"	24"	24-34"	<b>AD S84 SA</b> ( ) ( )	2,234.	2,463.	2,694.
30"D straight desk, curved front	36"	30"	24-34"	<b>AD S36 DA</b> ( ) ( )	1,927.	2,082.	2,238.
	42"	30"	24-34"	<b>AD S42 DA</b> ( ) ( )	1,968.	2,134.	2,300.
	48"	30"	24-34"	<b>AD S48 DA</b> ( ) ( )	2,008.	2,186.	2,364.
	60"	30"	24-34"	<b>AD S60 DA</b> ( ) ( )	2,101.	2,306.	2,514.
	72"	30"	24-34"	<b>AD S72 DA</b> ( ) ( )	2,203.	2,444.	2,684.

**Order Code**

Example: <b>AD S60 SA 117 117 C</b>
<b>AD</b> Desk
<b>S</b> Shape
<b>60</b> Width
<b>S</b> Depth
<b>A</b> Base type
<b>117</b> Desktop finish
<b>117</b> Base finish
<b>C</b> Casters

**Specification Information**

*Specify desk shape:*  
S Straight

*For straight desks specify: Width:*  
36 36"  
48 48"  
60 60"  
72 72"

*Worksurface depth:*  
S 24"D  
D 30"D

*Base type:*  
A Handcrank adjustable with beam

*Specify desk top and base finish.*

*Casters/no casters:*  
C Rear casters  
G Glides

Worksurface edges are trim grey.

**Application Notes**

Handcrank desks with service beam are mobile, adjustable desks with integral wire management, power distribution capability, and privacy screen inserts.

Handcrank adjustable base adjusts continuously from 24-34"H with collapsible crank under front edge. Handcrank may be installed on the left or right side of any straight or symmetrical corner desk.

Beam provides excess cord storage, continuous power and lay-in cable distribution, privacy screen support, and modesty to 14" above floor level. Service beams can be linked for continuous power/data distribution through adjacent desks and credenzas with service beams.

Straight desks have slightly curved front edge, to a minimum of 1" extra depth at center. Nominal worksurface depths include 1 3/4" cable/connector space at back edge.

Desks may be specified on fixed front glides and rear casters or 2 1/4" adjustable levelling glides with 1 3/4" travel.

Straight desk beams have two openings for Knoll PDC modules.

Handcrank mechanism is rated at 300 lbs. maximum weight.

# Basic credenzas

## *laminate top*

Currents

description	type	w	d	h	pattern no.	lam./P1	lam./P2	lam./P3
Basic credenza with laminate top two file drawers	casters	24"	24"	28"	<b>AC 24 C 2 C ( ) ( )</b>	\$1,660.	\$1,705.	\$1,790.
	casters	30"	24"	28"	<b>AC 30 C 2 C ( ) ( )</b>	1,827.	1,883.	1,977.
	glides	24"	24"	28"	<b>AC 24 C 2 G ( ) ( )</b>	1,604.	1,648.	1,732.
	glides	30"	24"	28"	<b>AC 30 C 2 G ( ) ( )</b>	1,783.	1,827.	1,919.



### Order Code

Example:	<b>AC 30 C2C 117 117 117</b>
<b>AC</b>	Currents credenza
<b>30</b>	Width
<b>C</b>	Basic credenza
<b>2</b>	2 drawer
<b>C</b>	Caster
<b>117</b>	Top finish
<b>117</b>	Case finish
<b>117</b>	Front finish

### Specification Information

*Specify finish for top, case and front.*

### Application Notes

Basic credenzas are freestanding storage assemblies with or without top, 24" or 30" wide.

They may be specified on casters or glides.


All units accept clamp-on workshelf.


Grommeted openings on back and at the bottom allow cable feeds.

# Basic credenzas

*veneer top*

Currents

description	type	w	d	h	pattern no.	P1 front	P2 front	P3 front	V2 front	V3 front
	casters	24"	24"	28"	<b>AC 24 C 2 C ( ) ( )</b>	\$1,772.	\$1,816.	\$1,907.	\$2,094.	n/a
		30"	24"	28"	<b>AC 30 C 2 C ( ) ( )</b>	1,939.	1,995.	2,094.	2,295.	n/a
	glides	24"	24"	28"	<b>AC 24 C 2 G ( ) ( )</b>	1,715.	1,760.	1,848.	2,028.	n/a
		30"	24"	28"	<b>AC 30 C 2 G ( ) ( )</b>	1,894.	1,939.	2,035.	2,239.	n/a

	casters	24"	24"	28"	<b>AC 24 C 2 C ( ) ( )</b>	1,883.	1,927.	2,024.	n/a	2,417.
		30"	24"	28"	<b>AC 30 C 2 C ( ) ( )</b>	1,939.	2,106.	2,211.	n/a	2,641.
	glides	24"	24"	28"	<b>AC 24 C 2 G ( ) ( )</b>	1,827.	1,871.	1,966.	n/a	2,340.
		30"	24"	28"	<b>AC 30 C 2 G ( ) ( )</b>	1,894.	2,050.	2,153.	n/a	2,563.

## Order Code

Example:	<b>AC 30 C2C 4 117 117</b>
<b>AC</b>	Currents credenza
<b>C</b>	Basic credenza
<b>2</b>	2 file drawers
<b>C</b>	Casters
<b>4</b>	Top finish
<b>117</b>	Case finish
<b>117</b>	Fronts finish

## Specification Information

*Specify Credenza top, case and front finish.*

## Application Notes

Basic credenzas are freestanding storage assemblies, 24" or 30" wide.

The may be specified on casters or glides.


All units accept clamp-on workshelf.

Grommeted opening on back and at the bottom allow cable feeds.

# Basic credenzas

## *open top*

Currents

description	type	w	d	h	pattern no.	P1 front	P2 front	P3 front	V2 front	V3 front
	casters	24"	24"	28"	<b>AC 24 C 2 C N ( ) ( )</b>	\$1,549.	\$1,593.	\$1,673.	\$1,871.	\$2,417.
		30"	24"	28"	<b>AC 30 C 2 C N ( ) ( )</b>	1,715.	1,772.	1,861.	2,073.	2,641.
	glides	24"	24"	28"	<b>AC 24 C 2 G N ( ) ( )</b>	1,492.	1,537.	1,614.	1,805.	2,340.
		30"	24"	28"	<b>AC 30 C 2 G N ( ) ( )</b>	1,671.	1,715.	1,802.	2,017.	2,563.

### Order Code

Example:	<b>AC 30 C2C N 117 117</b>
<b>AC</b>	Currents credenza
<b>C</b>	Basic credenza
<b>2</b>	2 file drawers
<b>C</b>	Casters
<b>N</b>	Open top
<b>117</b>	Case finish
<b>117</b>	Fronts finish

### Specification Information

*Specify Credenza case and front finish.*

### Application Notes

Basic credenzas are freestanding storage assemblies, 24" or 30" wide.

The may be specified on casters or glides.




All units accept clamp-on workshelf.

Grommeted opening on back and at the bottom allow cable feeds.

# Credenzas

*laminated top*

Currents

description	width	depth	height	pattern number	L/P1	L/P2
Box/data/file/two file combination 	36"	24"	28"	<b>AC 3B 32</b> ( ) ( ) ( ) ( )	\$2,856.	\$2,941.
	48"	24"	28"	<b>AC 4B 32</b> ( ) ( ) ( ) ( )	3,213.	3,308.
Two files/box/data/file combination	36"	24"	28"	<b>AC 3B 23</b> ( ) ( ) ( ) ( )	2,856.	2,941.
	48"	24"	28"	<b>AC 4B 23</b> ( ) ( ) ( ) ( )	3,213.	3,308.
All file drawers 	36"	24"	28"	<b>AC 3B 22</b> ( ) ( ) ( ) ( )	2,618.	2,697.
	48"	24"	28"	<b>AC 4B 22</b> ( ) ( ) ( ) ( )	2,974.	3,064.
Enclosed shelves 	36"	24"	28"	<b>AC 3B 11</b> ( ) ( ) ( ) ( )	2,023.	2,083.
	48"	24"	28"	<b>AC 4B 11</b> ( ) ( ) ( ) ( )	2,261.	2,329.

Order Code	Specification Information	Application Notes
Example: <b>AC 3B 23 S 117 117 117 C</b>	<i>Credenza configuration left, right:</i>	<i>Casters/no casters:</i>
<b>AC</b> Credenza	0 Open shelf 18"W	C Casters
<b>3</b> Width	1 Door cabinet 18"W/24"W	G Glides
<b>B</b> Basic	2 2 file pedestal 18"/24"W	
<b>23</b> Configuration	3 personal/data/file 18"W	
<b>S</b> Stanchions	<i>Specify:</i>	
<b>117</b> Credenza top finish	S Stanchions for Reuter overhead storage	Credenzas are freestanding storage assemblies with top and overhead storage capability.
<b>117</b> Credenza case finish	N No stanchions	Credenzas on this page have four 18"W or 24"W lateral file drawers or enclosed shelves.
<b>117</b> Fronts finish	<i>Specify laminate top, case and front finish.</i>	Credenza top slides forward to access 4"D cable feed/storage area inside case at rear. Grommeted openings on back and at the bottom allow power and cable feeds. Cable coil kit fits in cable storage area.
<b>C</b> Casters		Top may be specified "S" for corner cutouts to accept stanchions for Reuter overhead storage (specified separately). All credenzas support workshelf.

Credenzas also accept service beams which support privacy screens, distribute power and data, and are linkable.

Credenzas may be specified on locking casters or glides with 1 3/4" travel.

# Credenzas

*veneer top*

Currents

description	width	depth	height	pattern number	V2/P1	V2/P2	V3/P2	V2/V2	V3/V3
Box/data/file/two file combination	36"	24"	28"	<b>AC 3B 32</b> ( ) ( ) ( ) ( )	\$2,981.	\$3,070.	\$3,198.	\$3,608.	\$4,007.
	48"	24"	28"	<b>AC 4B 32</b> ( ) ( ) ( ) ( )	3,361.	3,462.	3,616.	4,050.	4,497.




Two files/box/data/file combination	36"	24"	28"	<b>AC 3B 23</b> ( ) ( ) ( ) ( )	2,981.	3,070.	3,198.	3,608.	4,007.
	48"	24"	28"	<b>AC 4B 23</b> ( ) ( ) ( ) ( )	3,361.	3,462.	3,616.	4,050.	4,497.

All file drawers	36"	24"	28"	<b>AC 3B 22</b> ( ) ( ) ( ) ( )	2,742.	2,824.	2,953.	3,340.	3,725.
	48"	24"	28"	<b>AC 4B 22</b> ( ) ( ) ( ) ( )	3,124.	3,217.	3,371.	3,708.	4,215.



Enclosed shelves	36"	24"	28"	<b>AC 3B 11</b> ( ) ( ) ( ) ( )	2,148.	2,212.	2,341.	2,628.	2,966.
	48"	24"	28"	<b>AC 4B 11</b> ( ) ( ) ( ) ( )	2,410.	2,482.	2,635.	2,947.	3,333.




Order Code	Specification Information	Application Notes
Example: <b>AC 3B 23 S 8 117 C C</b>	<i>Credenza configuration left, right:</i>	<i>Casters/no casters:</i>
<b>AC</b> Credenza	0 Open shelf 18"W	C Casters
<b>3</b> Width	1 Door cabinet 18"W/24"W	G Glides
<b>B</b> Basic	2 2 file pedestal 18"/24"W	
<b>23</b> Configuration	3 personal/data/file 18"W	
<b>S</b> Stanchions	S Stanchions for Reuter overhead storage	Credenzas are freestanding storage assemblies with top and overhead storage capability.
<b>8</b> Credenza top finish	N No stanchions	Credenzas on this page have four 18"W or 24"W lateral file drawers or enclosed shelves.
<b>117</b> Credenza case finish	<i>Specify top, case and front finish.</i>	Credenza top slides forward to access 4"D cable feed/storage area inside case at rear. Grommeted openings on back and at the bottom allow power and cable feeds. Cable coil kit fits in cable storage area.
<b>C</b> Fronts finish		Top may be specified "S" for corner cutouts to accept stanchions for Reuter overhead storage (specified separately). All credenzas support workshelf.
<b>C</b> Casters		Credenzas also accept service beams which support privacy screens, distribute power and data, and are linkable.

Credenzas may be specified on locking casters or glides with 1 3/4" travel.


# Credenzas with service beam laminated top

Currents


description	width	depth	height	pattern number	L/P1	L/P2
Box/data/file/2 files combination	36"	24"	28"	<b>AC 3A 32</b> ( ) ( ) ( ) ( )	\$3,117.	\$3,212.
	48"	24"	28"	<b>AC 4A 32</b> ( ) ( ) ( ) ( )	3,521.	3,628.
Two files/box/data/file combination	36"	24"	28"	<b>AC 3A 23</b> ( ) ( ) ( ) ( )	3,117.	3,212.
	48"	24"	28"	<b>AC 4A 23</b> ( ) ( ) ( ) ( )	3,521.	3,628.



All file drawers	width	depth	height	pattern number	L/P1	L/P2
	36"	24"	28"	<b>AC 3A 22</b> ( ) ( ) ( ) ( )	2,879.	2,966.
	48"	24"	28"	<b>AC 4A 22</b> ( ) ( ) ( ) ( )	3,283.	3,382.



Enclosed shelves	width	depth	height	pattern number	L/P1	L/P2
	36"	24"	28"	<b>AC 3A 11</b> ( ) ( ) ( ) ( )	2,284.	2,354.
	48"	24"	28"	<b>AC 4A 11</b> ( ) ( ) ( ) ( )	2,570.	2,648.




Order Code	Specification Information	Application Notes
Example: <b>AC 3A 32N 117 117 117</b> <b>G</b>	<i>Credenza configuration left, right:</i> 0 Open shelf 18"W 1 Door cabinet 18"W/24"W 2 2 file pedestal 18"/24"W 3 personal/data/file 18"W S Stanchions for Reuter overhead storage N No stanchions  <i>Specify top, cae and front finish.</i>	<i>Casters/no casters:</i> C Casters G Glides
<b>AC</b> Credenza		Credenzas with service beam are freestanding storage assemblies with top, integral wire management, privacy screen inserts and overhead storage capability.
<b>3</b> Width		Credenzas on this page combine 18"W personal/data/file drawers and 18"W or 30"W lateral file drawers. Configurations may be reversed left/right in field.
<b>A</b> Service beam		Credenza top slides forward to access 4"D cable feed/storage area inside case at rear. Grommeted openings on back and at the bottom allow power and cable feeds. Cable coil kit fits in cable storage area.
<b>3</b> Configuration left		Credenza wireway beam may be linked to adjacent desk or credenza beams for continuous lay-in cable.
<b>2</b> Configuration right		All credenzas accept clamp-on workshelf.
<b>N</b> No stanchions		Top may be specified "S" for corner cutouts to accept stanchions for Reuter overhead storage (specified separately). All credenzas support workshelf.
<b>117</b> Credenza top finish		Credenzas may be specified on locking casters or glides with 1 3/4" travel.
<b>117</b> Credenza case finish		
<b>117</b> Fronts finish		
<b>G</b> Glides		


# Credenzas with service beam veneer top

Currents


description	type	width	depth	height	pattern number	V2/P1	V2/P2	V3/P1	V3/P2	V2/V2	V3/V3
Box/data/file/2 files combination		36"	24"	28"	<b>AC 3A 32</b> ( ) ( ) ( ) ( )	\$3,243.	\$3,340.	\$3,390.	\$3,468.	\$3,878.	\$4,278.
		48"	24"	28"	<b>AC 4A 32</b> ( ) ( ) ( ) ( )	3,671.	3,781.	3,819.	3,933.	4,369.	4,816.
Two files/box/data/file combination		36"	24"	28"	<b>AC 3A 23</b> ( ) ( ) ( ) ( )	3,243.	3,340.	3,390.	3,468.	3,878.	4,278.
		48"	24"	28"	<b>AC 4A 23</b> ( ) ( ) ( ) ( )	3,671.	3,781.	3,819.	3,933.	4,369.	4,816.



All file drawers		36"	24"	28"	<b>AC 3A 22</b> ( ) ( ) ( ) ( )	3,005.	3,094.	3,129.	3,223.	3,608.	3,996.
		48"	24"	28"	<b>AC 4A 22</b> ( ) ( ) ( ) ( )	3,433.	3,536.	3,581.	3,688.	4,026.	4,534.



Enclosed shelves		36"	24"	28"	<b>AC 3A 11</b> ( ) ( ) ( ) ( )	2,410.	2,482.	2,534.	2,610.	2,898.	3,235.
		48"	24"	28"	<b>AC 4A 11</b> ( ) ( ) ( ) ( )	2,720.	2,801.	2,867.	2,953.	3,267.	3,651.



Order Code	Specification Information	Application Notes
Example: <b>AC 3A 32N 8 117 C G</b>	<i>Credenza configuration left, right:</i>	
<b>AC</b> Credenza	0 Open shelf 18"W	<i>Casters/no casters:</i>
<b>3</b> Width	1 Door cabinet 18"W/24"W	C Casters
<b>A</b> Service beam	2 2 file pedestal 18"/24"W	G Glides
<b>3</b> Configuration left	3 personal/data/file 18"W	
<b>2</b> Configuration right	S Stanchions for Reuter overhead storage	Credenzas with service beam are freestanding storage assemblies with top, integral wire management, privacy screen inserts and overhead storage capability.
<b>N</b> No stanchions	N No stanchions	Credenzas on this page combine 18"W personal/data/file drawers and 18"W or 30"W lateral file drawers. Configurations may be reversed left/right in field.
<b>8</b> Credenza top finish	<i>Specify top, case and front finish.</i>	Credenza top slides forward to access 4"D cable feed/storage area inside case at rear. Grommets openings on back and at the bottom allow power and cable feeds. Cable coil kit fits in cable storage area.
<b>117</b> Credenza case finish		Credenza wireway beam may be linked to adjacent desk or credenza beams for continuous lay-in cable.
<b>C</b> Fronts finish		All credenzas accept clamp-on workshelf.
<b>G</b> Glides		Top may be specified "S" for corner cutouts to accept stanchions for Reuter overhead storage (specified separately). All credenzas support workshelf.

Credenzas may be specified on locking casters or glides with 1 3/4" travel.



description	w	d	h	pattern no.	paint
Service beam, straight desk	36"	–	9"	AA1RW36( )	\$321.
	42"	–	9"	AA1RW42( )	344.
	48"	–	9"	AA1RW48( )	368.
	60"	–	9"	AA1RW60( )	413.
	72"	–	9"	AA1RW72( )	459.
	84"	–	9"	AA1RW84( )	513.
Service beam set for corner desk	36"	60"	9"	AA1RWC35( )	757.
	36"	72"	9"	AA1RWC36( )	804.
	42"	42"	9"	AA1RWC4242( )	712.
	48"	48"	9"	AA1RWC44( )	757.
	48"	60"	9"	AA1RWC45( )	804.
	48"	72"	9"	AA1RWC46( )	849.
	48"	84"	9"	AA1RWC47( )	905.
	60"	36"	9"	AA1RWC53( )	757.
	60"	48"	9"	AA1RWC54( )	804.
	60"	60"	9"	AA1RWC55( )	849.
	72"	36"	9"	AA1RWC63( )	804.
	72"	48"	9"	AA1RWC64( )	849.
	84"	48"	9"	AA1RWC74( )	905.
Service beam, one side of corner desk (left)	36"	–	9"	AA1RWL36( )	344.
	42"	–	9"	AA1RWL42( )	368.
	48"	–	9"	AA1RWL48( )	390.
	60"	–	9"	AA1RWL60( )	436.
	72"	–	9"	AA1RWL72( )	483.
	84"	–	9"	AA1RWL84( )	529.
Service beam, one side of corner desk (right)	36"	–	9"	AA1RWR36( )	344.
	42"	–	9"	AA1RWR42( )	368.
	48"	–	9"	AA1RWR48( )	390.
	60"	–	9"	AA1RWR60( )	436.
	72"	–	9"	AA1RWR72( )	483.
	84"	–	9"	AA1RWR84( )	529.

**Order Code**

Example: <b>AA1 RW48 117</b>
<b>AA1</b> Desk accessory
<b>R</b> Replacement
<b>W</b> Wireway
<b>48</b> Width
<b>117</b> Finish

**Specification Information**

For corner service beam sets “w” column indicates width of left side, “d” column indicates width of right side of desk.  
*Specify paint finish for service beams.*

**Application Notes**

Service beams fit on to desks or credenzas to provide lay-in wire management, power and data network distribution, and modesty to 14" above floor. Service beams do not attach to fixed height C-legs.

Straight service beams are applicable on corresponding width straight C-leg desks.

Service beam corner sets include corner connector for continuous wireway under corner desks.

Service beams for one side of corner desk may be specified when other side is planned along service wall.

Retracting doors in end caps and corners allow lay-in cabling and power jumpers from desk-to-desk. Each beam has two openings for Knoll PDC modules (page ); corner desk sets have four openings.

Ballast plate is required when adding service beam to 60" x 24" or 72" x 24" handcrank desk. Ballast plate attaches under worksurface.

description	w	d	h	pattern no.	paint
Replacement service beam corner	4"	4"	9"	<b>AA1RWC( )</b>	\$114.
Credenza service beam	36"	3"	9"	<b>AA1RW3C( )</b>	253.
	48"	3"	9"	<b>AA1RW4C( )</b>	298.
Ballast plate for handcrank desks				<b>AA1BP6</b>	40.

**Order Code**

Example: <b>AA1 RW48 117</b>
<b>AA1</b> Desk accessory
<b>R</b> Replacement
<b>W</b> Wireway
<b>48</b> Width
<b>117</b> Finish

**Specification Information**

For corner service beam sets “w” column indicates width of left side, “d” column indicates width of right side of desk.  
*Specify paint finish for service beams.*

**Application Notes**

Service beams fit on to desks or credenzas to provide lay-in wire management, power and data network distribution, and modesty to 14" above floor. Service beams do not attach to fixed height C-legs.

Straight service beams are applicable on corresponding width straight C-leg desks.


Service beam corner sets include corner connector for continuous wireway under corner desks.

Service beams for one side of corner desk may be specified when other side is planned along service wall.

Retracting doors in end caps and corners allow lay-in cabling and power jumpers from desk-to-desk. Each beam has two openings for Knoll PDC modules (page ); corner desk sets have four openings.

Ballast plate is required when adding service beam to 60" x 24" or 72" x 24" handcrank desk. Ballast plate attaches under worksurface.

# Above-desk storage for desks and credenzas

description	w	d	h	pattern no.	paint
	21"	13"	6"	<b>AA1WS24( )</b>	\$413.
	27"	13"	6"	<b>AA1WS30( )</b>	436.
	33"	13"	6"	<b>AA1WS36( )</b>	459.
	45"	13"	6"	<b>AA1WS48( )</b>	493.
Workshelf dividers (set of 5)				<b>AA1WSD( )</b>	114.
High efficiency workshelf light	18"	6"	2"	<b>AA1WST18</b>	258.
	24"	6"	2"	<b>AA1WST24</b>	293.
	36"	6"	2"	<b>AA1WST36</b>	315.
Workshelf task light	18"	6"	2"	<b>AA1WSF18</b>	140.
	24"	6"	2"	<b>AA1WSF24</b>	177.
	36"	6"	2"	<b>AA1WSF36</b>	198.
Workshelf light with electronic ballast	18"	6"	2"	<b>AA1WSTE18</b>	292.
	24"	6"	2"	<b>AA1WSTE24</b>	328.
	36"	6"	2"	<b>AA1WSTE36</b>	349.

Order Code	Specification Information	Application Notes
Example: <b>AA1 WS24 117</b>		
<b>AA1</b> Accessory	<p><i>Specify painted finishes for workshelf and dividers. Workshelf lights are dark grey painted finish. For workshelf lights in City of Chicago installations add suffix (CH) and add \$46. For City of New York add (NY) with no upcharge.</i></p>	<p>Workshelf mounts anywhere along back of desk or credenza, independent of privacy screens. Workshelf includes uprights and clamps for Currents, Equity, or Morrison 1 1/4" worksurfaces.</p> <p>Workshelf light provides fill light under a workshelf. Specify 18"W light for 24" or 30" shelf, 24" light for 36" shelf, 36" light for 48" shelf.</p> <p>Task light has T12 warm white fluorescent lamp.</p> <p>High efficiency light and light with electronic ballast utilize T8 lamp. Electronic ballast should be specified if adjacent to computer video display.</p>
<b>WS</b> Workshelf		
<b>24</b> Width		
<b>117</b> Finish		

# Desk and credenza accessories

## *stanchions, file supports and data tray cover*

Currents

description	type	w	d	h	pattern no.	black	paint
Credenza stanchions	outlets cover for stanchions to 39"				<b>AA1RSOC11( )</b>		\$58.
	outlets cover for stanchions to 48"				<b>AA1RSOC20( )</b>		58.
	stanchions to 39"H	4"	9"	11"	<b>AA1RS11( )</b>		505.
	stanchions to 48"H	4"	9"	20"	<b>AA1RS20( )</b>		573.
Data tray cover set, desk or credenza		36"			<b>AA1DT36( )</b>		70.
		42"			<b>AA1DT42( )</b>		75.
		48"			<b>AA1DT48( )</b>		80.
		60"			<b>AA1DT60( )</b>		85.
		72"			<b>AA1DT72( )</b>		90.
		84"			<b>AA1DT84( )</b>		98.
File supports		18"	-	-	<b>AC1 FS18</b>	34.	
		24"	-	-	<b>AC1 FS24</b>	34.	
		30"	-	-	<b>AC1 FS30</b>	34.	
Outlet fillers (Set of 10)				<b>AR OF</b>	26.		

Order Code	Specification Information	Application Notes
Example: <b>AA1 DT36 117</b>	<i>Specify painted finish for data tray cover set, desk, or credenza.</i>	Credenza stanchions mount Reuter shelf or overhead to credenza of the same width. Specify credenza with stanchion cutouts, and storage on pages -. Stanchion cutouts allow credenza top to be pulled forward for access to cable storage in beam.
<b>AA1</b> Accessory		
<b>DT</b> Data tray cover set		
<b>36</b> Width		
<b>117</b> Finish		
		Metal data tray covers set into top of service beam to protect data network cables.
		Data tray cover sets fit straight desk beam or one side of corresponding width corner desk.
		Basic credenzas are compact, freestanding storage assemblies components with top and overhead storage capability. Basic credenzas include two full width file drawers.
		Top of Reuter overhead on stanchions to 48"H is at 63". Top of overhead on stanchions to 39"H is at 54".
		Outlets cover for stanchions has openings for two duplex power outlets and two PDC modules. Specify outlets filler for unused openings.

Power components for desks and credenzas  
**2 + 2 Raceway**  
*outlet module, linking bracket, jumper cable*

description	type	w	pattern no.	paint
Outlet module for desk service beam	2 outlets	12"	<b>AR1 DEM2 ( )</b>	\$208.
	4 outlets	24"	<b>AR1 DEM4 ( )</b>	278.
Desk-to-desk/credenza linking bracket			<b>AA1DD( )</b>	40.
Desk to wall linking bracket			<b>AA1DW( )</b>	139.
Jumper cable	12" wall/36" desk	37"	<b>AR1 EJ1</b>	70.
	24" wall/48" desk	49"	<b>AR1 EJ2</b>	92.
	36" wall/60" desk	61"	<b>AR1 EJ3</b>	105.
	48" wall/84" desk	73"	<b>AR1 EJ4</b>	115.
	60" wall/84" desk	85"	<b>AR1 EJ5</b>	128.
	72" wall/96" desk	97"	<b>AR1 EJ6</b>	139.
	108" desk	109"	<b>AR1 EJ7</b>	151.
	96" wall/120" desk	121"	<b>AR1 EJ8</b>	162.
	120" wall/144" desk	145"	<b>AR1 EJ10</b>	186.

Order Code	Specification Information	Application Notes
Example: <b>AR1 EJ5</b>	Raceway components distribute four 20-amp circuits in desk and credenza service beams: two convenience circuits and two protected circuits with heavy grounds and heavy-duty #10 neutrals.  <i>For outlet module specify paint finish.</i>	Jumper cables connect power from outlet module to outlet module. Specify application length between centerlines of beams with outlet modules.  Desk outlet module mounts in center of beam, in lower tray. Module accepts two or four duplex outlets plus two jumper cables at each end. Duplex outlets snap into outlet modules. Four outlet module fits nominal beam lengths of 60" or larger.  Desk-to-desk linking bracket links any beam ends or corners, universal for all joint conditions. Desk-to-wall linking bracket connects between wall attachment zone and beam end or corner.
<b>AR1</b> Raceway		
<b>E</b> 2+2, eight wire		
<b>J</b> Jumpers		
<b>5</b> Width		

# Power components for desks and credenzas

Currents

## 2 + 2 Raceway outlets, infeeds, cord tray

description	type	w	d	h	pattern no.	black	orange (-0) or orange triangle (-T)	black/orange	paint
Duplex outlet	Circuit A				<b>AR1 DA</b>	\$29.			
	Circuit B				<b>AR1 DB</b>	29.			
	Circuit X				<b>AR1 DX</b>	29.	34.		
	Circuit Y				<b>AR1 DY</b>	29.	34.		
Power infeeds	Hardwire infeed				<b>AR1 DEHI( )</b>				232.
	Modular infeed				<b>AR1 DEPI</b>				174.
Credenza stanchion outlet (includes outlets)					<b>AR1 OHS ( )</b>	174.		186.	
Auxiliary cord tray		20"	2"	6"	<b>AR1 CB</b>				92.

Order Code	Specification Information	Application Notes
Example: <b>AR1 DEPI</b>	Raceway components distribute four 20-amp circuits in desk and credenza service beams: two convenience circuits and two protected circuits with heavy grounds and heavy-duty #10 neutrals.	Modular infeed is 7' liquidtight flexible conduit with pigtailed on one end and modular jumper plug on other end. Hardwire infeed is field-wirable junction box which fastens to beam and has modular jumper and plug.
<b>AR1</b> Raceway		
<b>DEPI</b> Infeed type		
	<p><i>For outlet module specify paint finish.</i></p> <p><i>For stanchion outlet specify:</i></p> <p>N All black outlet faces</p> <p>NO Black A/B and orange X/Y</p>	<p>Credenza stanchion outlet includes two duplex outlets, with one outlet accessing each of circuits A, B, X, and Y. Outlet housings have flexible conduit leadout, terminated by a dual modular connector which accepts jumpers.</p> <p>Auxiliary cord tray attaches beneath stiffener under desk or panel-mounted worksurface to accommodate transformers or a bundle of cables. U.L. does not permit outlet strip in auxiliary cord tray.</p>

# Power components for desks and credenzas

Currents

## 3 + 3 Raceway

### outlet, linking bracket, jumper cable

description	type	w	d	h	pattern no.	no finish/paint
Outlet module for desk service beam	36", 42", 48" beam	12"			<b>AR1 DTM2 ( )</b>	\$243.
	60", 72", 84" beam	24"			<b>AR1 DTM4 ( )</b>	318.
Desk to wall linking bracket					<b>AA1DW( )</b>	139.
Jumper cable	12" wall/36" desk	37"			<b>AR1 TJ1</b>	81.
	24" wall/48" desk	49"			<b>AR1 TJ2</b>	105.
	36" wall/60" desk	61"			<b>AR1 TJ3</b>	128.
	48" wall/72" desk	73"			<b>AR1 TJ4</b>	139.
	60" wall/84" desk	85"			<b>AR1 TJ5</b>	151.
	72" wall/96" desk	97"			<b>AR1 TJ6</b>	162.
	108" desk	109"			<b>AR1 TJ7</b>	186.
	96" wall/120" desk	121"			<b>AR1 TJ8</b>	186.
	120" wall/144" desk	145"			<b>AR1 TJ10</b>	208.
Desk-to-desk/credenza linking bracket					<b>AA1DD( )</b>	40.

Order Code	Specification Information	Application Notes
Example: <b>AR1 DTM4 117</b>		
<b>AR1</b> Raceway	Raceway components distribute four 20-amp circuits in desk and credenza service beams: three convenience circuits and three protected circuits with heavy grounds and heavy-duty #10 neutrals.	Knoll 3+3, six circuit power components mount in desk beams and in credenza stanchions. Powered desks and credenzas must be specified with glides (not casters) and linking brackets.
<b>DT</b> 3+3, desk		
<b>M</b> Outlet module		
<b>4</b> Four outlets		
<b>117</b> Finish		
	<i>For outlet module specify paint finish. For stanchion outlet specify all:</i>	Desk outlet module mounts in center of beam, in lower tray. Module accepts two or four duplex outlets plus two jumper cables at each end. Duplex outlets snap into outlet module. Four outlet module fits nominal beam lengths of 60" or larger.
	N Black outlet faces	Jumper cables connect power from outlet module to outlet module. Specify actual length between centerlines of beams with outlet modules.
	NO Black A/B and orange X/Y	

# Power components for desks and credenzas

Currents

## 3 + 3 Raceway outlets, infeeds, cord tray

description	type	w	d	h	pattern no.	black	orange (-0) or orange triangle (-T)	black/ orange	no finish/ paint
Duplex outlet	Circuit A				<b>AR1 DA</b>	\$29.			
	Circuit B				<b>AR1 DB</b>	29.			
	Circuit C				<b>AR1 DC</b>	29.			
	Circuit X				<b>AR1 DX</b>	29.	34.		
	Circuit Y				<b>AR1 DY</b>	29.	34.		
	Circuit Z				<b>AR1 DZ</b>	29.	34.		
Power infeeds	Hardwire base infeed				<b>AR1 DTH( )</b>				266.
	Modular infeed				<b>AR1 DTPI</b>				197.
Credenza stanchion outlet (includes outlets)					<b>AR1 OHS ( )</b>	174.		186.	
Auxiliary cord tray		20"	2"	6"	<b>AR1 CB</b>				92.

### Order Code

Example:	<b>AR1 DTPI</b>
<b>AR1</b>	Raceway
<b>DTPI</b>	Infeed type

### Specification Information

Raceway components distribute four 20-amp circuits in desk and credenza service beams: three convenience circuits and three protected circuits with heavy grounds and heavy-duty #10 neutrals.

*For outlet module specify paint finish.*

*For stanchion outlet specify all:*

- N Black outlet faces
- NO Black A/B and orange X/Y


### Application Notes

Modular infeed is 7' liquidtight flexible conduit with pigtails on one end and modular jumper plug on other end. Hardwire infeed is field-wirable junction box which fastens to beam and has modular jumper end.


Credenza stanchion outlet includes two duplex outlets, with one outlet accessing each of circuits A, B, X, and Y. Outlet housings have flexible conduit leadout, terminated by a dual modular connector which accepts jumpers. Auxiliary cord tray attaches beneath stiffener under desk or panel-mounted worksurface to accommodate transformers or a bundle of cables. U.L. does not permit outlet strip in auxiliary cord tray.




description	type	w	d	h	pattern no.	black	no finish	paint
Power monument		28"	5"	36"	<b>AA1PM( )</b>			\$1,377.



Cable container (one side)		24"	2"	16"	<b>AA1PMCC( )</b>			229.
----------------------------	--	-----	----	-----	-------------------	--	--	------




Power module, 2+2	2+2				<b>AR1 EPM</b>			121.
	3+3				<b>AR1 TPM</b>			139.



Outlet fillers (Set of 10)					<b>AR OF</b>			26.
----------------------------	--	--	--	--	--------------	--	--	-----

Hinged outlet flap (each)					<b>APC OCF</b>			21.
---------------------------	--	--	--	--	----------------	--	--	-----

Ceiling infeed top					<b>AA1PMCIA( )</b>			114.
--------------------	--	--	--	--	--------------------	--	--	------



**Order Code**

Example: <b>AA1 PM 117</b>	
<b>AA1</b> Accessory	
<b>PM</b> Power monument	
<b>117</b> Finish	

**Specification Information**

Specify painted finish for power monument, cable containers or ceiling infeed top.

**Application Notes**

Power monument is floorstanding monument providing power and data/telecommunications outlets above worksurface height (36").

Power monument may be planned at the center of a group of worktables or C-leg desks in an active meeting area.

Power monument cable containers attach to each face of power monument for excess cable bundling below worksurface height (21"). Each face of power monument accepts one cable container.

Power monument provides four pairs of outlet openings on each side which may be duplex outlets, PDC modules or black fillers.

Power modules support one pair of duplex outlets each side. Specify up to four modules (eight duplexes each side).

For 2+2 power specify duplexes, **AR1 EPC1** power connectors between modules and **AR1 EPI5** infeed for floor feed, or **AR1 EPIC** for ceiling infeed (see page ). For 3+3 power specify duplexes, **AR1 TPC1** connectors, **AR1 TPI5** or **AR1 TPIC**.


Hinged outlet flap covers two outlet openings; four flaps on each side of power monument cover all openings.

Ceiling infeed top replaces standard top for use with Currents ceiling infeed (page 27 or 29) and infeed panel (page 39).

# Privacy screens for desks and credenzas

## *perforated steel*


Currents


description	w	d	h	pattern no.	perforated
	36"	1"	9"	<b>AZ1 0936H ( )</b>	\$275.
	42"	1"	9"	<b>AZ1 0942H ( )</b>	288.
	48"	1"	9"	<b>AZ1 0948H ( )</b>	298.
	60"	1"	9"	<b>AZ1 0960H ( )</b>	321.
	72"	1"	9"	<b>AZ1 0972H ( )</b>	344.

Order Code	Specification Information	Application Notes
Example: <b>AZ1 0936 H 117</b>	<i>Privacy screen surface types:</i>	<p>Privacy screens plug into corresponding width service beam at back edge of desks and credenzas.</p> <p>Screens to 30"H are painted finish, perforated steel, to conceal cable clutter from desktop equipment to service beam. Higher screens are tackable/acoustical upholstered surface on both sides.</p> <p>Screens include brackets to mount to desk or credenza with service beams of corresponding width. Two 36"W screens may be specified for 72"W desks.</p> <p>One 48"W screen can also be planned at either end of 72" straight or corner beam.</p> <p>Screens may be shared between desks in back-to-back configurations.</p>
<b>AZ1</b> Privacy screen	H Perforated (9" only)	
<b>09</b> Height		
<b>36</b> Width		
<b>H</b> Surface		
<b>117</b> Bracket finish		

# Privacy screens for desks and credenzas *upholstered*

Currents

description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
	36"	1 3/8"	18"	<b>AZ1 1836F ( ) ( )</b>	\$399.	\$413.	\$426.	\$454.	\$468.	\$483.	\$495.	\$523.	\$556.
	42"	1 3/8"	18"	<b>AZ1 1842F ( ) ( )</b>	420.	436.	452.	485.	499.	517.	532.	561.	594.
	48"	1 3/8"	18"	<b>AZ1 1848F ( ) ( )</b>	441.	459.	477.	514.	532.	550.	569.	597.	631.
	60"	1 3/8"	18"	<b>AZ1 1860F ( ) ( )</b>	528.	550.	573.	620.	643.	666.	688.	726.	772.
	72"	1 3/8"	18"	<b>AZ1 1872F ( ) ( )</b>	n/a	624.	n/a	n/a	n/a	n/a	n/a	n/a	n/a



description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
	36"	1 3/8"	27"	<b>AZ1 2736F ( ) ( )</b>	498.	517.	534.	568.	586.	602.	620.	659.	695.
	42"	1 3/8"	27"	<b>AZ1 2742F ( ) ( )</b>	528.	545.	571.	605.	625.	646.	666.	703.	734.
	48"	1 3/8"	27"	<b>AZ1 2748F ( ) ( )</b>	550.	573.	597.	643.	666.	688.	711.	747.	775.
	60"	1 3/8"	27"	<b>AZ1 2760F ( ) ( )</b>	659.	688.	718.	775.	804.	832.	861.	907.	964.
	72"	1 3/8"	27"	<b>AZ1 2772F ( ) ( )</b>	n/a	780.	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Order Code	Specification Information	Application Notes
Example: <b>AZ1 1848 F15 117</b>	<i>Privacy screen surface types:</i>	<i>Specify painted finish for perforated screens and screen brackets.</i>
<b>AZ1</b> Privacy screen	H Perforated (9" only)	
<b>18</b> Height	<i>Specify finish:</i>	Edges of privacy screens are trim grey.
<b>48</b> Width	F Tackable fabric (18" or 27"H)	
<b>F</b> Surface	<i>Specify fabric group:</i>	Screens to 30"H are painted finish, perforated steel, to conceal cable clutter from desktop equipment to service beam. Higher screens are tackable/acoustical upholstered surface on both sides.
<b>15</b> Fabric group	10 Fabric group 10	
<b>117</b> Bracket finish	15 Fabric group 15	
	20 Fabric group 20	
	30 Fabric group 30	
	35 Fabric group 35	
	40 Fabric group 40	
	45 Fabric group 45	
	50 Fabric group 50	
	55 Fabric group 55	
		Screens include brackets to mount to desk or credenza with service beams of corresponding width. Two 36"W screens may be specified for 72"W desks.
	One 48"W screen can also be planned at either end of 72" straight or corner beam.	
	Screens may be shared between desks in back-to-back configurations.	

# Privacy screens for desks and credenzas

## *windows and connectors*

Currents

description	width	depth	height	pattern number	list price
 Windows	36"	1"	9"	<b>AZ1 U0936T ( )</b>	\$275.
	42"	1"	9"	<b>AZ1 U0942T ( )</b>	304.
	48"	1"	9"	<b>AZ1 U0948T ( )</b>	333.
	60"	1"	9"	<b>AZ1 U0960T ( )</b>	402.
Straight privacy screen connectors	–	–	–	<b>AZ1 CS</b>	24.
 Corner privacy screen connectors	1"	–	18"	<b>AZ1 CL18 ( )</b>	46.
	1"	–	27"	<b>AZ1 CL27 ( )</b>	58.
	1"	–	36"	<b>AZ1 CL36 ( )</b>	70.

### Order Code

Example:	<b>AZ1 U0948T 117</b>
<b>AZ1</b>	Privacy screen
<b>U</b>	Window
<b>09</b>	Height
<b>48</b>	Width
<b>T</b>	Surface finish
<b>117</b>	Frame finish

### Specification Information

*Specify painted finish for window frame and corner connectors.*  
 Windows are translucent acrylic. Ends of windows are trim grey.

### Application Notes

Windows attach to top of any same-width upholstered privacy screen to add enclosure to a desk or credenza.

Windows on 18"H screens align with 27"H screens, 48" above floor. Windows on 27"H screens add-up to 57" above floor.

Screen connectors align adjacent screens (or screens with windows) in clusters of desks and credenzas. Corner connectors include vertical trim to fill corner.

Specify two corner connectors for a three-way T-connection.

Specify three corner connectors for a four-way X-connection

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
A1 R1 SI	101, 102	AA1LO24DN	94	AA1RWC45	129	AB1 CLF24R	64
A1 RTOPL	101, 102	AA1LO30DN	94	AA1RWC46	129	AB1 CLF30L	64
A1 RTOPR	101, 102	AA1LO36DN	94	AA1RWC47	129	AB1 CLF30R	64
A2 R48 LL	101	AA1LO42DN	94	AA1RWC53	129	AB1 CS	88
A2 R48 LP	101	AA1LO48DN	94	AA1RWC54	129	AB1 FAE	27
A2 R48 LV	101	AA1MET30	28	AA1RWC55	129	AB1 FE	63
A2 R48 RL	101	AA1MET39	28	AA1RWC63	129	AB1 I25(G/C)	64
A2 R48 RP	101	AA1MET42	28	AA1RWC64	129	AB1 I27A(G/C)	64
A2 R48 RV	101	AA1MET48	28	AA1RWC74	129	AB1 I27F(G/C)	64
A2 R64 LP	101	AA1MET56	28	AA1RWL36	129	AB1 VL	64
A2 R64 RP	101	AA1MET64	28	AA1RWL42	129	AB1-ABC24	63
A2L 48 LL	102	AA1MET74	28	AA1RWL48	129	AB2 AE	63
A2L 48 LP	102	AA1MET80	28	AA1RWL60	129	AC 24 C 2 C	122, 123
A2L 48 LV	102	AA1MPS30	28	AA1RWL72	129	AC 24 C 2 C N	124
A2L 48 RL	102	AA1MPS39	28	AA1RWL84	129	AC 24 C 2 G	122, 123
A2L 48 RP	102	AA1MPS42	28	AA1RWR36	129	AC 24 C 2 G N	124
A2L 48 RV	102	AA1MPS48	28	AA1RWR42	129	AC 30 C 2 C	122, 123
A2L 64 LP	102	AA1MPS56	28	AA1RWR48	129	AC 30 C 2 C N	124
A2L 64 RP	102	AA1MPS64	28	AA1RWR60	129	AC 30 C 2 G	122, 123
AA139E	82	AA1MPS74	28	AA1RWR72	129	AC 30 C 2 G N	124
AA148E	82	AA1MPS80	28	AA1RWR84	129	AC 3A 11	127, 128
AA164E	82	AA1MRS	28	AA1T06	82	AC 3A 22	127, 128
AA1B	85	AA1NSK	26, 82	AA1T18	82	AC 3A 23	127, 128
AA1BP6	130	AA1OR	21	AA1T24	82	AC 3A 32	127, 128
AA1C36T	87	AA1ORD	21	AA1T30	82	AC 3B 11	125, 126
AA1CET39	28	AA1PM	137	AA1T36	82	AC 3B 22	125, 126
AA1CET48	28	AA1PMCC	137	AA1T42	82	AC 3B 23	125, 126
AA1CET64	28	AA1PMCIA	137	AA1T48	82	AC 3B 32	125, 126
AA1CG	26	AA1PS24	88	AA1T60	82	AC 4A 11	127, 128
AA1DD	133, 135	AA1RE	82	AA1UA39	33	AC 4A 22	127, 128
AA1DT36	132	AA1RODN	94	AA1UA48	33	AC 4A 23	127, 128
AA1DT42	132	AA1ROUP	94	AA1UA64	33	AC 4A 32	127, 128
AA1DT48	132	AA1ROXUP	94	AA1UPS39	33	AC 4B 11	125, 126
AA1DT60	132	AA1RPS34	31	AA1UPS48	33	AC 4B 22	125, 126
AA1DT72	132	AA1RPS42	31	AA1UPS64	33	AC 4B 23	125, 126
AA1DT84	132	AA1RPS49	31	AA1WS24	131	AC 4B 32	125, 126
AA1DW	133, 135	AA1RPS64	31	AA1WS30	131	AC1 39E1	83
AA1ECUP64	94	AA1RPS79	31	AA1WS36	131	AC1 39L2	83
AA1ECUP65	94	AA1RS11	132	AA1WS48	131	AC1 39T3	83
AA1EDWS	94	AA1RS20	132	AA1WSD	131	AC1 39V2	84
AA1EPS40	30	AA1RSDN	94	AA1WSF18	131	AC1 39X4	83
AA1EPS48	30	AA1RSOC11	132	AA1WSF24	131	AC1 39Y3	84
AA1EPS53	30	AA1RSOC20	132	AA1WSF36	131	AC1 48E1	83
AA1EPS60	30	AA1RSUP	94	AA1WST18	131	AC1 48L2	83
AA1EPS65	30	AA1RSXDN	94	AA1WST24	131	AC1 48T3	83
AA1FCET39	35	AA1RSXDN	94	AA1WST36	131	AC1 48V2	84
AA1FCET48	35	AA1RSXUP	94	AA1WSTE18	131	AC1 48X4	83
AA1FCET64	35	AA1RTC	31	AA1WSTE24	131	AC1 48Y3	84
AA1FMET30	35	AA1RW36	129	AA1WSTE36	131	AC1 64E1	83
AA1FMET39	35	AA1RW3C	130	AA2 MTC	28, 34	AC1 64L2	83
AA1FMET42	35	AA1RW42	129	AA2 UTC	33, 34	AC1 64T3	83
AA1FMET48	35	AA1RW48	129	AA3EPS41	30	AC1 64V2	84
AA1FMET56	35	AA1RW4C	130	AA3EPS49	30	AC1 64X4	83
AA1FMET64	35	AA1RW60	129	AA3EPS61	30	AC1 64Y3	84
AA1FMPS30	34	AA1RW72	129	AA3EPS64	30	AC1 FS18	132
AA1FMPS39	34	AA1RW84	129	AB1 AC24	63	AC1 FS24	132
AA1FMPS42	34	AA1RWC	130	AB1 CL24L	64	AC1 FS30	132
AA1FMPS48	34	AA1RWC35	129	AB1 CL24R	64	ACE1BD6648D(L/R)	58
AA1FMPS56	34	AA1RWC36	129	AB1 CL30L	64	ACE1BD6648S(L/R)	58
AA1FMPS64	34	AA1RWC4242	129	AB1 CL30R	64	ACE1BD7248D(L/R)	58
AA1FUPS39	34	AA1RWC44	129	AB1 CLF24L	64	ACE1BD7248S(L/R)	58

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
ACE1BD7848D(L/R)	58	ACE1R7824N	56	AD C45 SH	111	AD C64 LA	118
ACE1BD7848S(L/R)	58	ACE1R7830N	56	AD C46 DA	119	AD C64 LB	114
ACE1BD8448D(L/R)	58	ACE1R8424N	56	AD C46 DB	115	AD C64 LF	106
ACE1BD8448S(L/R)	58	ACE1R8430N	56	AD C46 DF	107	AD C64 LH	110
ACE1H4818	61	ACE1R9024N	56	AD C46 DH	111	AD C64 SA	118
ACE1H4818P	61	ACE1R9030N	56	AD C46 RA	119	AD C64 SB	114
ACE1H6024	61	ACE1R9624N	56	AD C46 RB	115	AD C64 SF	106
ACE1H6024P	61	ACE1R9630N	56	AD C46 RF	107	AD C64 SH	110
ACE1L3636SSN	57	ACE1W362430N	62	AD C46 RH	111	AD C74 DA	118
ACE1L4242DSN	57	ACE1W363024N	62	AD C46 SA	119	AD C74 DB	114
ACE1L4242SDN	57	ACE1W422430N	62	AD C46 SB	115	AD C74 DF	106
ACE1L4242SSN	57	ACE1W423024N	62	AD C46 SF	107	AD C74 DH	110
ACE1L4260SSN	59	ACE1W482430N	62	AD C46 SH	111	AD C74 LA	118
ACE1L4266SSN	59	ACE1W483024N	62	AD C47 DA	119	AD C74 LB	114
ACE1L4272SSN	59	ACE1W722430N	62	AD C47 DB	115	AD C74 LF	106
ACE1L4278SSN	59	ACE1W723024N	62	AD C47 DF	107	AD C74 LH	110
ACE1L4848DDN	57	AD C35 SA	119	AD C47 DH	111	AD C74 SA	118
ACE1L4848DSN	57	AD C35 SB	115	AD C47 RA	119	AD C74 SB	114
ACE1L4848SDN	57	AD C35 SF	107	AD C47 RB	115	AD C74 SF	106
ACE1L4848SSN	57	AD C35 SH	111	AD C47 RF	107	AD C74 SH	110
ACE1L4860DSN	59	AD C36 SA	119	AD C47 RH	111	AD S36 DA	121
ACE1L4860SDN	59	AD C36 SB	115	AD C47 SA	119	AD S36 DB	117
ACE1L4860SSN	59	AD C36 SF	107	AD C47 SB	115	AD S36 DF	109
ACE1L4866DSN	59	AD C36 SH	111	AD C47 SF	107	AD S36 DH	113
ACE1L4866SDN	59	AD C4242 DB	116	AD C47 SH	111	AD S36 SA	121
ACE1L4866SSN	59	AD C4242 DF	108	AD C53 SA	118	AD S36 SB	117
ACE1L4872DSN	59	AD C4242 LA	120	AD C53 SB	114	AD S36 SF	109
ACE1L4872SDN	59	AD C4242 LB	116	AD C53 SF	106	AD S36 SH	113
ACE1L4872SSN	59	AD C4242 LF	108	AD C53 SH	110	AD S42 DA	121
ACE1L4878SSN	59	AD C4242 LH	112	AD C54 DA	118	AD S42 DB	117
ACE1L4884SSN	59	AD C4242 RA	120	AD C54 DB	114	AD S42 DF	109
ACE1L6042SSN	59	AD C4242 RB	116	AD C54 DF	106	AD S42 DH	113
ACE1L6048DSN	59	AD C4242 RF	108	AD C54 DH	110	AD S42 SA	121
ACE1L6048SDN	59	AD C4242 RH	112	AD C54 LA	118	AD S42 SB	117
ACE1L6048SSN	59	AD C4242 SA	120	AD C54 LB	114	AD S42 SF	109
ACE1L6642SSN	59	AD C4242 SB	116	AD C54 LF	106	AD S42 SH	113
ACE1L6648DSN	59	AD C4242 SF	108	AD C54 LH	110	AD S48 DA	121
ACE1L6648SDN	59	AD C4242 SH	112	AD C54 SA	118	AD S48 DB	117
ACE1L6648SSN	59	AD C44 DA	120	AD C54 SB	114	AD S48 DF	109
ACE1L7242SSN	59	AD C44 DB	116	AD C54 SF	106	AD S48 DH	113
ACE1L7248DSN	59	AD C44 DF	108	AD C54 SH	110	AD S48 SA	121
ACE1L7248SDN	59	AD C44 DH	112	AD C55 DA	120	AD S48 SB	117
ACE1L7248SSN	59	AD C44 LA	120	AD C55 DB	116	AD S48 SF	109
ACE1L7842SSN	60	AD C44 LB	116	AD C55 DF	108	AD S48 SH	113
ACE1L7848SSN	60	AD C44 LF	108	AD C55 DH	112	AD S60 DA	121
ACE1L8448SSN	60	AD C44 LH	112	AD C55 LA	120	AD S60 DB	117
ACE1R1212C	61	AD C44 RA	120	AD C55 LB	116	AD S60 DF	109
ACE1R2424N	56	AD C44 RB	116	AD C55 LF	108	AD S60 DH	113
ACE1R2430N	56	AD C44 RF	108	AD C55 LH	112	AD S60 SA	121
ACE1R3024N	56	AD C44 RH	112	AD C55 RA	120	AD S60 SB	117
ACE1R3030N	56	AD C44 SA	120	AD C55 RB	116	AD S60 SF	109
ACE1R3624N	56	AD C44 SB	116	AD C55 RF	108	AD S60 SH	113
ACE1R3630N	56	AD C44 SF	108	AD C55 RH	112	AD S72 DA	121
ACE1R4224N	56	AD C44 SH	112	AD C55 SA	120	AD S72 DB	117
ACE1R4230N	56	AD C45 DA	119	AD C55 SB	116	AD S72 DF	109
ACE1R4824N	56	AD C45 DB	115	AD C55 SF	108	AD S72 DH	113
ACE1R4830N	56	AD C45 DF	107	AD C55 SH	112	AD S72 SA	121
ACE1R5424N	56	AD C45 DH	111	AD C63 SA	118	AD S72 SB	117
ACE1R5430N	56	AD C45 RA	119	AD C63 SB	114	AD S72 SF	109
ACE1R6024N	56	AD C45 RB	115	AD C63 SF	106	AD S72 SH	113
ACE1R6030N	56	AD C45 RF	107	AD C63 SH	110	AD S84 SA	121
ACE1R6624N	56	AD C45 RH	111	AD C64 DA	118	AD S84 SB	117
ACE1R6630N	56	AD C45 SA	119	AD C64 DB	114	AD S84 SF	109
ACE1R7224N	56	AD C45 SB	115	AD C64 DF	106	AD S84 SH	113
ACE1R7230N	56	AD C45 SF	107	AD C64 DH	110	AF 3924 TCP	85

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AF 3936 TCP	85	API 4830	78	APC 0960 C	14	APR 72	10
AF 3948 TCP	85	API 4830 N	79	APC 0960 F	16	APR 720	10
AF 3960 TCP	85	API 4830M	80, 81	APC 0960 G	19	APT	25, 30
AF 3972 TCP	85	API 4836	78	APC 0960 M	15	APT 48	10
AF 4824 TCP	85	API 4836 N	79	APC 0960 P	15	APT 60	10
AF 4836 TCP	85	API 4836M	80, 81	APC 0960 S	14	APT 72	10
AF 4848 AM	86	API 4842	78	APC 0972 A	17	APT C24	25
AF 4848 TCM	86	API 4842 N	79	APC 0972 C	14	APT C36	25
AF 4848 TCP	85	API 4842M	80, 81	APC 0972 F	16	APT C48	25
AF 4860 AM	86	API 4848	78	APC 0972 G	19	APT C60	25
AF 4860 TCM	86	API 4848 N	79	APC 0972 M	15	APT C72	25
AF 4860 TCP	85	API 4848M	80, 81	APC 0972 P	15	APX CIP4	42
AF 4872 TCM	86	API 4860	78	APC 0972 S	14	APX CIP6	42
AF 4872 TCP	85	API 4860 N	79	APC 1624 G	19	APX CIP8	42
AF 6424 TCP	85	API 6418	78	APC 1636 A	17	AR OF	13, 43, 132, 137
AF 6436 TCP	85	API 6418 A	79	APC 1636 F	16	AR1 CB	134, 136
AF 6448 AM	86	API 6424	78	APC 1636 G	19	AR1 DA	36, 39, 134, 136
AF 6448 TCM	86	API 6424 A	79	APC 1648 A	17	AR1 DB	36, 39, 134, 136
AF 6448 TCP	85	API 6424M	80, 81	APC 1648 F	16	AR1 DC	39, 136
AF 6460 AM	86	API 6430	78	APC 1648 G	19	AR1 DEHI	134
AF 6460 TCM	86	API 6430 A	79	APC 1648 M	15	AR1 DEM2	133
AF 6460 TCP	85	API 6430M	80, 81	APC 1648 P	15	AR1 DEM4	133
AFWB	85	API 6436	78	APC 1660 A	17	AR1 DEPI	134
AL1 A3918	95	API 6436 A	79	APC 1660 F	16	AR1 DTHI	136
AL1 A3924	95	API 6436M	80, 81	APC 1660 G	19	AR1 DTM2	135
AL1 A4818	95	API 6442	78	APC 1660 M	15	AR1 DTM4	135
AL1 A4824	95	API 6442 A	79	APC 1660 P	15	AR1 DTPI	136
AL1 A6418	95	API 6442M	80, 81	APC 1672 A	17	AR1 DX	36, 39, 134, 136
AL1 A6424	95	API 6448	78	APC 1672 F	16	AR1 DY	36, 39, 134, 136
AL1 AA	95	API 6448 A	79	APC 1672 G	19	AR1 DZ	39, 136
AL1 C39	95	API 6448M	80, 81	APC 1672 M	15	AR1 E2	38
AL1 C48	95	API 6460	78	APC 1672 P	15	AR1 E3	38
AL1 C64	95	API 6460 A	79	APC 1836 A	17	AR1 EJ1	37, 133
AMB CP12-AMP	43	API LF	82	APC 1848 A	17	AR1 EJ10	37, 133
AMB CP24 LUC	43	APA 39	25	APC 1860 A	17	AR1 EJ12	37
AMC B10	43	APA 48	25	APC 1872 A	17	AR1 EJ2	37, 133
AMC FP2 (L or N)	43	APA 64	25	APC 2736 A	18	AR1 EJ3	37, 133
AMC FP3 (L or N)	43	APC 0912 A	17	APC 2748 A	18	AR1 EJ4	37, 133
AMC O3	43	APC 0912 C	14	APC 2760 A	18	AR1 EJ5	37, 133
AMC O5E	43	APC 0912 CX	14	APC 2772 A	18	AR1 EJ6	37, 133
AMC O6	43	APC 0912 F	16	APC AZ48	11	AR1 EJ7	133
AMC OF500	43	APC 0912 P	15	APC AZ48 F	12	AR1 EJ8	37, 133
AMC OF625	43	APC 0912 S	14	APC AZ60	11	AR1 EOM	36
AMC PDC 5E4N	43	APC 0924 A	17	APC AZ60 F	12	AR1 EPC1	38
AMC5 CP12	43	APC 0924 C	14	APC AZ72	11	AR1 EPC2	38
AMC5 OC20(A or B)	43	APC 0924 F	16	APC AZ72 F	12	AR1 EPH1	37
AMC5 OC30(A or B)	43	APC 0924 G	19	APC HOC	13	AR1 EPH2	37
AMC5 OC40(A or B)	43	APC 0924 M	15	APC OC	13	AR1 EPHF	26
AMC5 OC50(A or B)	43	APC 0924 P	15	APC OCF	13, 137	AR1 EPI2	37
API 3918 N	79	APC 0924 S	14	APF 1848	9	AR1 EPI5	37
API 3924	78	APC 0936 A	17	APF 1860	9	AR1 EPIC	37
API 3924 N	79	APC 0936 C	14	APF 1872	9	AR1 EPM	137
API 3930 N	79	APC 0936 F	16	APF1 3948	8	AR1 ET1	37
API 3936	78	APC 0936 G	19	APF1 3960	8	AR1 ET3	37
API 3936 N	79	APC 0936 M	15	APF1 3972	8	AR1 ET5	37
API 3942 N	79	APC 0936 P	15	APF1 4848	8	AR1 ET8	37
API 3948	78	APC 0936 S	14	APF1 4860	8	AR1 HCC H10	42
API 3948 N	79	APC 0948 A	17	APF1 4872	8	AR1 HOB	13
API 3960	78	APC 0948 C	14	APF1 6448	8	AR1 HOB2	13
API 3960 N	79	APC 0948 F	16	APF1 6460	8	AR1 OHS	134, 136
API 4818	78	APC 0948 G	19	APF1 6472	8	AR1 PCC 100	42
API 4818 N	79	APC 0948 M	15	APR 48	10	AR1 RCM 10	42
API 4824	78	APC 0948 P	15	APR 480	10	AR1 T2	40
API 4824 N	79	APC 0948 S	14	APR 60	10	AR1 T3	40
API 4824M	80, 81	APC 0960 A	17	APR 600	10	AR1 TJ1	40, 135

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AR1 TJ10	40, 135	AT1 E24RA	104	AU1 X121	68	AW1 C6060 L	45
AR1 TJ12	40	AT1 E24RF	104	AU1 X128	68	AW1 C6060 R	45
AR1 TJ2	40, 135	AT1 P36A	103	AU1 X312	68	AW1 C6060 S	45
AR1 TJ3	40, 135	AT1 P36F	103	AU1 X321	68	AW1 C7236 S	46
AR1 TJ4	40, 135	AT1 R42A	105	AU1 X328	68	AW1 C7242 L	46
AR1 TJ5	40, 135	AT1 R42F	105	AUA1224	67	AW1 C7242 R	46
AR1 TJ6	40, 135	AT1 R48A	105	AUA1236	67	AW1 C7242 S	46
AR1 TJ7	135	AT1 R48F	105	AUA1248	67	AW1 C7248 D	46
AR1 TJ8	40, 135	AT1 TA	103	AUA1260	67	AW1 C7248 L	46
AR1 TOM	39	AT1 TL	103	AUA1272	67	AW1 C7248 R	46
AR1 TPC1	40	AT1 W24A	103	AUA2124	67	AW1 C7248 S	46
AR1 TPC2	40	AT1 W24F	103	AUA2136	67	AW1 C8436 S	46
AR1 TPH1	40	AT1 W30A	104	AUA2148	67	AW1 C8442 L	46
AR1 TPH2	40	AT1 W30F	104	AUA2160	67	AW1 C8442 R	46
AR1 TPHF	26	AT1 W50A	105	AUA2172	67	AW1 C8442 S	46
AR1 TPI2	40	AT1 W50F	105	AUA2824	67	AW1 C8448 D	46
AR1 TPI5	40	AU 1212 T 4	27	AUA2836	67	AW1 C8448 L	46
AR1 TPIC	40	AU 1224 A	66	AUA2848	67	AW1 C8448 R	46
AR1 TPM	137	AU 1224 H	65	AUA2860	67	AW1 C8448 S	46
AR1 TT1	40	AU 1224 TC	65	AUA2872	67	AW1 CS3612	88
AR1 TT3	40	AU 1236 A	66	AW1 A60L	49	AW1 CS4812	88
AR1 TT5	40	AU 1236 H	65	AW1 A60R	49	AW1 CS6012	88
AR1 TT8	40	AU 1236 TC	65	AW1 A72L	49	AW1 CS7212	88
AR1 VCM	26	AU 1248 A	66	AW1 A72R	49	AW1 F2424	44
AR1-ELS-B	36, 39	AU 1248 H	65	AW1 C3660 S	47	AW1 F3024	44
ARE1 DA	41	AU 1248 TC	65	AW1 C3672 S	47	AW1 F3624	44
ARE1 DB	41	AU 1260 A	66	AW1 C3684 S	47	AW1 F3630	44
ARE1 DC	41	AU 1260 H	65	AW1 C4242 D	45	AW1 F4224	44
ARE1 DX	41	AU 1260 TC	65	AW1 C4242 L	45	AW1 F4824	44
ARE1 DX (O or T)	41	AU 1272 H	65	AW1 C4242 R	45	AW1 F4830	44
ARE1 DY	41	AU 1272 TC	65	AW1 C4242 S	45	AW1 F6024	44
ARE1 DY (O or T)	41	AU 2124 A	66	AW1 C4260 L	47	AW1 F6030	44
ARE1 DZ	41	AU 2124 H	65	AW1 C4260 R	47	AW1 F6624	44
ARE1 DZ (O or T)	41	AU 2124 TC	65	AW1 C4260 S	47	AW1 F7224	44
ARE1 EP1	41	AU 2136 A	66	AW1 C4272 L	47	AW1 F7230	44
ARE1 ET1	41	AU 2136 H	65	AW1 C4272 R	47	AW1 F8424	44
ARE1 ET3	41	AU 2136 TC	65	AW1 C4272 S	47	AW1 F8430	44
ARE1 ET5	41	AU 2148 A	66	AW1 C4284 L	47	AW1 P4875 S	48
ARE1 TP1	41	AU 2148 H	65	AW1 C4284 R	47	AW1 P4887 S	48
ARE1 TT1	41	AU 2148 TC	65	AW1 C4284 S	47	AW1 P7548 S	48
ARE1 TT3	41	AU 2160 A	66	AW1 C4848 D	45	AW1 P8748 S	48
ARE1 TT5	41	AU 2160 H	65	AW1 C4848 L	45	AW1 R7236	49
AS1 BKH	98	AU 2160 TC	65	AW1 C4848 R	45	AW1 S2424	44
AS1 BKL	98	AU 2172 H	65	AW1 C4848 S	45	AW1 S3024	44
AS1 DDF M	96	AU 2172 TC	65	AW1 C4860 D	47	AW1 S3624	44
AS1 DDFO	96	AU 2824 A	66	AW1 C4860 L	47	AW1 S3630	44
AS1 DFF G	97	AU 2824 TC	65	AW1 C4860 R	47	AW1 S4224	44
AS1 DFF M	96	AU 2836 A	66	AW1 C4860 S	47	AW1 S4824	44
AS1 DPAD	99, 100	AU 2836 TC	65	AW1 C4872 D	47	AW1 S4830	44
AS1 DPDF M	96	AU 2848 A	66	AW1 C4872 L	47	AW1 S6024	44
AS1 DPDFG	97	AU 2848 TC	65	AW1 C4872 R	47	AW1 S6030	44
AS1 PT	98	AU 2860 A	66	AW1 C4872 S	47	AW1 S6624	44
AS1 SDF M	96	AU 2860 TC	65	AW1 C4884 D	47	AW1 S7224	44
AS1 SDFO	96	AU 2872 TC	65	AW1 C4884 L	47	AW1 S7230	44
AS1 SFF M	96	AU1 CL12	68	AW1 C4884 R	47	AW1 S8424	44
AS1 SPAD	99, 100	AU1 CL21	68	AW1 C4884 S	47	AW1 S8430	44
AS1 SPDF M	96	AU1 CL28	68	AW1 C6036 S	46	AWF1CR24L	61
AS1 SPDFG	97	AU1 CS	68	AW1 C6042 L	46	AWF1CR24N	61
AS1-SFF G	97	AU1 CT12	68	AW1 C6042 R	46	AWF1CR24R	61
AT1 D50A	105	AU1 CT21	68	AW1 C6042 S	46	AWM1 S36	55
AT1 D50F	105	AU1 CT28	68	AW1 C6048 D	46	AWM1 S42	55
AT1 D62A	105	AU1 PC12	73	AW1 C6048 L	46	AWM1 S48	55
AT1 D62F	105	AU1 PC21	73	AW1 C6048 R	46	AWM1 S60	55
AT1 E24LA	104	AU1 PC28	73	AW1 C6048 S	46	AWM1 S66	55
AT1 E24LF	104	AU1 X112	68	AW1 C6060 D	45	AWM1 S72	55



<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AWM1 S78	55	AWM2 F6024	50	AX1 R36464	31	AY1 1648S A	72
AWM1 S84	55	AWM2 F6030	50	AX1 R37939	31	AY1 1660M	69
AWM2 C3660 S	52	AWM2 F6624	50	AX1 R37948	31	AY1 1660M A	71
AWM2 C3672 S	52	AWM2 F6630	50	AX1 R37964	31	AY1 1660S	70
AWM2 C4242 D	53	AWM2 F7224	50	AX1 S	21	AY1 1660S A	72
AWM2 C4242 L	53	AWM2 F7230	50	AX1 STC39 3	21	AY1 2124C	69
AWM2 C4242 R	53	AWM2 F7824	50	AX1 STC39 L3	21	AY1 2124C A	71
AWM2 C4242 S	53	AWM2 F7830	50	AX1 STC48 3	21	AY1 2136C	69
AWM2 C4260 L	52	AWM2 F8424	50	AX1 STC48 L3	21	AY1 2136C A	71
AWM2 C4260 R	52	AWM2 F9024	50	AX1 STC64 3	21	AY1 2148C	69
AWM2 C4260 S	52	AWM2 F9030	50	AX1 STC64 L3	21	AY1 2148C A	71
AWM2 C4272 L	52	AWM2 F9624	50	AX1 SWS39	21	AY1 2160C	69
AWM2 C4272 R	52	AWM2 F9630	50	AX1 SWS48	21	AY1 2160C A	71
AWM2 C4272 S	52	AWM2 P4875 S	54	AX1 SWS64	21	AY1 2518M	69
AWM2 C4848 D	53	AWM2 P4887 S	54	AX1 T18	22	AY1 2518M A	71
AWM2 C4848 L	53	AWM2 P7548 S	53	AX1 T39	20	AY1 2524M	69
AWM2 C4848 R	53	AWM2 P8748 S	53	AX1 T48	20	AY1 2524M A	71
AWM2 C4848 S	53	AX1 AK1	24	AX1 T64	20	AY1 2530M	69
AWM2 C4860 D	52	AX1 AK3	24	AX1 V18	22	AY1 2530M A	71
AWM2 C4860 L	52	AX1 E40	30	AX1 X18	22	AY1 2536M	69
AWM2 C4860 R	52	AX1 E48	30	AX1 X39	20	AY1 2536M A	71
AWM2 C4860 S	52	AX1 E53	30	AX1 X48	20	AY1 2542M	69
AWM2 C4872 D	52	AX1 E60	30	AX1 X64	20	AY1 2542M A	71
AWM2 C4872 L	52	AX1 E65	30	AX1 Y18	22	AY1 2548M	69
AWM2 C4872 R	52	AX1 EET39(T,R,L)	30	AX2 C3939	29	AY1 2548M A	71
AWM2 C4872 S	52	AX1 EET48(T,R,L)	30	AX2 C4839	29	AY1 2560M	69
AWM2 C4884 D	52	AX1 EET64(T,R,L)	30	AX2 C4848	29	AY1 2560M A	71
AWM2 C4884 L	52	AX1 EGF11	30	AX2 C6439	29	AY1 2824C	69
AWM2 C4884 R	52	AX1 EGF16	30	AX2 C6448	29	AY1 2836C	69
AWM2 C4884 S	52	AX1 EGF24	30	AX2 C6464	29	AY1 2848C	69
AWM2 C6036 S	51	AX1 ECF4	30	AX3E41	30	AY1 2860C	69
AWM2 C6042 L	51	AX1 F18	23	AX3E49	30	AY1 AXST16	77
AWM2 C6042 R	51	AX1 F39	21	AX3E61	30	AY1 AXT16	77
AWM2 C6042 S	51	AX1 F48	21	AX3E64	30	AY1 AXT25	77
AWM2 C6048 D	51	AX1 F64	21	AY1 1224C	69	AY1 AXT32	77
AWM2 C6048 L	51	AX1 FF	9	AY1 1224C A	71	AY1 CE	74
AWM2 C6048 R	51	AX1 FHLS4818	24	AY1 1236C	69	AY1 CL12	76
AWM2 C6048 S	51	AX1 FWS 39	24	AY1 1236C A	71	AY1 CL21	76
AWM2 C6060 D	53	AX1 FWS 48	24	AY1 1248C	69	AY1 CL28	76
AWM2 C6060 L	53	AX1 FWS 64	24	AY1 1248C A	71	AY1 CMK	76
AWM2 C6060 R	53	AX1 HLS4839	21	AY1 1260C	69	AY1 CS	74
AWM2 C6060 S	53	AX1 HLS6439	21	AY1 1260C A	71	AY1 CT12	76
AWM2 C7236 S	51	AX1 HLS6448	21	AY1 1618M	69	AY1 CT21	76
AWM2 C7242 L	51	AX1 L18	22	AY1 1618M A	71	AY1 CT28	76
AWM2 C7242 R	51	AX1 L39	20	AY1 1618S	70	AY1 CX12	77
AWM2 C7242 S	51	AX1 L48	20	AY1 1618S A	72	AY1 CX21	77
AWM2 C7248 D	51	AX1 L64	20	AY1 1624M	69	AY1 CX28	77
AWM2 C7248 L	51	AX1 LEG	9	AY1 1624M A	71	AY1 HLA	76
AWM2 C7248 R	51	AX1 M3939	29	AY1 1624S	70	AY1 LL16	74
AWM2 C7248 S	51	AX1 M4239	29	AY1 1624S A	72	AY1 LL25	74
AWM2 C8448 D	51	AX1 M4839	29	AY1 1630M	69	AY1 LL32	74
AWM2 C8448 L	51	AX1 M4848	29	AY1 1630M A	71	AY1 LP16	75
AWM2 C8448 R	51	AX1 M5639	29	AY1 1630S	70	AY1 LP25	75
AWM2 C8448 S	51	AX1 M5648	29	AY1 1630S A	72	AY1 LP32	75
AWM2 F2424	50	AX1 M6439	29	AY1 1636M	69	AY1 LT16	74
AWM2 F3024	50	AX1 M6448	29	AY1 1636M A	71	AY1 LT25	74
AWM2 F3030	50	AX1 M6464	29	AY1 1636S	70	AY1 LT32	74
AWM2 F3624	50	AX1 M8039	29	AY1 1636S A	72	AY1 LX16	75
AWM2 F3630	50	AX1 M8048	29	AY1 1642M	69	AY1 LX25	75
AWM2 F4224	50	AX1 M8064	29	AY1 1642M A	71	AY1 LX32	75
AWM2 F4230	50	AX1 R34239	31	AY1 1642S	70	AY1 MMK	76
AWM2 F4824	50	AX1 R34939	31	AY1 1642S A	72	AY1 PC16	73
AWM2 F4830	50	AX1 R34948	31	AY1 1648M	69	AY1 PC25	73
AWM2 F5424	50	AX1 R36439	31	AY1 1648M A	71	AY1 PC32	73
AWM2 F5430	50	AX1 R36448	31	AY1 1648S	70	AY1 SCL16	76

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AY1 SCT16	76	RO1-HP12	89
AY1 SCX16	77	RO1-HP15	89
AY1 SL16	74	RO1-HP6	89
AY1 SMK	76	RO1-HP9	89
AY1 SP16	75	RO1-PULL	92
AY1 SPC16	73	RO3-N24	91
AY1 ST16	74	RO3-N30	91
AY1 SX116	77	RO3-N36	91
AY1 SX16	75	RO3-N42	91
AY1 SX316	77	RO3-N48	91
AY1 X112	77	RO3-N60	91
AY1 X121	77	RO3-N66	91
AY1 X128	77	RO3-N72	91
AY1 X312	77	RO3-OM30	89
AY1 X321	77	RO3-OM36	89
AY1 X328	77	RO3-OM42	89
AZ1 0936H	138	RO3-OM48	89
AZ1 0942H	138	RO3-OM60	89
AZ1 0948H	138	RO3-OM72	89
AZ1 0960H	138	RO3-ON30	89
AZ1 0972H	138	RO3-ON36	89
AZ1 1836F	139	RO3-ON42	89
AZ1 1842F	139	RO3-ON48	89
AZ1 1848F	139	RO3-ON60	89
AZ1 1860F	139	RO3-ON72	89
AZ1 1872F	139	RO3-RD30	89
AZ1 2736F	139	RO3-RD36	89
AZ1 2742F	139	RO3-RD42	89
AZ1 2748F	139	RO3-RD48	89
AZ1 2760F	139	RO3-RD60	89
AZ1 2772F	139	RO3-RD72	89
AZ1 CL18	140	RO3-VP	89
AZ1 CL27	140	RS1 MPB	94
AZ1 CL36	140	RS1-M24	90
AZ1 CS	140	RS1-M30	90
AZ1 U0936T	140	RS1-M36	90
AZ1 U0942T	140	RS1-M42	90
AZ1 U0948T	140	RS1-M48	90
AZ1 U0960T	140	RS1-M60	90
MC1-39S1	83	RS1-N24	90
MC1-48S1	83	RS1-N30	90
MC1-64S1	83	RS1-N36	90
MD6-BD	98	RS1-N42	90
MD6-FS	98	RS1-N48	90
MM2-CG	82	RS1-N60	90
MR3 ATT2	43	RT1T18E(L/R)	93
MR3 ATT3	43	RT1-T18(L/R)	93
MR3 PDCX	43	RT1T24E(L/R)	93
R3BOP0F4207	32	RT1-T24(L/R)	93
R3BOP0F4907	32	RT1T36E(L/R)	93
R3BOP0F6407	32	RT1-T36(L/R)	93
R3BOP0F7907	32	RT1T48E(L/R)	93
R3BOP0H4207	32	RT1-T48(L/R)	93
R3BOP0H4907	32	RT1-TD18(L/R)	93
R3BOP0H6407	32	RT1-TD24(L/R)	93
R3BOP0H7907	32	RT1-TD36(L/R)	93
R3BOT0F4207	32	RT1-TD48(L/R)	93
R3BOT0F4907	32	RT2-F18(L/R)	93
R3BOT0F6407	32	RT2-F24(L/R)	93
R3BOT0F7907	32	RT2-F36(L/R)	93
R3BOT0H4207	32	RT2-F48(L/R)	93
R3BOT0H4907	32	RT2-FD18(L/R)	93
R3BOT0H6407	32	RT2-FD24(L/R)	93
R3BOT0H7907	32	RT2-FD36(L/R)	93
RO1-CB	92	RT2-FD48(L/R)	93

# Selling Policy

---

	<p>This Selling Policy supercedes all previous selling policies. Prices, discounts and product offerings are subject to change without notice.</p>
<b>Terms &amp; Conditions of Sales</b>	<p>Sales by Knoll, Inc. or Knoll North America Corp. ("Seller") of Knoll Product Lines (hereinafter "Products") within the United States and Canada are made only on the terms which are contained in this Selling Policy. Seller hereby gives notice of its objection to any different or additional terms and conditions. This sale is expressly conditional upon Purchaser's assent to the terms and conditions set forth below. Additional terms and conditions may apply to KnollStudio and KnollTextiles orders. These terms and conditions may be modified or supplemented only by a written document signed by an authorized representative of Seller. These terms and conditions supercede any prior and/or contemporaneous agreements or correspondence between Purchaser and Seller. Written quotations expire thirty (30) days from the date of issuance and can be withdrawn by written notice anytime during that period. Where Purchaser and Seller have entered into the Knoll Electronic Terms and Conditions, all orders, acknowledgements, invoices and other business communications placed or transmitted in accordance with the Knoll Electronic Terms and Conditions shall be deemed to be in writing and signed and shall be valid for all purposes as if they were originated and maintained in documentary form.</p>
<b>Ordering Information</b>	<p>All orders must be in writing. The product pattern number(s) contained on Seller's order acknowledgement shall be the final expression of the order.</p>
<b>Order Confirmation</b>	<p>A purchase order is not binding on Seller until Purchaser has received Seller's order confirmation or acknowledgment.</p>
<b>Pricing Policies</b>	<p>List prices are subject to change without notice.</p> <p>List prices shall be those prices in effect on the date of receipt of a complete purchase order unless shipment is requested more than one hundred twenty (120) days after order entry in which case prices in effect on the date of shipment apply. List prices include specified freight costs. Unless specified in writing by Seller, no other charges are included in Seller's list prices.</p>
<b>Taxes</b>	<p>All sales, use, excise and other taxes applicable to the sale of the Products shall be paid by Purchaser. If Purchaser claims an exemption from any tax, Purchaser shall submit to Seller the appropriate exemption certificates.</p>
<b>Terms of Payment</b>	<p>Payment for one hundred percent (100%) of the net order amount is due within thirty (30) days of the date of invoice, which is issued upon shipment. In case of any discrepancies, such as shortages, and Seller is notified in writing within ten (10) days of receipt of Product, only that portion may be deducted and the balance paid. For orders greater than \$100,000 net, a one-third (1/3) deposit is due at the time of order placement, with the remainder due within thirty (30) days of the date of invoice.</p> <p>KnollStudio orders less than \$2,000 require payment for one hundred percent (100%) of the net order amount (including any applicable sales tax and charges for inside delivery, special packaging, etc.), due at time of order placement. For KnollStudio orders greater than \$2,000, a one-half (50%) deposit is due at time of order placement with the remainder (including any applicable sales tax and charges for inside delivery, special packaging, etc.) due prior to shipment.</p> <p>If, in the judgment of Seller, Purchaser's financial condition does not justify the terms of the payment, Seller may require full or partial payment in advance.</p> <p>Past due accounts shall be charged one and one-half percent (1.5%) per month, or the highest rate permitted by law, whichever is less, and will be added to the outstanding balance. In the event Purchaser defaults on payment, Purchaser shall be liable for all collection costs, including reasonable attorney's fees and costs.</p>
<b>Changes and Cancellation</b>	<p>Purchase orders may not be changed or cancelled, in whole or in part, without prior written consent of Seller. Changes may effect delivery dates. Expenses incurred because of changes shall be charged to Purchaser. In the event of cancellations, Purchaser will be liable for reasonable cancellation charges established by Seller. Orders for special Product, orders including "COM" (hereinafter defined) material and orders pursuant to expedited delivery programs, may not be canceled.</p>
<b>Freight Prepaid</b>	<p>Freight is prepaid and included in the price of all Products, except KnollTextiles, within the 48 contiguous United States and Canada, excluding the Yukon, Northwest Territories, Nunavut and Newfoundland. Packing is tested for rigorous motion and transportation but is not guaranteed to protect furniture from conditions over which the Seller has no control. If special packaging is required for any reason, please consult with your sales representative or dealer. Seller shall select the method of shipment and routing. All shipments shall be tailgate deliveries. Freight for all KnollTextiles orders is prepaid and added to the invoice.</p>
<b>Delivery/Freight Charges</b>	<p>Shipments outside the contiguous 48 United States and Canada shall be shipped F.O.B. Origin.</p> <p>For shipments outside the contiguous United States and Canada, Purchaser is responsible for the cost of freight from point of embarkation, including any handling and transportation charges incidental to loading at the point of departure and unloading at the final destination.</p> <p>Conditions beyond the control of Seller, including weather, available facilities and traffic conditions, may affect exact time of delivery. Seller shall not be responsible for specific carrier delivery date or time unless it has made a specific delivery commitment, in writing.</p> <p>Nonstandard methods of shipment and/or additional services are available upon request. Purchaser will be billed for the differential cost of any special services in excess of standard surface carrier freight costs. Premium charges, at Purchaser's request, will be added for airfreight, exclusive use of vehicle and extra, export or special packaging. Accessorial charges will be added for inside delivery, extra labor, reconsignment and redelivery.</p> <p>Partial shipments may be made and invoiced by Seller.</p>
<b>Claims</b>	<p>All shipments for all Knoll Products within the contiguous United States and Canada are F.O.B. Origin. Risk of loss passes to Purchaser at time of delivery to carrier. Purchaser shall inspect all Products upon receipt and notify Seller within ten (10) working days after receipt of any damage or defects which are, or should be, apparent from an inspection of the Product and its packaging. Failure of Purchaser to make a claim against carrier or notify Seller during the ten (10) working day period shall constitute acceptance of the Products and waiver of any apparent defects, errors or shortages. Seller will agree to repair or replace Product damaged in shipment if Purchaser has notified Seller of freight damage within ten (10) working days after receipt and assigns its rights against the carrier.</p>
<b>Seller's Security Interest</b>	<p>Until Seller receives the full payment for the Product, Seller shall have a security interest in the Product. Purchaser agrees to perform all acts, including but not limited to the execution and filing of documentation, which may be necessary to perfect and assure the security interest of Seller.</p>
<b>Returns</b>	<p>The return of Products without a written authorization by Seller shall not be accepted. To receive authorization for Product return, please call Customer Service. All Products that are returned pursuant to a valid authorization shall be subject to a twenty-five percent (25%) of list restocking charge. Products not currently offered for sale by Seller (including COM) shall not be authorized for return. All returned Products must be unused, in original condition and in the original Seller packing cartons. No refund or credit shall be given for damaged Products.</p>
<b>Held Orders/Storage</b>	<p>If Purchaser requests that an order be held or delayed, prices and terms and conditions in effect at the time of shipment shall apply. If Purchaser requests a delay after the time when Seller can defer production, Purchaser will be invoiced for the Product, payable in accordance with standard terms, when the order is ready for shipment. Seller may transfer the Product to storage, in which case all expenses incurred in connection with storage, including demurrage, preparation for storage, storage charges and handling shall be payable by Purchaser upon submission of invoices by Seller. Risk of loss to the Product shall pass to the Purchaser upon delivery of the Product into storage.</p>

# Selling Policy

<b>Customer's Own Material</b>	A Purchaser who requests a fabric or other surface material not standard to Seller's line of Products ("COM") must submit samples of the requested material to Seller prior to entry of a purchaser order. Seller shall determine if the material is suitable to its manufacturing processes and meets any requirements of Underwriters Laboratories. If the COM is acceptable, Seller will then establish a price for using the COM or the Product in question. For a description of the procedures for submitting samples and testing, contact customer resources or your sales representative. Seller shall have no responsibility for the appearance, condition, performance, durability, colorfastness or any other physical attribute of the COM. Purchaser shall indemnify and hold Seller harmless for any damages, injuries or losses arising out of or related to use of the COM on the Product.
<b>Warranty</b>	<p>Seller warrants to the original Purchaser only that the Products Seller manufactures and sells to Purchaser are free of defects in workmanship and materials, during the applicable warranty period set forth below.</p> <p>Should any failure to conform with this limited warranty appear to a Product listed below during the applicable warranty period from the date of shipment, Seller shall, upon prompt written notice, repair or replace, at its option and costs, the affected part or parts.</p> <p><i>Product and Period of Warranty</i></p> <p><i>Lifetime: AutoStrada, Calibre, Crinion Open Table, Currents, Dividends, Equity, Morrison, Reff</i> laminate and other non-wood components (except operational parts, controls, electrical, special or custom products, see below)</p> <p><i>10 Years: AutoStrada, Crinion Open Table and Reff</i> wood components, wood casegoods (<i>Crinion, Magnusson, Reference</i>), <i>Interaction</i> tables (except height adjustment mechanisms for <i>Counterforce</i>, crank-adjustable, and split-top tables and worksurfaces, see below), <i>Reuter</i> overheads, <i>Reuter</i> vertical storage, <i>Life, Sapper, RPM, Bulldog</i> and <i>Parachute</i> seating structural and operational parts, controls, casters, pneumatic cylinders (except seating upholstery, finishes and labor, see below)</p> <p><i>5 Years:</i> Operational parts, controls, electrical (except light ballasts and bulbs, see below), special or custom product, wood veneer products, <i>A3, Currents</i> handcrank, <i>Interaction Counterforce, Interaction</i> crank-adjustable, and split-top mechanisms, <i>KnollStudio, KnollExtra</i> adjustable keyboard supports, VDT carousel, monitor platform, equipment storage drawers and all universal storage drawers, <i>Open Up, Visor</i> and <i>SoHo</i> seating structural and operational parts, controls, pneumatic cylinders (except seating upholstery, finishes and labor, see below)</p> <p><i>3 Years:</i> Upholstery, finishes and labor to repair the following chairs: <i>Life, Sapper, RPM, Bulldog, Parachute, Open Up</i> and <i>SoHo</i>.</p> <p><i>2 Years:</i> All other <i>KnollExtra</i> product</p> <p><i>1 Year:</i> Light ballasts and bulbs and <i>Equity</i> fiberglass panels, seating upholstered armpads and soft armpads, <i>Visor</i> finishes and labor to repair.</p> <p>This warranty does not apply to:</p> <ul style="list-style-type: none"><li>• Damage caused by a carrier other than the Seller.</li><li>• Normal wear and tear or acts or omissions of parties other than Seller (including user modification).</li><li>• COM or other third party materials applied to Products.</li><li>• Products not installed by or under the auspices of a certified dealer of Seller.</li><li>• Dramatic temperature variations or exposure to unusual conditions.</li><li>• Except as specifically noted above, textiles and upholstery supplied by <i>KnollTextiles</i> (consult current <i>KnollTextiles</i> price list for applicable warranty).</li></ul> <p>Natural variations occurring in wood, marble, and leather shall not be considered defects, and the Seller does not guarantee the colorfastness or matching of the colors, grains or textures, or surface hardness of such materials. The Seller also does not guarantee the colorfastness of fiberglass panel surfaces. THE EXPRESS WARRANTIES CONTAINED HEREIN ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE AND ALL OTHER WARRANTIES ARISING FROM COURSE OF DEALING OR USAGE OF TRADE.</p> <p>The remedies provided above are the Purchaser's sole remedies for any failure of Seller to comply with its obligations regarding the workmanship of its Products. Correction of any nonconformity in the manner and for the period of time provided shall constitute complete fulfillment of all liabilities of Seller, with respect to or arising out of the Product furnished hereunder.</p>
<b>Delay/Force Majeure</b>	Seller shall not be liable for failure to perform or for delay in performance due to fire, flood, strike or other labor difficulty, act of God, act of any governmental authority or of the Purchaser, riot, embargo, fuel or energy shortage, wrecks or delay in transportation, inability to obtain necessary labor, materials or manufacturing facilities from usual sources or failure of suppliers to meet their contractual obligations, or due to any cause beyond its reasonable control. If any such event occurs, Seller may extend delivery dates by a period of time necessary to overcome the effect of such delay, allocate available Product or cancel any purchase order.
<b>Compliance with Law</b>	<b>PURCHASER IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL LAWS, ORDINANCES, REGULATIONS, RULES AND STANDARDS RELATING TO THE INSTALLATION, MAINTENANCE, USE AND OPERATION OF THE PRODUCTS.</b>
<b>Patents</b>	<p>Subject to the following provisions, Seller shall, at its own expense, defend or, at its option, settle any claim, suit or proceeding brought against the Purchaser, and/or its vendees, mediate and immediate, so far as based on an allegation that any Product or any part thereof furnished hereunder constitutes a direct or a contributory infringement of any claim of any patent of the United States or Canada. This obligation shall be effective only if Purchaser shall have made all payments then due hereunder and if Seller is notified promptly in writing and given authority, information and assistance for the defense of said claim, suit or proceeding. Seller shall pay all damages and costs awarded in such suit or proceedings so defended.</p> <p>The foregoing indemnity does not apply to the following:</p> <ul style="list-style-type: none"><li>• Products supplied according to a design other than that of Seller, and which is required by the Purchaser.</li><li>• Combination of the Product with another product not furnished hereunder unless Seller is a contributory infringer.</li><li>• Any settlements of a suit or proceeding made without Seller's written consent.</li></ul>
<b>Limitations of Liability</b>	<b>SELLER, ITS CONTRACTORS, AUTHORIZED DEALERS AND SUBCONTRACTORS OR SUPPLIERS OF ANY TIER SHALL NOT BE LIABLE TO PURCHASER FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM A BREACH OF THIS AGREEMENT.</b>
	Purchaser's remedies set forth herein are exclusive and the liability of Seller with respect to the breach of this agreement or any contract entered into between the parties pursuant hereto shall not exceed the price of the Product or part on which such liability is based.

# KnollKey Lock Program

## KnollKey Lock Program General Information

Following is the KnollKey lock policy, applicable to all products.

### Key-alike

For the convenience of the user, furniture may be keyed alike at no charge. Write "Key-alike" in the description of your purchase order for any pedestal, overhead, file or other item you wish to have keyed alike.

Using the key-alike instructions, order cores and keys as line items on your purchase order. Do NOT submit a key-alike form. The Knoll East Greenville Lock Center will select key numbers from the standard range of K 001 - K 250. Key numbers will not be repeated unless over 250 sets are ordered. Lock cores keyed-alike will ship separately from the product, ready for field installation.

There is no charge for key-alike orders if placed with the furniture order.

**IF THE KEY-ALIKE ORDER IS NOT PLACED AT LEAST TWO WEEKS PRIOR TO THE FURNITURE SHIP DATE, A \$50 HANDLING CHARGE AND AIR FREIGHT CHARGES WILL APPLY.**

**If product is ordered and shipped random-keyed, additional lock cores for key-alike are billable.**

### Random-Keying

To specify product keyed-random, write "key-random" in the product description. Random-keyed product is shipped with the lock core factory installed. A shrouded key is included. Random means no effort has been made to match key numbers, or to make them different.

### Keys

A Knoll shrouded key is shipped with every lock core. 250 Key numbers are available. For numbers above 250, contact Custom Product Development. Additional keys and key blanks are available. See service parts for more information.

### Master Keying

Knoll locks can be controlled by means of a master key. There is no additional per-lock charge for master keying. A letter of approval from the client must accompany orders for master keys.

### Installing Lock Cores

Lock cores can be installed or removed in the field by using a change key. Cores must be in the unlocked position to be removed. See service parts for change key pattern number and pricing.

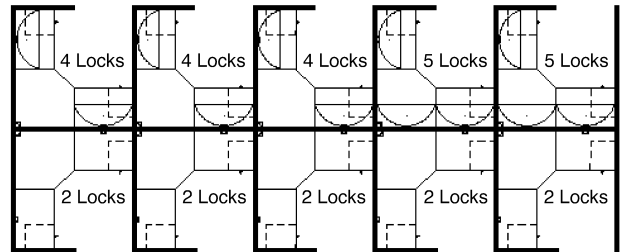
### Lock Distribution

All orders for key-alike lock cores/keys are packaged and shipped from the East Greenville Lock Center, regardless of where the pedestals, overhead, or other units are produced. KnollNow and random keyed product will have cores factory-installed.

## How to Specify Key-Alike

Following is an example of how to specify key-alike for a cluster of 10 workstations.

**Step 1** - Using the project floorplan, count the number of locks in each workstation.



**Step 2** - Count the number of workstations with the same quantity of locks. Group together the workstations with a like number of locks.

5 workstations with 2 locks per station  
3 workstations with 4 locks per station  
2 workstations with 5 locks per station

**Step 3** - For the first group (5 sets of 2 locks), enter the number of workstations in the quantity column.

Qty	Pattern #	Description	Unit List	Ext. List
5				

**Step 4** - Then enter the pattern number "KSPEC\_ \_" and add a suffix for the number of locks for that group (i.e., for 2 locks per station, add the suffix "2"). Up to 30 lock cores are available in a set (i.e., KSPEC 30).

Qty	Pattern #	Description	Unit List	Ext. List
5	KSPEC 2	Set of 2 cores/keys	N / C	N / C

**Step 5** - Repeat for other groups.

Qty	Pattern #	Description	Unit List	Ext. List
5	KSPEC 2	Set of 2 cores/keys	N / C	N / C
3	KSPEC 4	Set of 4 cores/keys	N / C	N / C
2	KSPEC 5	Set of 5 cores/keys	N / C	N / C

Your Key instructions are complete.

Knoll will select key numbers for each set from 250 available numbers. Additional key numbers are available through Custom Product Development. **For additions to existing installations, specify desired key numbers in the description.**

## Service Parts

Pattern #	Description	List Price
KKEY_ _ _	Shrouded Key Specify key number desired	\$5
KBLANK	Shrouded Key Blank	\$5
KSPECB_ _ _	Retrofit Universal Core/Key Specify key number desired	\$18
KCHANGE	Change Key	\$5
KMASTER*	Master Key	\$5

\*Note: A letter of approval on company letterhead from the client must accompany all orders for master keys.

# General Ordering Information

---

## **The Products**

This guide encompasses all standard products for this product group.

## **Sizes**

Dimensions listed in this guide are indicated as:

H = height

W = width

D = depth

Dia. = diameter

Rad. = radius

## **Pricing**

All prices shown are list.

## **How to Order**

Select pattern numbers and quantities required for your complete installation. Product questions can be addressed in the specific sections of this guide or by contacting your sales representative or customer resource representative at 1-800-343-5665.

Next, select options (if required), along with colors and finishes appropriate to each product. Reference the Finishes and Fabrics pages for color designations.

On large installations, an item's "designated area" can be specified to assist in product organization and handling.

To expedite complete / correct entry of your order, be certain all pattern numbers, quantities, colors and area identifications are completely specified. Also, include complete purchase order numbers, bill-to and ship-to addresses, a contact name and specific factory shipping dates required.

## **Mail all orders to:**

Knoll, Inc.

1235 Water Street

P.O. Box 157

East Greenville, PA 18041

Attention: Order Entry

Once your order is entered at Knoll, an acknowledgment will be mailed to you. You will be advised of your scheduled shipping date within five days of the original acknowledgment. If it is necessary to revise your order, please contact your customer resource representative.

## Sustainability Statement

---

Sustainable design is a key component of Knoll's environmental focus. Our commitment to social responsibility and a healthy environment has prompted us to further articulate our longstanding environmental programs and, with encouragement and support from our colleagues in the industry, we have re-energized our focus on such "green" initiatives as life cycle analysis and LEED™ certification. Knoll is proud to have contributed to projects that have received LEED certification from the U.S. Green Building Council.

For the latest information on Knoll products that help our customers achieve LEED certification, log on to [knoll.com](http://knoll.com), click on "About Knoll" and then "Environmental Focus."